

System Generator for DSP

Reference Guide

Release 10.1.3 September, 2008





Xilinx is disclosing this Document and Intellectual Property (hereinafter "the Design") to you for use in the development of designs to operate on, or interface with Xilinx FPGAs. Except as stated herein, none of the Design may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form or by any means including, but not limited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Xilinx. Any unauthorized use of the Design may violate copyright laws, trademark laws, the laws of privacy and publicity, and communications regulations and statutes.

Xilinx does not assume any liability arising out of the application or use of the Design; nor does Xilinx convey any license under its patents, copyrights, or any rights of others. You are responsible for obtaining any rights you may require for your use or implementation of the Design. Xilinx reserves the right to make changes, at any time, to the Design as deemed desirable in the sole discretion of Xilinx. Xilinx assumes no obligation to correct any errors contained herein or to advise you of any correction if such be made. Xilinx will not assume any liability for the accuracy or correctness of any engineering or technical support or assistance provided to you in connection with the Design.

THE DESIGN IS PROVIDED "AS IS" WITH ALL FAULTS, AND THE ENTIRE RISK AS TO ITS FUNCTION AND IMPLEMENTATION IS WITH YOU. YOU ACKNOWLEDGE AND AGREE THAT YOU HAVE NOT RELIED ON ANY ORAL OR WRITTEN INFORMATION OR ADVICE, WHETHER GIVEN BY XILINX, OR ITS AGENTS OR EMPLOYEES. XILINX MAKES NO OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED, OR STATUTORY, REGARDING THE DESIGN, INCLUDING ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT OF THIRD-PARTY RIGHTS.

IN NO EVENT WILL XILINX BE LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, EXEMPLARY, SPECIAL, OR INCIDENTAL DAMAGES, INCLUDING ANY LOST DATA AND LOST PROFITS, ARISING FROM OR RELATING TO YOUR USE OF THE DESIGN, EVEN IF YOU HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE TOTAL CUMULATIVE LIABILITY OF XILINX IN CONNECTION WITH YOUR USE OF THE DESIGN, WHETHER IN CONTRACT OR TORT OR OTHERWISE, WILL IN NO EVENT EXCEED THE AMOUNT OF FEES PAID BY YOU TO XILINX HEREUNDER FOR USE OF THE DESIGN. YOU ACKNOWLEDGE THAT THE FEES, IF ANY, REFLECT THE ALLOCATION OF RISK SET FORTH IN THIS AGREEMENT AND THAT XILINX WOULD NOT MAKE AVAILABLE THE DESIGN TO YOU WITHOUT THESE LIMITATIONS OF LIABILITY.

The Design is not designed or intended for use in the development of on-line control equipment in hazardous environments requiring fail-safe controls, such as in the operation of nuclear facilities, aircraft navigation or communications systems, air traffic control, life support, or weapons systems ("High-Risk Applications"). Xilinx specifically disclaims any express or implied warranties of fitness for such High-Risk Applications. You represent that use of the Design in such High-Risk Applications is fully at your risk.

© 2002-2008 Xilinx, Inc. All rights reserved. XILINX, the Xilinx logo, and other designated brands included herein are trademarks of Xilinx, Inc. PowerPC is a trademark of IBM, Inc. All other trademarks are the property of their respective owners.

Table of Contents

Preface: About This Guide

Guide Contents	19
System Generator PDF Doc Set	19
Additional Resources	19
Conventions	20
Typographical	20
Online Document	20

Chapter 1: Xilinx Blockset

Organization of Blockset Libraries	24
Basic Element Blocks	24
Communication Blocks	27
Control Logic Blocks	27
Data Type Blocks	29
DSP Blocks	30
Index Blocks	31
Math Blocks	39
Memory Blocks	41
Shared Memory Blocks	42
Tool Blocks	42
Common Options in Block Parameters Dialog Boxes	44
Precision	44
Arithmetic Type	44
Number of Bits	44
Binary Point	44
Overflow and Quantization	44
Latency	45
Override with Doubles	45
Provide Synchronous Reset Port	46
Provide Enable Port	46
Sample Period	46
Use Behavioral HDL (otherwise use core)	46
Use Core Placement Information	46
Placement	47
FPGA Area (Slices, FFs, LUTs, IOBs, Embedded Mults, TBUFs) / Use Area Above For Estimation	47
Block Reference Pages	48
Accumulator	49
Block Interface	49
Block Parameters	49
Xilinx LogiCORE	50
Addressable Shift Register	51
Block Interface	51
Block Parameters	52
Xilinx LogiCORE	52
AddSub	53
Block Parameters	53
Xilinx LogiCORE	54
Assert	55
Block Parameters	55

Using the Assert block to Resolve Rates and Types	55
BitBasher	57
Block Parameters	57
Supported Verilog Constructs	57
Limitations	59
Black Box	60
Requirements on HDL for Black Boxes	60
The Black Box Configuration Wizard	61
The Black Box Configuration M-Function	62
Sample Periods	63
Block Parameters	64
Data Type Translation for HDL Co-Simulation	65
An Example	66
See Also	66
ChipScope	67
Hardware and Software Requirements	67
Block Parameters	68
ChipScope Project File	69
Importing Data Into MATLAB Workspace From ChipScope	69
Known Issues	70
More Information	70
CIC Compiler 1.1	71
Block Parameters Dialog Box	71
Xilinx LogiCORE	72
CIC Compiler 1.2	73
Block Parameters Dialog Box	73
Xilinx LogiCORE	74
Clock Enable Probe	75
Clock Probe	77
CMult	78
Block Parameters	78
Xilinx LogiCORE	79
Concat	80
Block Interface	80
Block Parameters	80
Configurable Subsystem Manager	81
Block Parameters	82
Constant	83
Block Parameters	83
Appendix: DSP48 Control Instruction Format	84
Convert	86
Block Parameters	86
Convolutional Encoder v3_0	87
Block Interface	87
Block Parameters	87
Xilinx LogiCORE	88
Convolutional Encoder v6_0	89
Block Interface	89
Block Parameters Dialog Box	89
Xilinx LogiCORE	90

Convolutional Encoder v6_1	91
Block Interface	91
Block Parameters Dialog Box	91
Xilinx LogiCORE	92
Counter	93
Block Parameters	94
Xilinx LogiCORE	95
DAFIR v9_0	96
Block Interface	96
Reloading Coefficients	97
Optional Ports for Reloading Coefficients	97
Block Parameters Dialog Box	98
Xilinx LogiCORE	98
DDS Compiler v1_1	99
Block Interface	100
Block Parameters	101
Xilinx LogiCORE	102
DDS Compiler v2_0	103
Block Interface	104
Block Parameters	105
Xilinx LogiCORE	106
DDS Compiler 2.1	107
Block Interface	108
Block Parameters	109
Xilinx LogiCORE	110
DDS v4_0	111
Block Parameters	111
Xilinx LogiCORE	112
DDS v5_0	113
Block Ports	113
Block Parameters	114
Xilinx LogiCORE	115
Delay	116
Block Parameters	116
Logic Synthesis using Behavioral HDL	117
Logic Synthesis using Structural HDL	117
Implementing Long Delays	119
Re-settable Delays and Initial Values	119
Xilinx LogiCORE	119
Depuncture	120
Block Parameters	121
Disregard Subsystem	122
Divider Generator 2.0	123
Block Parameters	123
Xilinx LogiCORE	124
Down Sample	125
Zero Latency Down Sample	125
Down Sample with Latency	126
Block Parameters	127
Xilinx LogiCORE	127

DSP48	128
Block Parameters	128
See Also	130
DSP48 Macro	131
Block Interface	131
Block Parameters	131
Entering Opmodes in the DSP48 Macro Block	132
Entering Pipeline Options and Editing Custom Pipeline Options	138
DSP48 Macro Limitations	139
See Also	139
DSP48A	140
Block Parameters	140
See Also	142
DSP48E	143
Block Parameters	143
See Also	147
Dual Port RAM	148
Block Interface	148
Block Parameters	150
Xilinx LogiCORE	151
EDK Processor	154
Memory Map Interface	154
Block Parameters	155
Known Issues	158
Online Documentation for the MicroBlaze Processor	158
Expression	159
Block Parameters	159
Fast Fourier Transform 6.0	160
Theory of Operation	160
Block Interface	160
Block Parameters	163
Block Timing	166
Xilinx LogiCORE	166
FDATool	167
Example of Use	167
FDA Tool Interface	167
FFT v1_0	168
Cooley-Tukey Algorithm	168
Block Interface	168
Block Parameters	169
Block Timing	169
Xilinx LogiCORE	170
FFT v3_1	172
Theory of Operation	172
Block Interface	172
Block Parameters	174
Block Timing	175
Xilinx LogiCORE	175
FFT v3_2	177
Theory of Operation	177
Block Interface	177

Block Parameters	179
Block Timing	180
Xilinx LogiCORE	181
FFT v4_1	182
Theory of Operation	182
Block Interface	182
Block Parameters	184
Block Timing	185
Xilinx LogiCORE	185
FFT v5_0	187
Theory of Operation	187
Block Interface	187
Block Parameters	190
Block Timing	191
Xilinx LogiCORE	191
FIFO	192
Block Parameters	192
FIR Compiler 4.0	193
Block Interface	193
Block Parameters	194
Xilinx LogiCORE	199
FIR Compiler v1_0	200
Block Interface	200
Block Parameters	201
Xilinx LogiCORE	203
Known Issues	203
FIR Compiler v2_0	204
Block Interface	204
Block Parameters	205
Xilinx LogiCORE	207
Known Issues	207
FIR Compiler v3_0	208
Block Interface	208
Reloading Coefficients	209
Block Parameters	211
Xilinx LogiCORE	213
Known Issues	213
FIR Compiler v3_1	214
Block Interface	214
Reloading Coefficients	215
Block Parameters	217
Xilinx LogiCORE	220
Known Issues	220
FIR Compiler v3_2	221
Block Interface	221
Reloading Coefficients	222
Block Parameters	224
Xilinx LogiCORE	227
Known Issues	227
From FIFO	228
Block Parameters	228

Xilinx LogiCORE	229
See Also	229
From Register	230
Block Parameters	230
Crossing Clock Domain	230
See Also	231
Gateway In	232
Gateway Blocks	232
Block Parameters	232
Gateway Out	234
Gateway Blocks	234
Block Parameters	234
Indeterminate Probe	236
Interleaver Deinterleaver v4_0	237
Block Interface	238
Block Parameters	238
Xilinx LogiCORE	238
Interleaver Deinterleaver v5_0	239
Block Interface	240
Block Parameters	240
Xilinx LogiCORE	240
Inverter	241
Block Parameters	241
JTAG Co-Simulation	242
Block Parameters	242
LFSR	244
Block Interface	244
Block Parameters	244
Logical	246
Block Parameters	246
Xilinx LogiCORE	246
MCode	247
Configuring an MCode Block	247
MATLAB Language Support	248
Block Parameters Dialog Box	267
MicroBlaze Processor	268
Block Interface	268
Block Parameters	271
MicroBlaze Software Issues	273
Known Issues	275
Online Documentation for the MicroBlaze Processor	276
See Also	276
ModelSim	277
Block Parameters	277
Fine Points	279
Mult	282
Block Parameters	282
Xilinx LogiCORE	283
Multiple Subsystem Generator	284
Block Parameters	284

Design Generation	284
Multiple Clock Support	287
Files Generated	287
Mux	289
Block Parameters	289
Negate	290
Block Parameters	290
Network-based Ethernet Co-Simulation	291
Block Parameters	291
See Also	292
Opmode	293
Block Parameters	293
Xilinx LogiCORE	294
DSP48 Control Instruction Format	294
DSP48E Control Instruction Format	295
Parallel to Serial	296
Block Interface	296
Block Parameters	296
Pause Simulation	297
Block Parameters	297
PicoBlaze Instruction Display	298
Block Interface	298
Block Parameters	298
Xilinx LogiCORE	298
PicoBlaze Microcontroller	299
Block Interface	299
Block Parameters	299
How to Use the PicoBlaze Assembler	300
Known Issues	300
PicoBlaze Microprocessor Online Documentation	300
Point-to-point Ethernet Co-Simulation	301
Block Parameters	301
See Also	302
Puncture	303
Block Parameters	303
Reed-Solomon Decoder 6.1	304
Block Interface	304
Block Parameters	305
Xilinx LogiCore	307
Reed-Solomon Encoder 6.1	308
Block Interface	309
Block Parameters	309
Xilinx LogiCore	311
Register	312
Block Interface	312
Block Parameters	312
Xilinx LogiCORE	312
Reinterpret	313
Block Parameters	313
Relational	314

Block Parameters	314
Xilinx LogiCORE	314
Reset Generator	315
Block Parameters	315
Resource Estimator	316
Block Parameters	316
Perform Resource Estimation Buttons	317
Blocks Supported by Resource Estimation	317
Known Issues for Resource Estimation	318
ROM	319
Block Parameters	319
Xilinx LogiCORE	320
RS Decoder v5_1	322
Block Interface	322
Block Parameters	323
Xilinx LogiCore	325
RS Decoder v6_0	326
Block Interface	326
Block Parameters	327
Xilinx LogiCore	329
RS Encoder v5_0	330
Block Interface	330
Block Parameters	331
Xilinx LogiCore	333
RS Encoder v6_0	334
Block Interface	334
Block Parameters	335
Xilinx LogiCore	337
Sample Time	338
Scale	339
Block Parameters	339
Xilinx LogiCore	339
Serial to Parallel	340
Block Interface	340
Block Parameters	340
Shared Memory	341
Block Interface	341
Block Parameters	343
Xilinx LogiCORE	344
See Also	344
Shared Memory Read	345
FIFO Transactions	345
Lockable Memory Transactions	345
Block Parameters	346
See Also	346
Shared Memory Write	347
FIFO Transactions	347
Lockable Memory Transactions	347
Block Parameters	348
See Also	348

Shift	349
Block Parameters	349
Xilinx LogiCORE	349
Simulation Multiplexer	350
Using Subsystem for Simulation and Black Box for Hardware	350
Block Parameters	351
SineCosine	352
Block Parameters	352
Xilinx LogiCORE	352
Xilinx LogiCore	353
Single Port RAM	354
Block Interface	354
Block Parameters	354
Write Modes	355
Hardware Notes	356
Xilinx LogiCORE	357
Single-Step Simulation	359
Block Parameters	359
Slice	360
Block Parameters	360
System Generator	361
Block Parameters	361
Threshold	367
Block Parameters	367
Xilinx LogiCORE	367
Time Division Demultiplexer	368
Block Interface	368
Block Parameters	369
Time Division Multiplexer	370
Block Interface	370
Block Parameters	370
To FIFO	371
Block Parameters	371
Xilinx LogiCORE	372
See Also	372
To Register	373
Block Parameters	373
Xilinx LogiCORE	373
Crossing Clock Domains	374
See Also	374
Toolbar	375
Block Interface	375
Toolbar Menus	376
References	376
See Also	376
Up Sample	377
Block Interface	377
Block Parameters	378
Viterbi Decoder v5_0	379
Block Interface	379

Block Parameters	380
Xilinx LogiCore	381
Viterbi Decoder v6_0	382
Block Interface	382
Block Parameters	383
Xilinx LogiCore	384
Viterbi Decoder v6_1	385
Block Interface	385
Block Parameters	386
Xilinx LogiCore	387
WaveScope	388
Quick Tutorial	388
Block Interface	391
Xilinx LogiCORE Versions	399

Chapter 2: Xilinx Reference Blockset

Communication	403
Control Logic	403
DSP	403
Imaging	404
Math	404
2 Channel Decimate by 2 MAC FIR Filter	405
Block Parameters	405
Reference	405
2n+1-tap Linear Phase MAC FIR Filter	406
Block Parameters	406
Reference	406
2n-tap Linear Phase MAC FIR Filter	407
Block Parameters	407
Reference	407
2n-tap MAC FIR Filter	408
Block Parameters	408
Reference	408
4-channel 8-tap Transpose FIR Filter	409
Block Parameters	409
4n-tap MAC FIR Filter	410
Block Parameters	410
Reference	410
5x5Filter	411
Block Parameters	412
BPSK AWGN Channel	413
Block Parameters	413
Reference	413
CIC Filter	414
Block Interface	414
Block Parameters	415
Reference	415
Convolutional Encoder	416
Implementation	416

Block Interface	417
Block Parameters	417
CORDIC ATAN	418
Block Parameters	418
Reference	418
CORDIC DIVIDER	419
Block Parameters	419
Reference	419
CORDIC LOG	420
Block Parameters	420
Reference	421
CORDIC SIN COS	422
Block Parameters	422
Reference	422
CORDIC SQRT	423
Block Parameters	423
Reference	424
Dual Port Memory Interpolation MAC FIR Filter	425
Block Parameters	425
Reference	425
Interpolation Filter	426
Block Parameters	426
Reference	426
m-channel n-tap Transpose FIR Filter	427
Block Parameters	427
Mealy State Machine	428
Example	429
Block Parameters	430
Moore State Machine	432
Example	433
Block Parameters	434
Multipath Fading Channel Model	435
Theory	435
Implementation	436
Block Parameters	436
Functions	437
Data Format	438
Input	439
Output	440
Timing	440
Initialization	440
Demonstrations	440
Hardware Co-Simulation Example	441
Reference	441
n-tap Dual Port Memory MAC FIR Filter	442
Block Parameters	442
Reference	442
n-tap MAC FIR Filter	443
Block Parameters	443
Reference	443

Registered Mealy State Machine	444
Example	445
Block Parameters	446
Registered Moore State Machine	447
Example	448
Block Parameters	449
Virtex Line Buffer	450
Block Parameters	450
Virtex2 Line Buffer	451
Block Parameters	451
Virtex2 5 Line Buffer	452
Block Parameters	452
White Gaussian Noise Generator	453
4-bit Leap-Forward LFSR	453
Box-Muller Method	454
Block Parameters	454
Reference	454

Chapter 3: Xilinx XtremeDSP Kit Blockset

XtremeDSP Analog to Digital Converter	456
Block Parameters	456
Data Sheet	456
XtremeDSP Co-Simulation	457
Block Parameters	457
XtremeDSP Digital to Analog Converter	459
Block Parameters	459
Data Sheet	459
XtremeDSP External RAM	460
Block Parameters	460
XtremeDSP LED Flasher	461
Block Parameters	461

Chapter 4: System Generator Utilities

xlAddTerms	464
Syntax	464
Description	464
Examples	466
Remarks	466
See Also	466
xlfa_denominator	467
Syntax	467
Description	467
See Also	467
xlfa_numerator	468
Syntax	468
Description	468
See Also	468
xlGenerateButton	469
Syntax	469

Description	469
See Also	469
xlgetParam and xlsetparam	470
Syntax	470
Description	470
Examples	470
See Also	470
xlgetparams	471
Syntax	471
Description	471
Examples	471
See Also	471
xlInstallPlugin	472
Syntax	472
Description	472
Examples	472
See Also	472
xlLoadChipScopeData	473
Syntax	473
Description	473
Examples	473
See Also	473
xlSBDBuilder	474
Syntax	474
Description	474
See Also	476
xlSetNonMemMap	477
Syntax	477
Description	477
Examples	477
See Also	477
xlSetUseHDL	478
Syntax	478
Description	478
Examples	478
See Also	478
xlSwitchLibrary	479
Syntax	479
Description	479
Examples	479
xlTBUtills	480
Syntax	480
Description	480
Examples	482
Remarks	483
See Also	483
xlTimingAnalysis	484
Syntax	484
Description	484
Example	484
xlUpdateModel	485

Syntax	485
Description	485
Examples	487
xlVersion	488
Syntax	488
Description	488
See Also	488

Chapter 5: Programmatic Access

System Generator API for Programmatic Generation	489
Introduction	489
xBlock	490
xInport	491
xOutport	491
xSignal	492
xsub2script	492
xBlockHelp	494
PG API Examples	495
Hello World	495
MACC	496
MACC in a Masked Subsystem	497
PG API Error/Warning Handling & Messages	501
xBlock Error Messages	501
xInport Error Messages	501
xOutport Error Messages	502
xSignal Error Messages	502
xsub2script Error Messages	502
C++ Access to Shared Memory Blocks	503
M-Code Access to Hardware Co-Simulation	503
Compiling Hardware for Use with M-Hwcosim	503
M-Hwcosim Simulation Semantics	504
Data Representation	504
Interfacing to Hardware from M-Code	504
M-Hwcosim Examples	505
Automatic Generation of M-Hwcosim Testbench	510
Resource Management	513
M-Hwcosim MATLAB Class	513
M-Hwcosim Shared Memory MATLAB Class	518
M-Hwcosim Shared FIFO MATLAB Class	520
M-Hwcosim Utility Functions	521
SharedMemory	524
Public Types	524
Public Methods	524
Static Public Attributes	524
Protected Types	524
Protected Methods	524
Protected Attributes	524
Member Enumeration	525
Constructors & Destructors	525
Member Functions	526
Member Data	529

LockableSharedMemory	530
Public Types	530
Public Methods	530
Static Public Attributes	530
Member Typedefs	530
Constructors & Destructors	530
Member Functions	531
Member Data	533
SharedMemoryProxy	534
Public Types	534
Public Methods	534
Static Public Attributes	534
Member Typedefs	534
Constructors and Destructors	534
Member Functions	535
Member Data	536
Request Struct	537
Public Types	537
Static Public Attributes	537
Member Enumerations	537
Member Data	537
NamedPipeReader	538
Public Methods	538
Static Public Attributes	538
Constructors & Destructors	538
Member Functions	539
Member Data	540
NamedPipeWriter	541
Public Methods	541
Static Public Attributes	541
Constructors & Destructors	541
Member Functions	541
Member Data	543
Index	545

About This Guide

This Reference Guide provides indepth information on the blocks used in System Generator. In addition, information on System Generator Utilities and Programmatic Access is also provided.

Guide Contents

This Reference Guide contains the following topics:

- Xilinx Blockset
- Xilinx Reference Blockset
- XtremeDSP Kit
- System Generator Utilities
- Programmatic Access

System Generator PDF Doc Set

This Reference Guide can be found in the System Generator Help system and is also part of the System Generator Doc Set that is provided in PDF format. The content of the doc set is as follows:

- *System Generator for DSP Getting Started Guide*
- *System Generator for DSP User Guide*
- *System Generator for DSP Reference Guide*

Note: Hyperlinks across these PDF documents work only when the PDF files reside in the same folder. After clicking a Hyperlink in the Adobe Reader, you can return to the previous page by pressing the Alt key and the left arrow key (←) at the same time.

Additional Resources

To find additional documentation, see the Xilinx website at:

<http://www.xilinx.com/literature>.

To search the Answer Database of silicon, software, and IP questions and answers, or to create a technical support WebCase, see the Xilinx website at:

<http://www.xilinx.com/support>.

Conventions

This document uses the following conventions. An example illustrates each convention.

Typographical

The following typographical conventions are used in this document:

Convention	Meaning or Use	Example
Courier font	Messages, prompts, and program files that the system displays	speed grade: - 100
Courier bold	Literal commands that you enter in a syntactical statement	ngdbuild <i>design_name</i>
Helvetica bold	Commands that you select from a menu	File → Open
	Keyboard shortcuts	Ctrl+C
Italic font	Variables in a syntax statement for which you must supply values	ngdbuild <i>design_name</i>
	References to other manuals	See the <i>Development System Reference Guide</i> for more information.
	Emphasis in text	If a wire is drawn so that it overlaps the pin of a symbol, the two nets are <i>not</i> connected.
Square brackets []	An optional entry or parameter. However, in bus specifications, such as bus [7:0] , they are required.	ngdbuild [<i>option_name</i>] <i>design_name</i>
Braces { }	A list of items from which you must choose one or more	lowpwr = { on off }
Vertical bar	Separates items in a list of choices	lowpwr = { on off }
Vertical ellipsis . . .	Repetitive material that has been omitted	IOB #1: Name = QOUT' IOB #2: Name = CLKIN' . . .
Horizontal ellipsis ...	Repetitive material that has been omitted	allow block <i>block_name loc1 loc2 ... locn</i> ;

Online Document

The following conventions are used in this document:

Convention	Meaning or Use	Example
Blue text	Cross-reference link to a location in the current document	See the topic “ Additional Resources ” for details. Refer to “ Title Formats ” in Chapter 1 for details.
Red text	Cross-reference link to a location in another document	See Figure 2-5 in the <i>Virtex-II Platform FPGA User Guide</i> .
Blue, underlined text	Hyperlink to a website (URL)	Go to http://www.xilinx.com for the latest speed files.

Xilinx Blockset

[Organization of Blockset Libraries](#)

Describes how the Xilinx blocks are organized into libraries.

[Common Options in Block Parameters Dialog Boxes](#)

Describes block parameters that are common to most blocks in the Xilinx blockset.

[Block Reference Pages](#)

Alphabetical listing of the Xilinx blockset with detailed descriptions of each block.

[Xilinx LogiCORE Versions](#)

Lists the version numbers of the Xilinx LogiCORE™(s) used in the Xilinx Blockset.

Organization of Blockset Libraries

The Xilinx Blockset contains building blocks for constructing DSP and other digital systems in FPGAs using Simulink. The blocks are grouped into libraries according to their function, and some blocks with broad applicability (e.g., the Gateway I/O blocks) are linked into multiple libraries. The following libraries are provided:

Library	Description
Index	Includes every block in the Xilinx Blockset.
Basic Element Blocks	Includes standard building blocks for digital logic
Communication Blocks	Includes forward error correction and modulator blocks, commonly used in digital communications systems
Control Logic Blocks	Includes blocks for control circuitry and state machines
Data Type Blocks	Includes blocks that convert data types (includes gateways)
DSP Blocks	Includes Digital Signal Processing (DSP) blocks
Math Blocks	Includes blocks that implement mathematical functions
Memory Blocks	Includes blocks that implement and access memories
Shared Memory Blocks	Includes blocks that implement and access Xilinx shared memories
Tool Blocks	Includes “Utility” blocks, e.g., code generation (System Generator block), resource estimation, HDL co-simulation, etc

Basic Element Blocks

Table 1-1: Basic Element Blocks

Block	Description
Addressable Shift Register	The Xilinx Addressable Shift Register block is a variable-length shift register in which any register in the delay chain can be addressed and driven onto the output data port.
Assert	The Xilinx Assert block is used to assert a rate and/or a type on a signal. This block has no cost in hardware and can be used to resolve rates and/or types in situations where designer intervention is required.
BitBasher	The Xilinx BitBasher block performs slicing, concatenation and augmentation of inputs attached to the block.
Black Box	The System Generator Black Box block provides a way to incorporate hardware description language (HDL) models into System Generator.
Clock Enable Probe	The Xilinx Clock Enable (CE) Probe provides a mechanism for extracting derived clock enable signals from Xilinx signals in System Generator models.

Table 1-1: Basic Element Blocks

Block	Description
Concat	The Xilinx Concat block performs a concatenation of n bit vectors represented by unsigned integer numbers, i.e. n unsigned numbers with binary points at position zero.
Constant	The Xilinx Constant block generates a constant that can be a fixed-point value, a Boolean value, or a DSP48 instruction. This block is similar to the Simulink constant block, but can be used to directly drive the inputs on Xilinx blocks.
Convert	The Xilinx Convert block converts each input sample to a number of a desired arithmetic type. For example, a number can be converted to a signed (two's complement) or unsigned value.
Counter	The Xilinx Counter block implements a free running or count-limited type of an up, down, or up/down counter. The counter output can be specified as a signed or unsigned fixed-point number.
Delay	The Xilinx Delay block implements a fixed delay of L cycles.
Divider Generator 2.0	The Xilinx Divider Generator 2.0 block creates a circuit for integer division based on Radix-2 non-restoring division, or High-Radix division with prescaling.
Expression	The Xilinx Expression block performs a bitwise logical expression.
Gateway In	The Xilinx Gateway In blocks are the inputs into the Xilinx portion of your Simulink design. These blocks convert Simulink integer, double and fixed-point data types into the System Generator fixed-point type. Each block defines a top-level input port in the HDL design generated by System Generator.
Gateway Out	Xilinx Gateway Out blocks are the outputs from the Xilinx portion of your Simulink design. This block converts the System Generator fixed-point data type into Simulink Double.
Inverter	The Xilinx Inverter block calculates the bitwise logical complement of a fixed-point number. The block is implemented as a synthesizable VHDL module.
LFSR	The Xilinx LFSR block implements a Linear Feedback Shift Register (LFSR). This block supports both the Galois and Fibonacci structures using either the XOR or XNOR gate and allows a re-loadable input to change the current value of the register at any time. The LFSR output and re-loadable input can be configured as either serial or parallel ports
Logical	The Xilinx Logical block performs bitwise logical operations on 2, 3, or 4 fixed-point numbers. Operands are zero padded and sign extended as necessary to make binary point positions coincide; then the logical operation is performed and the result is delivered at the output port.
Mux	The Xilinx Mult block implements a multiplier. It computes the product of the data on its two input ports, producing the result on its output port.

Table 1-1: Basic Element Blocks

Block	Description
Parallel to Serial	The Parallel to Serial block takes an input word and splits it into N time-multiplexed output words where N is the ratio of number of input bits to output bits. The order of the output can be either least significant bit first or most significant bit first.
Register	The Xilinx Register block models a D flip flop-based register, having latency of one sample period.
Reinterpret	The Xilinx Reinterpret block forces its output to a new type without any regard for retaining the numerical value represented by the input.
Relational	The Xilinx Relational block implements a comparator.
Reset Generator	The Reset Generator block captures the user's reset signal that is running at the system sample rate, and produces one or more downsampled reset signal(s) running at the rates specified on the block.
Serial to Parallel	The Serial to Parallel block takes a series of inputs of any size and creates a single output of a specified multiple of that size. The input series can be ordered either with the most significant word first or the least significant word first.
Slice	The Xilinx Slice block allows you to slice off a sequence of bits from your input data and create a new data value. This value is presented as the output from the block. The output data type is unsigned with its binary point at zero.
System Generator	The System Generator block provides control of system and simulation parameters, and is used to invoke the code generator. Every Simulink model containing any element from the Xilinx Blockset must contain at least one System Generator block. Once a System Generator block is added to a model, it is possible to specify how code generation and simulation should be handled.
Time Division Demultiplexer	The Xilinx Time Division Demultiplexer block accepts input serially and presents it to multiple outputs at a slower rate.
Time Division Multiplexer	The Xilinx Time Division Multiplexer block multiplexes values presented at input ports into a single faster rate output stream.
Up Sample	The Xilinx Up Sample block increases the sample rate at the point where the block is placed in your design. The output sample period is $1/n$, where l is the input sample period and n is the sampling rate.

Communication Blocks

Table 1-2: Communication Blocks - FEC

Communication Block	Description
Convolutional Encoder v6_1	The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.
Depuncture	The Xilinx Depuncture block allows you to insert an arbitrary symbol into your input data at the location specified by the depuncture code.
Interleaver Deinterleaver v4_0	The Xilinx Interleaver/Deinterleaver block implements an interleaver or a deinterleaver. An interleaver is a device that rearranges the ordering of a sequence of symbols in a one-to-one deterministic manner. Associated with any interleaver is a deinterleaver, a device that restores the reordered sequence.
Interleaver Deinterleaver v5_0	The Xilinx Interleaver/Deinterleaver block implements an interleaver or a deinterleaver. An interleaver is a device that rearranges the ordering of a sequence of symbols in a one-to-one deterministic manner. Associated with any interleaver is a deinterleaver, a device that restores the reordered sequence.
Puncture	The Xilinx Puncture block removes a set of user-specified bits from the input words of its data stream.
Reed-Solomon Decoder 6.1	The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.
Reed-Solomon Encoder 6.1	The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.
Viterbi Decoder v6_1	Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.

Control Logic Blocks

Table 1-3: Control Logic Blocks

Control Logic Block	Description
Black Box	The System Generator Black Box block provides a way to incorporate hardware description language (HDL) models into System Generator.
Constant	The Xilinx Constant block generates a constant that can be a fixed-point value, a Boolean value, or a DSP48 instruction. This block is similar to the Simulink constant block, but can be used to directly drive the inputs on Xilinx blocks.

Table 1-3: Control Logic Blocks

Control Logic Block	Description
Counter	The Xilinx Counter block implements a free running or count-limited type of an up, down, or up/down counter. The counter output can be specified as a signed or unsigned fixed-point number.
Dual Port RAM	The Xilinx Dual Port RAM block implements a random access memory (RAM). Dual ports enable simultaneous access to the memory space at different sample rates using multiple data widths.
EDK Processor	The EDK Processor block allows user logic developed in System Generator to be attached to embedded processor systems created using the Xilinx Embedded Development Kit (EDK).
Expression	The Xilinx Expression block performs a bitwise logical expression.
FFT v4_1	The Xilinx FFT v4_1 block is supported for Virtex TM -5, Virtex-4, Virtex-II Pro, Spartan TM -3, Spartan-3E and Spartan-3A devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
Inverter	The Xilinx Inverter block calculates the bitwise logical complement of a fixed-point number. The block is implemented as a synthesizable VHDL module.
Logical	The Xilinx Logical block performs bitwise logical operations on 2, 3, or 4 fixed-point numbers. Operands are zero padded and sign extended as necessary to make binary point positions coincide; then the logical operation is performed and the result is delivered at the output port.
MCode	The Xilinx MCode block is a container for executing a user-supplied MATLAB function within Simulink. A parameter on the block specifies the M-function name. The block executes the M-code to calculate block outputs during a Simulink simulation. The same code is translated in a straightforward way into equivalent behavioral VHDL/Verilog when hardware is generated.
Mux	The Xilinx Mux block implements a multiplexer. The block has one select input (type unsigned) and a user-configurable number of data bus inputs, ranging from 2 to 1024.
PicoBlaze Microcontroller	The Xilinx PicoBlaze Microcontroller block implements an embedded 8-bit microcontroller using the PicoBlaze macro.
Register	The Xilinx Register block models a D flip flop-based register, having latency of one sample period.
Relational	The Xilinx Relational block implements a comparator.
ROM	The Xilinx ROM block is a single port read-only memory (ROM).
Shift	The Xilinx Shift block performs a left or right shift on the input signal. The result will have the same fixed-point container as that of the input.

Table 1-3: Control Logic Blocks

Control Logic Block	Description
Single Port RAM	The Xilinx Single Port RAM block implements a random access memory (RAM) with one data input and one data output port.
Slice	The Xilinx Slice block allows you to slice off a sequence of bits from your input data and create a new data value. This value is presented as the output from the block. The output data type is unsigned with its binary point at zero.

Data Type Blocks

Table 1-4: Data Type Blocks

Data Type Block	Description
Concat	The Xilinx Concat block performs a concatenation of n bit vectors represented by unsigned integer numbers, i.e. n unsigned numbers with binary points at position zero.
Convert	The Xilinx Convert block converts each input sample to a number of a desired arithmetic type. For example, a number can be converted to a signed (two's complement) or unsigned value.
Gateway In	The Xilinx Gateway In blocks are the inputs into the Xilinx portion of your Simulink design. These blocks convert Simulink integer, double and fixed-point data types into the System Generator fixed-point type. Each block defines a top-level input port in the HDL design generated by System Generator.
Gateway Out	Xilinx Gateway Out blocks are the outputs from the Xilinx portion of your Simulink design. This block converts the System Generator fixed-point data type into Simulink Double.
Parallel to Serial	The Parallel to Serial block takes an input word and splits it into N time-multiplexed output words where N is the ratio of number of input bits to output bits. The order of the output can be either least significant bit first or most significant bit first.
Reinterpret	The Xilinx Reinterpret block forces its output to a new type without any regard for retaining the numerical value represented by the input.
Scale	The Xilinx Scale block scales its input by a power of two. The power can be either positive or negative. The block has one input and one output. The scale operation has the effect of moving the binary point without changing the bits in the container
Serial to Parallel	The Serial to Parallel block takes a series of inputs of any size and creates a single output of a specified multiple of that size. The input series can be ordered either with the most significant word first or the least significant word first.

Table 1-4: Data Type Blocks

Data Type Block	Description
Shift	The Xilinx Shift block performs a left or right shift on the input signal. The result will have the same fixed-point container as that of the input.
Slice	The Xilinx Slice block allows you to slice off a sequence of bits from your input data and create a new data value. This value is presented as the output from the block. The output data type is unsigned with its binary point at zero.

DSP Blocks

Table 1-5: DSP Blocks

DSP Block	Description
CIC Compiler 1.1	The Xilinx CIC Compiler provides the ability to design and implement Cascaded Integrator-Comb (CIC) filters for a variety of Xilinx FPGA devices.
DAFIR v9_0	The Xilinx DAFIR filter block implements a distributed arithmetic finite-impulse response (FIR) digital filter, or a bank of identical FIR filters (multichannel mode).
DDS v5_0	The Xilinx DDS Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.
DSP48	The Xilinx DSP48 block is an efficient building block for DSP applications that use Xilinx Virtex™-4 devices. The DSP48 combines an 18-bit by 18-bit signed multiplier with a 48-bit adder and programmable mux to select the adder's input.
DSP48 Macro	The System Generator DSP48 Macro block provides a device independent abstraction of the blocks DSP48, DSP48A, and DSP48E. Using this block instead of using a technology-specific DSP slice helps makes the design more portable between Xilinx technologies.
Fast Fourier Transform 6.0	The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
FDATool	The Xilinx FDATool block provides an interface to the FDATool software available as part of the MATLAB Signal Processing Toolbox.
FFT v5_0	The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
From FIFO	The Xilinx FIR Compiler 4.0 block implements a MAC-based or Distributed- Arithmetic FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration. The MAC-based filter is implemented using cascaded DSP48/DSP48E/DSP48A when available as shown in the figure below.

Table 1-5: DSP Blocks

DSP Block	Description
From FIFO	The Xilinx From FIFO block implements the trailing half of a first-in-first-out memory queue.
LFSR	The Xilinx LFSR block implements a Linear Feedback Shift Register (LFSR). This block supports both the Galois and Fibonacci structures using either the XOR or XNOR gate and allows a re-loadable input to change the current value of the register at any time. The LFSR output and re-loadable input can be configured as either serial or parallel ports

Index Blocks

Table 1-6: Index Blocks

Index Block	Description
Accumulator	The Xilinx Accumulator block implements an adder or subtractor-based scaling accumulator.
Addressable Shift Register	The Xilinx Addressable Shift Register block is a variable-length shift register in which any register in the delay chain can be addressed and driven onto the output data port.
AddSub	The Xilinx AddSub block implements an adder/subtractor. The operation can be fixed (Addition or Subtraction) or changed dynamically under control of the sub mode signal.
Assert	The Xilinx Assert block is used to assert a rate and/or a type on a signal. This block has no cost in hardware and can be used to resolve rates and/or types in situations where designer intervention is required.
BitBasher	The Xilinx BitBasher block performs slicing, concatenation and augmentation of inputs attached to the block.
Black Box	The System Generator Black Box block provides a way to incorporate hardware description language (HDL) models into System Generator.
ChipScope	The Xilinx ChipScope™ block enables run-time debugging and verification of signals within an FPGA.
CIC Compiler 1.1	The Xilinx CIC Compiler provides the ability to design and implement Cascaded Integrator-Comb (CIC) filters for a variety of Xilinx FPGA devices.
Clock Enable Probe	The Xilinx Clock Enable (CE) Probe provides a mechanism for extracting derived clock enable signals from Xilinx signals in System Generator models.
Clock Probe	The Xilinx Clock Probe generates a double-precision representation of a clock signal with a period equal to the Simulink system period.
CMult	The Xilinx CMult block implements a gain operator, with output equal to the product of its input by a constant value. This value can be a MATLAB expression that evaluates to a constant.

Table 1-6: Index Blocks

Index Block	Description
Concat	The Xilinx Concat block performs a concatenation of n bit vectors represented by unsigned integer numbers, i.e. n unsigned numbers with binary points at position zero.
Configurable Subsystem Manager	The Xilinx Configurable Subsystem Manager extends Simulink's configurable subsystem capabilities to allow a subsystem configurations to be selected for hardware generation as well as for simulation.
Constant	The Xilinx Constant block generates a constant that can be a fixed-point value, a Boolean value, or a DSP48 instruction. This block is similar to the Simulink constant block, but can be used to directly drive the inputs on Xilinx blocks.
Convert	The Xilinx Convert block converts each input sample to a number of a desired arithmetic type. For example, a number can be converted to a signed (two's complement) or unsigned value.
Convolutional Encoder v3_0	The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.
Convolutional Encoder v6_0	The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.
Convolutional Encoder v6_1	The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.
Counter	The Xilinx Counter block implements a free running or count-limited type of an up, down, or up/down counter. The counter output can be specified as a signed or unsigned fixed-point number.
DAFIR v9_0	The Xilinx DAFIR filter block implements a distributed arithmetic finite-impulse response (FIR) digital filter, or a bank of identical FIR filters (multichannel mode).
DDS Compiler v1_1	The Xilinx DDS Compiler v1_1 Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.
DDS Compiler v2_0	The Xilinx DDS Compiler v2_0 block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.

Table 1-6: Index Blocks

Index Block	Description
DDS v4_0	The Xilinx DDS Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.
DDS v5_0	The Xilinx DDS Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.
Delay	The Xilinx Delay block implements a fixed delay of L cycles.
Depuncture	The Xilinx Depuncture block allows you to insert an arbitrary symbol into your input data at the location specified by the depuncture code.
Divider Generator 2.0	The Xilinx Divider Generator 2.0 block creates a circuit for integer division based on Radix-2 non-restoring division, or High-Radix division with prescaling.
DSP48	The Xilinx DSP48 block is an efficient building block for DSP applications that use Xilinx Virtex™-4 devices. The DSP48 combines an 18-bit by 18-bit signed multiplier with a 48-bit adder and programmable mux to select the adder's input.
DSP48 Macro	The System Generator DSP48 Macro block provides a device independent abstraction of the blocks DSP48, DSP48A, and DSP48E. Using this block instead of using a technology-specific DSP slice helps makes the design more portable between Xilinx technologies.
DSP48A	The Xilinx DSP48A block is an efficient building block for DSP applications that use Xilinx Spartan-3A DSP devices. For those familiar with the DSP48 and the DSP48E, the DSP48A is a 'light' version of primitive.
DSP48E	The Xilinx DSP48E block is an efficient building block for DSP applications that use Xilinx Virtex™-5 devices. The DSP48E combines an 18-bit by 25-bit signed multiplier with a 48-bit adder and programmable mux to select the adder's input.
Dual Port RAM	The Xilinx Dual Port RAM block implements a random access memory (RAM). Dual ports enable simultaneous access to the memory space at different sample rates using multiple data widths.
EDK Processor	The EDK Processor block allows user logic developed in System Generator to be attached to embedded processor systems created using the Xilinx Embedded Development Kit (EDK).
Expression	The Xilinx Expression block performs a bitwise logical expression.
Fast Fourier Transform 6.0	The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
FDATool	The Xilinx FDATool block provides an interface to the FDATool software available as part of the MATLAB Signal Processing Toolbox.

Table 1-6: Index Blocks

Index Block	Description
FFT v1_0	The Xilinx FFT v1_0 block is supported only for the Virtex™ device. For other device family support refer to the FFT v3_1 block. The Xilinx FFT Block computes the Discrete Fourier Transform (DFT) using the radix-4 Cooley-Tukey algorithm, explained below.
FFT v3_1	The Xilinx FFT v3_1 block is supported only for Virtex™-4, Virtex-II, Virtex-II Pro and Spartan™-3 devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
FFT v3_2	The Xilinx FFT v3_2 block is supported only for Virtex™-4, Virtex-II, Virtex-II Pro and Spartan™-3 devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
FFT v4_1	The Xilinx FFT v4_1 block is supported for Virtex™-5, Virtex-4, Virtex-II Pro, Spartan™-3, Spartan-3E and Spartan-3A devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
FFT v5_0	The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
FIFO	The Xilinx FIFO block implements a FIFO memory queue.
FIR Compiler v1_0	The Xilinx Fir Compiler v1_0 block implements a high speed MAC-based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.
FIR Compiler v2_0	The Xilinx Fir Compiler v2_0 block implements a high speed MAC based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.
FIR Compiler v3_0	The Xilinx Fir Compiler v3_0 block implements a high speed MAC based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.
FIR Compiler v3_1	The Xilinx Fir Compiler v3_1 block implements a high speed MAC based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.
FIR Compiler v3_2	The Xilinx Fir Compiler v3_2 block implements a high speed MAC-based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.
From FIFO	The Xilinx FIR Compiler 4.0 block implements a MAC-based or Distributed- Arithmetic FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration. The MAC-based filter is implemented using cascaded DSP48/DSP48E/DSP48A when available as shown in the figure below.
From FIFO	The Xilinx FIFO block implements a FIFO memory queue.
From Register	The Xilinx From Register block implements the trailing half of a D flip-flop based register. The physical register can be shared among two designs or two portions of the same design.

Table 1-6: Index Blocks

Index Block	Description
Gateway In	The Xilinx Gateway In blocks are the inputs into the Xilinx portion of your Simulink design. These blocks convert Simulink integer, double and fixed-point data types into the System Generator fixed-point type. Each block defines a top-level input port in the HDL design generated by System Generator.
Gateway Out	Xilinx Gateway Out blocks are the outputs from the Xilinx portion of your Simulink design. This block converts the System Generator fixed-point data type into Simulink Double.
Indeterminate Probe	The output of the Xilinx Indeterminate Probe indicates whether the input data is indeterminate (MATLAB value NaN). An indeterminate data value corresponds to a VHDL indeterminate logic data value of 'X'.
Interleaver Deinterleaver v4_0	The Xilinx Interleaver/Deinterleaver block implements an interleaver or a deinterleaver. An interleaver is a device that rearranges the ordering of a sequence of symbols in a one-to-one deterministic manner. Associated with any interleaver is a deinterleaver, a device that restores the reordered sequence.
Interleaver Deinterleaver v5_0	The Xilinx Interleaver/Deinterleaver block implements an interleaver or a deinterleaver. An interleaver is a device that rearranges the ordering of a sequence of symbols in a one-to-one deterministic manner. Associated with any interleaver is a deinterleaver, a device that restores the reordered sequence.
Inverter	The Xilinx Inverter block calculates the bitwise logical complement of a fixed-point number. The block is implemented as a synthesizable VHDL module.
JTAG Co-Simulation	The Xilinx JTAG Co-Simulation block allows you to perform hardware co-simulation using JTAG and a Parallel Cable IV or Platform USB. The JTAG hardware co-simulation interface takes advantage of the ubiquity of JTAG to extend System Generator's hardware in the simulation loop capability to numerous other FPGA platforms.
LFSR	The Xilinx LFSR block implements a Linear Feedback Shift Register (LFSR). This block supports both the Galois and Fibonacci structures using either the XOR or XNOR gate and allows a re-loadable input to change the current value of the register at any time. The LFSR output and re-loadable input can be configured as either serial or parallel ports
Logical	The Xilinx Logical block performs bitwise logical operations on 2, 3, or 4 fixed-point numbers. Operands are zero padded and sign extended as necessary to make binary point positions coincide; then the logical operation is performed and the result is delivered at the output port.

Table 1-6: Index Blocks

Index Block	Description
MCode	The Xilinx MCode block is a container for executing a user-supplied MATLAB function within Simulink. A parameter on the block specifies the M-function name. The block executes the M-code to calculate block outputs during a Simulink simulation. The same code is translated in a straightforward way into equivalent behavioral VHDL/Verilog when hardware is generated.
MicroBlaze Processor	This block is now obsolete. Please use the EDK Processor block instead.
ModelSim	The System Generator Black Box block provides a way to incorporate existing HDL files into a model. When the model is simulated, co-simulation can be used to allow black boxes to participate. The ModelSim HDL co-simulation block configures and controls co-simulation for one or several black boxes.
Mult	The Xilinx Mult block implements a multiplier. It computes the product of the data on its two input ports, producing the result on its output port.
Multiple Subsystem Generator	The Xilinx Multiple Subsystem Generator block wires two or more System Generator designs into a single top-level HDL component that incorporates multiple clock domains. This top-level component includes the logic associated with each System Generator design and additional logic to allow the designs to communicate with one another.
Mux	The Xilinx Mux block implements a multiplexer. The block has one select input (type unsigned) and a user-configurable number of data bus inputs, ranging from 2 to 1024.
Negate	The Xilinx Negate block computes the arithmetic negation (two's complement) of its input. The block can be implemented either as a Xilinx LogiCORE™ or as a synthesizable VHDL module.
Network-based Ethernet Co-Simulation	The Xilinx Network-based Ethernet Co-Simulation block provides an interface to perform hardware co-simulation through an Ethernet connection over the IPv4 network infrastructure.
Opmode	The Xilinx Opmode block generates a constant that is a DSP48 or DSP48E instruction. The instruction is an 11-bit value for the DSP48 or an 15-bit value for the DSP48E. The instruction consists of the opmode, carry-in, carry-in select and either the subtract or alumode bits (depending upon the selection of DSP48 or DSP48E).
Parallel to Serial	The Parallel to Serial block takes an input word and splits it into N time-multiplexed output words where N is the ratio of number of input bits to output bits. The order of the output can be either least significant bit first or most significant bit first.
Pause Simulation	The Xilinx Pause Simulation block pauses the simulation when the input is non-zero. The block accepts any Xilinx signal type as input.

Table 1-6: Index Blocks

Index Block	Description
PicoBlaze Instruction Display	The PicoBlaze Instruction Display block takes an encoded 18 bit PicoBlaze instruction and a 10 bit address and displays the decoded instruction and the program counter on the block icon. This feature is useful when debugging PicoBlaze designs and can be used in conjunction with the Single-Step Simulation block to step through each instruction.
PicoBlaze Microcontroller	The Xilinx PicoBlaze Microcontroller block implements an embedded 8-bit microcontroller using the PicoBlaze macro.
Point-to-point Ethernet Co-Simulation	The Xilinx Point-to-point Ethernet Co-Simulation block provides an interface to perform hardware co-simulation through a raw Ethernet connection.
Puncture	The Xilinx Puncture block removes a set of user-specified bits from the input words of its data stream.
Register	The Xilinx Register block models a D flip flop-based register, having latency of one sample period.
Reinterpret	The Xilinx Reinterpret block forces its output to a new type without any regard for retaining the numerical value represented by the input.
Relational	The Xilinx Relational block implements a comparator.
Reset Generator	The Reset Generator block captures the user's reset signal that is running at the system sample rate, and produces one or more downsampled reset signal(s) running at the rates specified on the block.
Resource Estimator	The Xilinx Resource Estimator block provides fast estimates of FPGA resources required to implement a System Generator subsystem or model.
ROM	The Xilinx ROM block is a single port read-only memory (ROM).
RS Decoder v5_1	The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.
RS Decoder v6_0	The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.
RS Encoder v5_0	The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.
RS Encoder v6_0	The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.
Sample Time	The Sample Time block reports the normalized sample period of its input. A signal's normalized sample period is not equivalent to its Simulink absolute sample period. In hardware, this block is implemented as a constant.

Table 1-6: Index Blocks

Index Block	Description
Scale	The Xilinx Scale block scales its input by a power of two. The power can be either positive or negative. The block has one input and one output. The scale operation has the effect of moving the binary point without changing the bits in the container
Serial to Parallel	The Serial to Parallel block takes a series of inputs of any size and creates a single output of a specified multiple of that size. The input series can be ordered either with the most significant word first or the least significant word first.
Shared Memory	The Xilinx Shared Memory block implements a random access memory (RAM) that can be shared among multiple designs or sections of a design.
Shared Memory Read	The Xilinx Shared Memory Read block provides a high-speed interface for reading data from a Xilinx shared memory object. Both FIFO and lockable shared memory objects are supported by the block.
Shared Memory Write	The Xilinx Shared Memory Write block provides a high-speed interface for writing data into a Xilinx shared memory object. Both FIFO and lockable shared memory objects are supported by the block.
Shift	The Xilinx Shift block performs a left or right shift on the input signal. The result will have the same fixed-point container as that of the input.
Simulation Multiplexer	The Simulation Multiplexer has been deprecated in System Generator.
SineCosine	The Xilinx SineCosine block computes $\sin(x)$ and/or $\cos(x)$. It stores a reference sinusoid in a read-only memory (ROM) whose depth is defined by the width of the block's single input port.
Single Port RAM	The Xilinx Single Port RAM block implements a random access memory (RAM) with one data input and one data output port.
Single-Step Simulation	The Xilinx Single-Step Simulation block pauses the simulation each clock cycle when in single-step mode.
Slice	The Xilinx Slice block allows you to slice off a sequence of bits from your input data and create a new data value. This value is presented as the output from the block. The output data type is unsigned with its binary point at zero.
System Generator	The System Generator block provides control of system and simulation parameters, and is used to invoke the code generator. Every Simulink model containing any element from the Xilinx Blockset must contain at least one System Generator block. Once a System Generator block is added to a model, it is possible to specify how code generation and simulation should be handled.
Threshold	The Xilinx Threshold block tests the sign of the input number. If the input number is negative, the output of the block is -1; otherwise, the output is 1. The output is a signed fixed-point integer that is 2 bits long. The block has one input and one output.

Table 1-6: Index Blocks

Index Block	Description
Time Division Demultiplexer	The Xilinx Time Division Demultiplexer block accepts input serially and presents it to multiple outputs at a slower rate.
Time Division Multiplexer	The Xilinx Time Division Multiplexer block multiplexes values presented at input ports into a single faster rate output stream.
To FIFO	The Xilinx To FIFO block implements the leading half of a first-in-first-out memory queue.
To Register	The Xilinx To Register block implements the leading half of a D flip-flop based register, having latency of one sample period. The register can be shared among multiple designs or sections of a design.
Toolbar	The Xilinx Toolbar block provides quick access to several useful utilities in System Generator. The Toolbar simplifies the use of the zoom feature in Simulink and adds new auto layout and route capabilities to Simulink models.
Up Sample	The Xilinx Up Sample block increases the sample rate at the point where the block is placed in your design. The output sample period is $1/n$, where l is the input sample period and n is the sampling rate.
Viterbi Decoder v5_0	Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.
Viterbi Decoder v6_0	Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.
Viterbi Decoder v6_1	Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.
WaveScope	The System Generator WaveScope block provides a powerful and easy-to-use waveform viewer for analyzing and debugging System Generator designs.

Math Blocks

Table 1-7: Math Blocks

Math Block	Description
Accumulator	The Xilinx Accumulator block implements an adder or subtractor-based scaling accumulator.
AddSub	The Xilinx AddSub block implements an adder/subtractor. The operation can be fixed (Addition or Subtraction) or changed dynamically under control of the sub mode signal.
CMult	The Xilinx CMult block implements a gain operator, with output equal to the product of its input by a constant value. This value can be a MATLAB expression that evaluates to a constant.

Table 1-7: Math Blocks

Math Block	Description
Constant	The Xilinx Constant block generates a constant that can be a fixed-point value, a Boolean value, or a DSP48 instruction. This block is similar to the Simulink constant block, but can be used to directly drive the inputs on Xilinx blocks.
Convert	The Xilinx Convert block converts each input sample to a number of a desired arithmetic type. For example, a number can be converted to a signed (two's complement) or unsigned value.
Counter	The Xilinx Counter block implements a free running or count-limited type of an up, down, or up/down counter. The counter output can be specified as a signed or unsigned fixed-point number.
Expression	The Xilinx Expression block performs a bitwise logical expression.
Inverter	The Xilinx Inverter block calculates the bitwise logical complement of a fixed-point number. The block is implemented as a synthesizable VHDL module.
Logical	The Xilinx Logical block performs bitwise logical operations on 2, 3, or 4 fixed-point numbers. Operands are zero padded and sign extended as necessary to make binary point positions coincide; then the logical operation is performed and the result is delivered at the output port.
MCode	The Xilinx MCode block is a container for executing a user-supplied MATLAB function within Simulink. A parameter on the block specifies the M-function name. The block executes the M-code to calculate block outputs during a Simulink simulation. The same code is translated in a straightforward way into equivalent behavioral VHDL/Verilog when hardware is generated.
Mult	The Xilinx Mult block implements a multiplier. It computes the product of the data on its two input ports, producing the result on its output port.
Negate	The Xilinx Negate block computes the arithmetic negation (two's complement) of its input. The block can be implemented either as a Xilinx LogiCORE™ or as a synthesizable VHDL module.
Reinterpret	The Xilinx Reinterpret block forces its output to a new type without any regard for retaining the numerical value represented by the input.
Relational	The Xilinx Relational block implements a comparator.
Scale	The Xilinx Scale block scales its input by a power of two. The power can be either positive or negative. The block has one input and one output. The scale operation has the effect of moving the binary point without changing the bits in the container
Shift	The Xilinx Shift block performs a left or right shift on the input signal. The result will have the same fixed-point container as that of the input.

Table 1-7: Math Blocks

Math Block	Description
SineCosine	The Xilinx SineCosine block computes $\sin(x)$ and / or $\cos(x)$. It stores a reference sinusoid in a read-only memory (ROM) whose depth is defined by the width of the block's single input port.
Threshold	The Xilinx Threshold block tests the sign of the input number. If the input number is negative, the output of the block is -1; otherwise, the output is 1. The output is a signed fixed-point integer that is 2 bits long. The block has one input and one output.

Memory Blocks

Table 1-8: Memory Blocks

Math Block	Description
Addressable Shift Register	The Xilinx Addressable Shift Register block is a variable-length shift register in which any register in the delay chain can be addressed and driven onto the output data port.
Delay	The Xilinx Delay block implements a fixed delay of L cycles.
Dual Port RAM	The Xilinx Dual Port RAM block implements a random access memory (RAM). Dual ports enable simultaneous access to the memory space at different sample rates using multiple data widths.
FFT v4_1	The Xilinx FFT v4_1 block is supported for Virtex™-5, Virtex-4, Virtex-II Pro, Spartan™-3, Spartan-3E and Spartan-3A devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).
LFSR	The Xilinx LFSR block implements a Linear Feedback Shift Register (LFSR). This block supports both the Galois and Fibonacci structures using either the XOR or XNOR gate and allows a re-loadable input to change the current value of the register at any time. The LFSR output and re-loadable input can be configured as either serial or parallel ports
Register	The Xilinx Register block models a D flip flop-based register, having latency of one sample period.
ROM	The Xilinx ROM block is a single port read-only memory (ROM).
Shared Memory	The Xilinx Shared Memory block implements a random access memory (RAM) that can be shared among multiple designs or sections of a design.
Single Port RAM	The Xilinx Single Port RAM block implements a random access memory (RAM) with one data input and one data output port.

Shared Memory Blocks

Table 1-9: Shared Memory Blocks

Shared Memory Block	Description
From FIFO	The Xilinx From FIFO block implements the trailing half of a first-in-first-out memory queue.
From Register	The Xilinx From Register block implements the trailing half of a D flip-flop based register. The physical register can be shared among two designs or two portions of the same design.
Multiple Subsystem Generator	The Xilinx Multiple Subsystem Generator block wires two or more System Generator designs into a single top-level HDL component that incorporates multiple clock domains. This top-level component includes the logic associated with each System Generator design and additional logic to allow the designs to communicate with one another.
Shared Memory	The Xilinx Shared Memory block implements a random access memory (RAM) that can be shared among multiple designs or sections of a design.
Shared Memory Read	The Xilinx Shared Memory Read block provides a high-speed interface for reading data from a Xilinx shared memory object. Both FIFO and lockable shared memory objects are supported by the block.
Shared Memory Write	The Xilinx Shared Memory Write block provides a high-speed interface for writing data into a Xilinx shared memory object. Both FIFO and lockable shared memory objects are supported by the block.
To FIFO	The Xilinx To FIFO block implements the leading half of a first-in-first-out memory queue.
To Register	The Xilinx To Register block implements the leading half of a D flip-flop based register, having latency of one sample period. The register can be shared among multiple designs or sections of a design.

Tool Blocks

Table 1-10: Tool Blocks

Tool Blocks	Description
ChipScope	The Xilinx ChipScope™ block enables run-time debugging and verification of signals within an FPGA.
Clock Probe	The Xilinx Clock Probe generates a double-precision representation of a clock signal with a period equal to the Simulink system period.
Configurable Subsystem Manager	The Xilinx Configurable Subsystem Manager extends Simulink's configurable subsystem capabilities to allow a subsystem configurations to be selected for hardware generation as well as for simulation.

Table 1-10: Tool Blocks

Tool Blocks	Description
FDATool	The Xilinx FDATool block provides an interface to the FDATool software available as part of the MATLAB Signal Processing Toolbox.
Indeterminate Probe	The output of the Xilinx Indeterminate Probe indicates whether the input data is indeterminate (MATLAB value NaN). An indeterminate data value corresponds to a VHDL indeterminate logic data value of 'X'.
ModelSim	The System Generator Black Box block provides a way to incorporate existing HDL files into a model. When the model is simulated, co-simulation can be used to allow black boxes to participate. The ModelSim HDL co-simulation block configures and controls co-simulation for one or several black boxes.
Pause Simulation	The Xilinx Pause Simulation block pauses the simulation when the input is non-zero. The block accepts any Xilinx signal type as input.
PicoBlaze Instruction Display	The PicoBlaze Instruction Display block takes an encoded 18 bit PicoBlaze instruction and a 10 bit address and displays the decoded instruction and the program counter on the block icon. This feature is useful when debugging PicoBlaze designs and can be used in conjunction with the Single-Step Simulation block to step through each instruction.
Resource Estimator	The Xilinx Resource Estimator block provides fast estimates of FPGA resources required to implement a System Generator subsystem or model.
Simulation Multiplexer	The Simulation Multiplexer has been deprecated in System Generator.
Single-Step Simulation	The Xilinx Single-Step Simulation block pauses the simulation each clock cycle when in single-step mode.
System Generator	The System Generator block provides control of system and simulation parameters, and is used to invoke the code generator. Every Simulink model containing any element from the Xilinx Blockset must contain at least one System Generator block. Once a System Generator block is added to a model, it is possible to specify how code generation and simulation should be handled.
Toolbar	The Xilinx Toolbar block provides quick access to several useful utilities in System Generator. The Toolbar simplifies the use of the zoom feature in Simulink and adds new auto layout and route capabilities to Simulink models.
WaveScope	The System Generator WaveScope block provides a powerful and easy-to-use waveform viewer for analyzing and debugging System Generator designs.

Common Options in Block Parameters Dialog Boxes

Each Xilinx block has several controls and configurable parameters, seen in its block parameters dialog box. This dialog box can be accessed by double-clicking on the block. Many of these parameters are specific to the block. Block-specific parameters are described in the documentation for the block.

The remaining controls and parameters are common to most blocks. These common controls and parameters are described below.

Each dialog box contains four buttons: **OK**, **Cancel**, **Help**, and **Apply**. **Apply** applies configuration changes to the block, leaving the box open on the screen. **Help** displays HTML help for the block. **Cancel** closes the box without saving changes. **OK** applies changes and closes the box.

Precision

The fundamental computational mode in the Xilinx blockset is arbitrary precision fixed-point arithmetic. Most blocks give you the option of choosing the precision, i.e. the number of bits and binary point position.

By default, the output of Xilinx blocks is *full* precision; that is, sufficient precision to represent the result without error. Most blocks have a *User-Defined* precision option that fixes the number of total and fractional bits

Arithmetic Type

In the **Type** field of the block parameters dialog box, you can choose unsigned or signed (two's complement) as the data type of the output signal.

Number of Bits

Fixed-point numbers are stored in data types characterized by their word size as specified by number of bits, binary point, and arithmetic type parameters. The maximum number of bits supported is 4096.

Binary Point

The binary point is the means by which fixed-point numbers are scaled. The binary point parameter indicates the number of bits to the right of the binary point (i.e., the size of the fraction) for the output port. The binary point position must be between zero and the specified number of bits.


Overflow and Quantization

When user-defined precision is selected, errors may result from overflow or quantization. Overflow errors occur when a value lies outside the representable range. Quantization errors occur when the number of fractional bits is insufficient to represent the fractional portion of a value.

The Xilinx fixed-point data type supports several options for user-defined precision. For overflow the options are to **Saturate** to the largest positive/smallest negative value, to **Wrap** (i.e., to discard bits to the left of the most significant representable bit), or to **Flag as error** (an overflow as a Simulink error) during simulation. **Flag as error** is a simulation only feature. The hardware generated is the same as when **Wrap** is selected.

For quantization, the options are to **Round** to the nearest representable value (or to the value furthest from zero if there are two equidistant nearest representable values), or to **Truncate** (i.e., to discard bits to the right of the least significant representable bit).

The following is an image showing the Quantization and Overflow options.

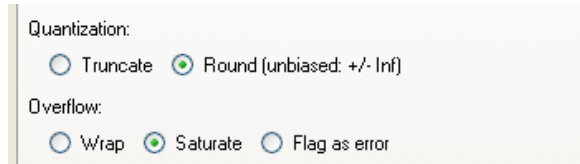

It is important to realize that whatever option is selected, the generated HDL model and Simulink model will behave identically.

Latency

Many elements in the Xilinx blockset have a latency option. This defines the number of sample periods by which the block's output is delayed. One sample period may correspond to multiple clock cycles in the corresponding FPGA implementation (for example, when the hardware is over-clocked with respect to the Simulink model). System Generator does not perform extensive pipelining; additional latency is usually implemented as a shift register on the output of the block.

Override with Doubles

Note: The "Override with Doubles" features as been disabled until further notice.

An *Override with Doubles* option appears on many Xilinx blocks. Most Simulink blocks use double precision floating point signals and arithmetic. However, when such a signal passes through Xilinx Gateway In block, it is converted to a fixed-point signal. Later, when passing through a Xilinx Gateway Out block, the signals are converted back into double precision floating point.

In the Simulink environment, the Override with Doubles option allows you to simulate the entire design in double precision floating point.

This option is useful in selecting fixed-point widths or when debugging. If you detect unacceptable quantization errors with fixed-point signals, you can choose to simulate your entire design, or only specific blocks, using double precision floating point signals and arithmetic operations. This option will help you discover which part of your design is responsible for the unacceptable quantization error.

You may choose Override with Doubles on a particular block. You may also choose this option for an entire sheet or an entire subsystem (the sheet plus underlying hierarchy) by instantiating a System Generator icon on the sheet, and choosing Override with Doubles as one of the System Generator block's configurable parameters.

When the output of one block with Override with Doubles set is connected to the input of another block where the option is also set, data samples are transmitted in double precision.

You can easily identify which blocks are currently set to Override with Doubles. When this option is set, affected Xilinx blocks are displayed in gray rather than the normal blue or yellow.

Provide Synchronous Reset Port

Selecting the **Provide Synchronous Reset Port** option activates an optional reset (`rst`) pin on the block.

When the reset signal is asserted the block goes back to its initial state. Reset signal has precedence over the optional enable signal available on the block. The reset signal has to run at a multiple of the block's sample rate. The signal driving the reset port must be Boolean.

Provide Enable Port

Selecting the **Provide Enable Port** option activates an optional enable (`en`) pin on the block. When the enable signal is not asserted the block holds its current state until the enable signal is asserted again or the reset signal is asserted. Reset signal has precedence over the enable signal. The enable signal has to run at a multiple of the block's sample rate. The signal driving the enable port must be Boolean.

Sample Period

Data streams are processed at a specific sample rate as they flow through Simulink. Typically, each block detects the input sample rate and produces the correct sample rate on its output. Xilinx blocks Up Sample and Down Sample provide a means to increase or decrease sample rates.

Specify Explicit Sample Period

If you select **Specify explicit sample period** rather than the default, you may set the sample period required for all the block outputs. This is useful when implementing features such as feedback loops in your design. In a feedback loop, it is not possible for System Generator to determine a default sample rate, because the loop makes an input sample rate depend on a yet-to-be-determined output sample rate. System Generator under these circumstances requires you to supply a hint to establish sample periods throughout a loop.

Use Behavioral HDL (otherwise use core)

When this checkbox is checked, the behavioral HDL generated by the M-code simulation is used instead of the structural HDL from the cores.

The M-code simulation creates the C simulation and this C simulation creates behavioral HDL. When this option is selected, it is this behavioral HDL that is used for further synthesis. When this option is not selected, the structural HDL generated from the cores and HDL templates (corresponding to each of the blocks in the model) is used instead for synthesis. Cores are generated for each block in a design once and cached for future netlisting. This capability ensures the fastest possible netlist generation while guaranteeing that the cores will be available for downstream synthesis and place and route tools.

Use Core Placement Information

If **Use Core Placement Information** is selected, the generated core includes relative placement information. This generally results in a faster implementation. Because the placement is constrained by this information, it can sometimes hinder the place and route software.

Placement

For the multiplier core, this option is presented if Use Core Placement Information is selected. This option allows specification of the layout shape in which the multiplier core will be placed in hardware. The **Rectangular** option will generate a rectangular placed core with loosely placed LUTs. **Triangular** packing will create a more compact shape with denser placement of LUTs.

FPGA Area (Slices, FFs, LUTs, IOBs, Embedded Mults, TBUFs) / Use Area Above For Estimation

These fields are used by the [Resource Estimator](#) block. The Resource Estimator gives you the ability to calculate the hardware resources needed for your System Generator design.

If you have placed a Resource Estimator in your design, you can use the **FPGA Area** field to manually enter the FPGA area utilization of a specific block. If you do not fill in these values, the Resource Estimator will calculate and fill in these values automatically.

If you wish to manually enter your own values for a specific block, then you must check the **Define FPGA area for resource estimation** box in order to force the Resource Estimator to use your entered values. Otherwise, the Resource Estimator will recalculate the FPGA Area and overwrite any values that you have entered into this field.

There are seven values available to enter into the FPGA Area field. You must enter or read each value in its correct position. If 'value=[1,2,3,4,5,6,7];' then:

- value(1) = Slices utilized by the block. An FPGA slice usually consists of two flip-flops, two LUTs and some associated mux, carry, and control logic.
- value(2) = Flip Flops utilized by the block.
- value(3) = Block RAM (BRAMs) utilized by the block.
- value(4) = LUTs utilized by the block.
- value(5) = IOBs consumed by the block.
- value(6) = Embedded (Emb.) multipliers utilized by the block. For example, the VirtexTM-II device contains embedded 18x18 multipliers.
- value(7) = Tristate Buffers (TBUFs) utilized by the block.

Only the Xilinx blocks that have a hardware cost (i.e., blocks that require physical hardware resources) will be considered by the Resource Estimator. The FPGA Area field is omitted from blocks with no associated hardware.


Although Slices are related to LUTs and Flops (Each Slice contains 1 LUT and 1 Flip Flop), they are entered separately since the number of packed slices will vary depending on the particular design.

Some Xilinx blocks do not support automatic resource estimation, as indicated in the Resource Estimator block documentation. The FPGA Area field for these blocks will not be updated automatically, and attempting to do so will cause a warning message to be displayed in the MATLAB console.

Block Reference Pages

Accumulator

This block is listed in the following Xilinx Blockset libraries: *Math and Index*.



The Xilinx Accumulator block implements an adder or subtractor-based scaling accumulator.

The block's current input is accumulated with a scaled current stored value. The scale factor is a block parameter.

Block Interface

The block has an input b and an output q . The output must have the same width as the input data. The output will have the same arithmetic type and binary point position as the input. The output q is calculated as follows:

$$q(n) = \begin{cases} 0 & \text{if } rst=1 \\ q(n-1) \times FeedbackScaling \pm b(n-1) & \text{otherwise} \end{cases}$$

A subtractor-based accumulator replaces addition of the current input $b(n)$ with subtraction.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Operation:** This determines whether the block is adder- or subtractor-based.
- **Feedback scaling:** specifies the feedback scale factor to be one of the following: 1, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, 1/128, or 1/256.
- **Reinitialize with input 'b' on reset:** when selected, the output of the accumulator is reset to the data on input port b . When not selected, the output of the accumulator is reset to zero. This option is available only when the block has a reset port. Using this option has clock speed implications if the accumulator is in a multirate system. In this case the accumulator is forced to run at the system rate since the clock enable (CE) signal driving the accumulator runs at the system rate and the reset to input operation is a function of the CE signal.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Use behavioral HDL (otherwise use core):** The block is implemented using behavioral HDL. This gives the downstream logic synthesis tool maximum freedom to optimize for performance or area.
- **Implement using:** Core logic can be implemented in **Fabric** or in a **DSP48**, if a DSP48 is available in the target device. The default is **Fabric**.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


The Accumulator block always has a latency of 1.

Xilinx LogiCORE

When the behavioral HDL option is not used, this block uses a Xilinx LogiCORE™.

Addressable Shift Register


This block is listed in the following Xilinx Blockset libraries: Basic Elements, Memory, and Index.



Addressable Shift Register

The Xilinx Addressable Shift Register block is a variable-length shift register in which any register in the delay chain can be addressed and driven onto the output data port.

The block operation is most easily thought of as a chain of registers, where each register output drives an input to a multiplexer, as shown below. The multiplexer select line is driven by the address port (`addr`). The output data port is shown below as `q`.

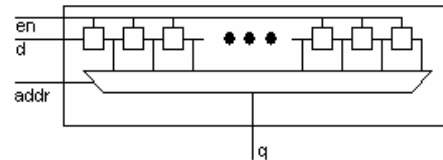

The Addressable Shift Register has a maximum depth of 1024 and a minimum depth of 2. The address input port, therefore, can be between 1 and 10 bits (inclusive). The data input port width must be between 1 and 255 bits (inclusive) when this block is implemented with the Xilinx LogiCORE™ (i.e. when **Use behavioral HDL (otherwise use core)** is unchecked).

In hardware, the address port is asynchronous relative to the output port. In the block S-function, the address port is therefore given priority over the input data port, i.e. on each successive cycle, the addressed data value is read from the register and driven to the output before the shift operation occurs. This order is needed in the Simulink software model to guarantee one clock cycle of latency between the data port and the first register of the delay chain. (If the shift operation were to come first, followed by the read, then there would be no delay, and the hardware would be incorrect.)

Block Interface

The block interface (inputs and outputs as seen on the Addressable Shift Register icon) are as follows:

Input Signals:

<code>d</code>	data input
<code>addr</code>	address
<code>en</code>	enable signal (optional)

Output Signals:

<code>q</code>	data output

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to this block are as follows:

- **Infer maximum latency (depth) using address port width:** you can choose to allow the block to automatically determine the depth or maximum latency of the shift-register-based on the bit-width of the address port.
- **Maximum latency (depth):** in the case that the maximum latency is not inferred (previous option), the maximum latency can be set explicitly.
- **Initial value vector:** specifies the initial register values. When the vector is longer than the shift register depth, the vector's trailing elements are discarded. When the shift register is deeper than the vector length, the shift register's trailing registers are initialized to zero.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Xilinx LogiCORE

When not using behavioral HDL, this block uses the Xilinx LogiCORE™ Ram-based Shift Register. The data input port width must be between 1 and 255 bits (inclusive) when using the LogiCORE.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Addressable Shift Register	RAM-based Shift Register	V7.0	•	•			•	•	•	
	RAM-based Shift Register	V9.1			•	•				•

AddSub

This block is listed in the following Xilinx Blockset libraries: *Math and Index*.



The Xilinx AddSub block implements an adder/subtractor. The operation can be fixed (Addition or Subtraction) or changed dynamically under control of the sub mode signal.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Operation:** Specifies the block operation to be Addition, Subtraction, or Addition/Subtraction. When Addition/Subtraction is selected, the block operation is determined by the sub input port, which must be driven by a Boolean signal. When the sub input is 1, the block performs subtraction. Otherwise, it performs addition.
- **Provide carry-in Port:** When selected, allows access to the carry-in port, `cin`. The carry-in port is available only when **User defined** precision is selected and the binary point of the inputs is set to zero.
- **Provide carry-out Port:** When selected, allows access to the carry-out port, `cout`. The carry-out port is available only when **User defined** precision is selected, the inputs and output are unsigned, and the number of output integer bits equals x , where $x = \max(\text{integer bits } a, \text{integer bits } b)$.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Use behavioral HDL (otherwise use core):** The block is implemented using behavioral HDL. This gives the downstream logic synthesis tool maximum freedom to optimize for performance or area.

Core Parameters

- **Pipeline for maximum performance:** The Xilinx LogiCORE™ can be internally pipelined to improve speed. Selecting this option ensures that the maximum usable latency will be used as internal core pipeline stages.
- **Implement using:** Core logic can be implemented in **Fabric** or in a **DSP48**, if a DSP48 is available in the target device. The default is **Fabric**.


Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

When not using behavioral HDL option, this block uses a Xilinx LogiCORE™.

Assert

This block is listed in the following Xilinx Blockset libraries: Index.



The Xilinx Assert block is used to assert a rate and/or a type on a signal. This block has no cost in hardware and can be used to resolve rates and/or types in situations where designer intervention is required.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this block are as follows:

- **Assert type:** specifies whether or not the block will assert that the type at its input is the same as the type specified. If the types are not the same, an error message is reported.
- **Specify type:** specifies whether or not the type to assert will be provided from a signal connected to an input port named `type` or whether it will be specified **Explicitly** from parameters in the Assert block dialog box.
- **Assert rate:** specifies whether or not the block will assert that the rate at its input is the same as the rate specified. If the rates are not the same, an error message is reported.
- **Specify rate:** specifies whether or not the initial rate to assert will be provided from a signal connected to an input port named `rate` or whether it will be specified **Explicitly** from the Sample rate parameter in the Assert block dialog box.
- **Provide output port:** specifies whether or not the block will feature an output port. The type and/or rate of the signal presented on the output port is the type and/or rate specified for assertion.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


The **Output type** parameter in this block uses the same description as the Arithmetic Type described in the topic [Common Options in Block Parameters Dialog Boxes](#).

The Assert block does not use a Xilinx LogiCORE™ and does not use resources when implemented in hardware.


Using the Assert block to Resolve Rates and Types

In cases where the simulation engine cannot resolve rates or types, the Assert block can be used to force a particular type or rate. In general this may be necessary when using components that use feedback and act as a signal source. For example, the circuit below requires an Assert block to force the rate and type of an SRL16. In this case, you can use an Assert block to 'seed' the rate which is then propagated back to the SRL16 input through the SRL16 and back to the Assert block. The design below fails with the following message when the Assert block is not used.

“The data types could not be established for the feedback paths through this block. You may need to add **Assert** blocks to instruct the system how to resolve types.

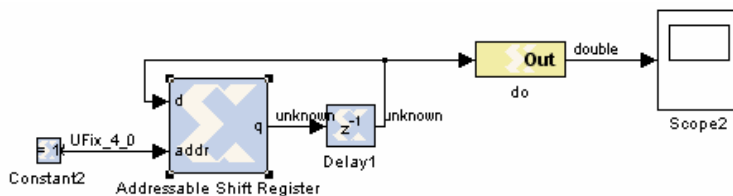

To resolve this error, an Assert block is introduced in the feedback path as shown below:

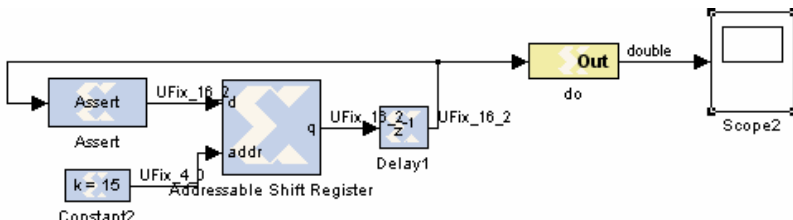


In the example, the Assert block is required to resolve the type, but the rate could have been determined by assigning a rate to the constant clock. The decision whether to use Constant blocks or Assert blocks to force rates is arbitrary and can be determined on a case by case basis.

System Generator 8.1 and later now resolves rates and types deterministically, however in some cases, the use of Assert blocks may be necessary for some System Generator components, even if they are resolvable. These blocks may include Black Box components and certain IP blocks.

BitBasher

This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Data Types and Index.*



The Xilinx BitBasher block performs slicing, concatenation and augmentation of inputs attached to the block.

The operation to be performed is described using Verilog syntax which will be detailed in this document. The block may have up to four output ports. The number of output ports is equal to the number of expressions. The block does not cost anything in hardware.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **BitBasher Expression:** Bitwise manipulation expression based on Verilog Syntax. Multiple expressions (limited to a maximum of 4) can be specified using new line as a separator between expressions.

Output Type tab

- **Output:** This refers to the port on which the data type is specified
- **Output type:** Arithmetic type to be forced onto the corresponding output
- **Binary Point:** Binary point location to be forced onto the corresponding output

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes.](#)

Supported Verilog Constructs

The BitBasher block only supports a subset of Verilog expression constructs that perform bitwise manipulations including slice, concatenation and repeat operators. All specified expressions must adhere to the following template expression:

```
output_var = {bitbasher_expr}
```

bitbasher_expr: A slice, concat or repeat expression based on Verilog syntax or simply an input port identifier.

output_var: The output port identifier. An output port with the name output_var will appear on the block and will hold the result of the wire expression bitbasher_expr

Concat

```
output_var = {bitbasher_expr1, bitbasher_expr2, bitbasher_expr3}
```

The concat syntax is supported as shown above. Each of bitbasher_exprN could either be an expression or simply an input port identifier.

The following are some examples of this construct:

```
a1 = {b, c, d, e, f, g}
a2 = {e}
```

```
a3 = {b, {f, c, d}, e}
```

Slice

```
output_var = {port_identifier[bound1:bound2]}...(1)
output_var = {port_identifier[bitN]}...(2)
```

port_identifier: The input port from which the bits are extracted.

bound1, bound2: Non-negative integers that lie between 0 and (bit-width of port_identifier – 1)

bitN: Non-negative integers that lie between 0 and (bit-width of port_identifier – 1)

As shown above, there are two schemes to extract bits from the input ports. If a range of consecutive bits need to be extracted, then the expression of the following form should be used.

```
output_var = {port_identifier[bound1:bound2]}...(1)
```

If only one bit is to be extracted, then the alternative form should be used.

```
output_var = {port_identifier[bitN]}...(2)
```

The following are some examples of this construct:

```
a1 = {b[7:3]}
```

a1 holds bits 7 through 3 of input b in the same order in which they appear in bit b (i.e. if b is 110110110 then a1 will be 10110).

```
a2 = {b[3:7]}
```

a2 holds bits 7 through 3 of input b in the reverse order in which they appear in bit b (i.e. if b is 110100110 then a2 will be 00101).

```
a3 = {b[5]}
```

a3 holds bit 5 of input b.

```
a4 = {b[7:5], c[3:9], {d, e}}
```

The above expression makes use of a combination of slice and concat constructs. Bits 7 through 5 of input b, bits 3 through 9 of input c and all the bits of d and e are concatenated.

Repeat

```
output_var = {N{bitbasher_expr}}
```

N: A positive integer that represents the repeat factor in the expression

The following are some examples of this construct:

```
a1 = {4{b[7:3]}}
```

The above expression is equivalent to a1 = {b[7:3], b[7:3], b[7:3], b[7:3]}

```
a2 = {b[7:3], 2{c, d}}
```

The above expression is equivalent to a2 = {b[7:3], c, d, c, d }

Constants

Binary Constant: N'bbin_const

Octal Constant: N'ooctal_const

Decimal Constant: N'doctal_const

Hexadecimal Constant: N'hoctal_const

N: A positive integer that represents the number of bits that will be used to represent the constant

bin_const: A legal binary number string made up of 0 and 1

octal_const: A legal octal number string made up of 0, 1, 2, 3, 4, 5, 6 and 7

decimal_const: A legal decimal number string made up of 0, 1, 2, 3, 4, 5, 6, 7, 8 and 9

hexadecimal_const: A legal binary number string made up of 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, a, b, c, d, e and f

A constant can only be used to augment expressions already derived from input ports. In other words, a BitBasher block cannot be used to simply source constant like the [Constant](#) block.

The following examples make use of this construct:

```
a1 = {4'b1100, e}
if e were 110110110 then a1 would be 1100110110110.

a1 = {4'hb, e}
if e were 110110110 then a1 would be 1101110110110.


a1 = {4'o10, e}
if e were 110110110 then a1 would be 1000110110110.
```

Limitations

- Does not support masked parameterization on the bitbasher expressions.
- An expression cannot contain only constants, that is, each expression must include at least one input port.

Black Box

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, and Index.



The System Generator Black Box block provides a way to incorporate hardware description language (HDL) models into System Generator.

The block is used to specify both the simulation behavior in Simulink and the implementation files to be used during code generation with System Generator. A black box's ports produce and consume the same sorts of signals as other System Generator blocks. When a black box is translated into hardware, the associated HDL entity is automatically incorporated and wired to other blocks in the resulting design.

The black box can be used to incorporate either VHDL or Verilog into a Simulink model. Black box HDL can be co-simulated with Simulink using the System Generator interface to either ISE™ Simulator or the ModelSim simulation software from Model Technology, Inc. You can find more information on this topic in the documentation for the [ModelSim](#) block and in the topic [HDL Co-Simulation](#).

In addition to incorporating HDL into a System Generator model, the black box can be used to define the implementation associated with an external simulation model (e.g., [Hardware Co-Simulation Blocks](#)). System Generator also includes several Black Box Examples that demonstrate the capabilities and use of the black box.

Requirements on HDL for Black Boxes

Every HDL component associated with a black box must adhere to the following System Generator requirements and conventions:

- The entity name must not collide with any entity name that is reserved by System Generator (e.g., `xfir`, `xlregister`).
- Bi-directional ports are supported in HDL black boxes; however they will not be displayed in the System Generator as ports, they will only appear in the generated HDL after netlisting. Please refer to the topic for more information.
- Top level ports should be ordered most significant bit down to least significant bit, as in `std_logic_vector(7 downto 0)`, and not `std_logic_vector(0 to 7)`.
- For Verilog black boxes, the module and port names must be lower case and follow standard VHDL naming conventions.
- Clock and clock enable ports must be named according to the conventions described below.
- Any port that is a clock or clock enable must be of type `std_logic`. (For Verilog black boxes, such ports must be non-vector inputs, e.g., `input clk`.)
- Clock and clock enable ports on a black box are not treated like other ports. When a black box is translated into hardware, System Generator drives the clock and clock enable ports with signals whose rates can be specified according to the block's configuration and the sample rates that drive it in Simulink.
- Falling-edge triggered output data cannot be used.

To understand how clocks work for black boxes, it helps to understand how System Generator handles [Timing and Clocking](#) in general. To produce multiple rates in hardware, System Generator uses a single clock along with multiple clock enables, one enable for each rate. The enables activate different portions of hardware at the appropriate times.

Each clock enable rate is related to a corresponding sample period in Simulink. Every System Generator block that requires a clock has at least one clock and clock enable port in its HDL counterpart. Blocks having multiple rates have additional clock and clock enable ports.


Clocks for black boxes work like those for other System Generator blocks. The black box HDL must have a separate clock and clock enable port for each associated sample rate in Simulink. Clock and clock enable ports in black box HDL should be expressed as follows:

- Clock and clock enables must appear as pairs (i.e., for every clock, there is a corresponding clock enable, and vice-versa). Although a black box may have more than one clock port, a single clock source is used to drive each clock port. Only the clock enable rates differ.
- Each clock name (respectively, clock enable name) must contain the substring `clk` (resp., `ce`).
- The name of a clock enable must be the same as that for the corresponding clock, but with `ce` substituted for `clk`. For example, if the clock is named `src_clk_1`, then the clock enable must be named `src_ce_1`.

Clock and clock enable ports are not visible on the black box block icon. A work around is required to make the top-level HDL clock enable port visible in System Generator; the work around is to add a separate enable port to the top-level HDL and AND this signal with the actual clock enable signal.

The Black Box Configuration Wizard

The Configuration Wizard is a tool that makes it easy to associate a Verilog or VHDL component to a black box. The wizard is invoked whenever a black box is added to a model. To use the wizard, copy the file that defines the HDL component for a black box into the directory that contains the model. When a new black box is added to a model, the Configuration Wizard opens automatically. An example is shown in the figure below.

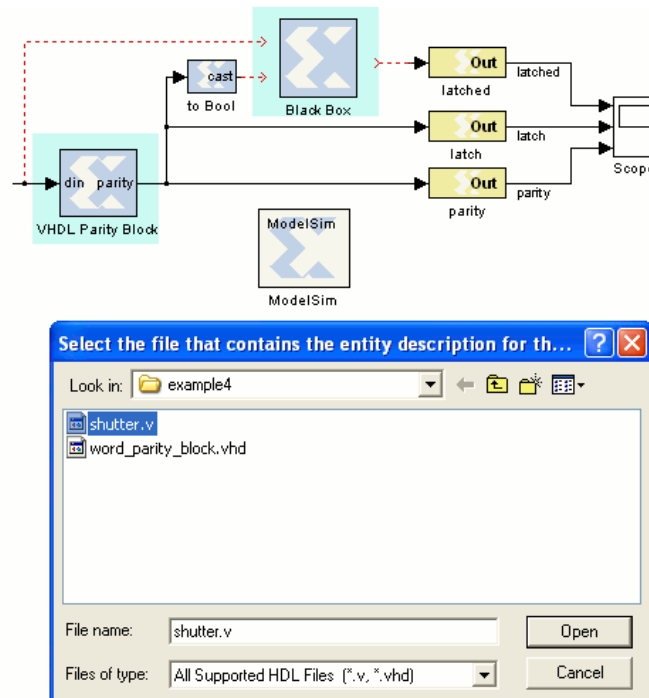

From this wizard choose the HDL file that should be associated to the black box, then press the **Open** button. The wizard generates a configuration M-function (described below) for the black box, and associates the function with the block. The configuration M-function produced by the wizard can usually be used without change, but occasionally the function must be tailored by hand. Whether the configuration M-function needs to be modified depends on how complex the HDL is.

The Black Box Configuration M-Function

A black box must describe its interface (e.g., ports and generics) and its implementation to System Generator. It does this through the definition of a MATLAB M-function (or p-function) called the block's configuration . The name of this function must be specified in the block parameter dialog box under the Block Configuration parameter.

The configuration M-function does the following:

- It specifies the top-level entity name of the HDL component that should be associated with the black box;
- It selects the language (i.e., VHDL or Verilog);
- It describes ports, including type, direction, bit width, binary point position, name, and sample rate. Ports can be static or dynamic. Static ports do not change; dynamic ports change in response to changes in the design. For example, a dynamic port might vary its width and type to suit the signal that drives it.
- It defines any necessary port type and data rate checking;
- It defines any generics required by the black box HDL;
- It specifies the black box HDL and other files (e.g., EDIF) that are associated with the block;
- It defines the clocks and clock enables for the block (see the following topic on clock conventions).
- It declares whether the HDL has any combinational feed-through paths.

System Generator provides an object-based interface for configuring black boxes consisting of two types of objects: SysgenBlockDescriptors, used to define entity characteristics, and SysgenPortDescriptors, used to define port characteristics. This interface is used to provide System Generator information in the configuration M-function for black box about the block's interface, simulation model, and implementation.

If the HDL for a black box has at least one combinational path (i.e., a direct feed-through from an input to an output port), the block must be tagged as combinational in its configuration M-function using the `tagAsCombinational` method. A black box can be a mixture (i.e., some paths can be combinational while others are not). **It is essential that a block containing a combinational path be tagged as such. Doing so allows System Generator to identify such blocks to the Simulink simulator. If this is not done, simulation results will be incorrect.**

The configuration M-function for a black box is invoked several times when a model is compiled. The function typically includes code that depends on the block's input ports. For example, sometimes it is necessary to set the data type and/or rate of an output port based on the attributes on an input port. It is sometimes also necessary to check the type and rate on an input port. At certain times when the function is invoked, Simulink may not yet know enough for such code to be executed.

To avoid the problems that arise when information is not yet known (in particular, exceptions), BlockDescriptor members *inputTypesKnown* and *inputRatesKnown* can be used.

These are used to determine if Simulink is able, at the moment, to provide information about the input port types and rates respectively. The following code illustrates this point.

```
if (this_block.inputTypesKnown)
% set dynamic output port types
% set generics that depend on input port types
% check types of input ports
end
```

If all input rates are known, this code sets types for dynamic output ports, sets generics that depend on input port types, and verifies input port types are appropriate. Avoid the mistake of including code in these conditional blocks (e.g., a variable definition) that is needed by code outside of the conditional block.

Note that the code shown above uses an object named `this_block`. Every black box configuration M-function automatically makes `this_block` available through an input argument. In MATLAB, `this_block` is the object that represents the black box, and is used inside the configuration M-function to test and configure the black box. Every `this_block` object is an instance of the *SysgenBlockDescriptor* MATLAB class. The methods that can be applied to `this_block` are specified in Appendix A. A good way to generate example configuration M-function is to run the Configuration Wizard (described below) on simple VHDL entities.

The [Black Box Examples](#) are an excellent way to become familiar with black box configuration options.

Sample Periods

The output ports, clocks, and clock enables on a black box must be assigned sample periods in the configuration M-function. If these periods are dynamic, or the black box needs to check rates, then the function must obtain the input port sample periods. Sample periods in the black box are expressed as integer multiples of the system rate as specified by the *Simulink System Period* field on the master System Generator block. For example, if the *Simulink System Period* is 1/8, and a black box input port runs at the system rate (i.e., at 1/8), then the configuration M-function sees 1 reported as the port's rate. Likewise, if the *Simulink System Period* is specified as pi, and an output port should run four times as fast as the system rate (i.e., at 4*pi), then the configuration M-function should set the rate on the output port to 4. The appropriate rate for constant ports is Inf.

As an example of how to set the output rate on each output port, consider the following code segment:

```
block.output(1).setRate(theInputRate);
block.output(2).setRate(theInputRate*5);
block.output(3).setRate(theInputRate*5);
```

The first line sets the first output port to the same rate as the input port. The next two lines set the output rate to 5 times the rate of the input.

Block Parameters


The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- Block Configuration M-Function:** Specifies the name of the configuration M-function that is associated to the black box. Ordinarily the file containing the function is stored in the directory containing the model, but it can be stored anywhere on the MATLAB path. Note that MATLAB limits all function names (including those for configuration M-functions) to 63 characters. Do not include the file extension (".m" or ".p") in the edit box.
- Simulation Mode:** Tells the mode (Inactive, ISE™ Simulator or External co-simulator) to use for simulation. When the mode is Inactive, the black box ignores all input data and writes zeroes to its output ports. Usually for this mode the black box should be coupled, using a Configurable Subsystem as described in the topic [Configurable Subsystems and System Generator](#).

System Generator uses Configurable Subsystems to allow two paths to be identified – one for producing simulation results, and the other for producing hardware. This approach gives the best simulation speed, but requires that a simulation model be constructed. When the mode is **ISE Simulator** or **External co-simulator**, simulation results for the black box are produced using co-simulation on the HDL associated with the black box. When the mode is **External co-simulator**, it is necessary to add a ModelSim HDL co-simulation block to the design, and to specify the name of the ModelSim block in the field labeled **HDL Co-Simulator To Use**. An example is shown below:

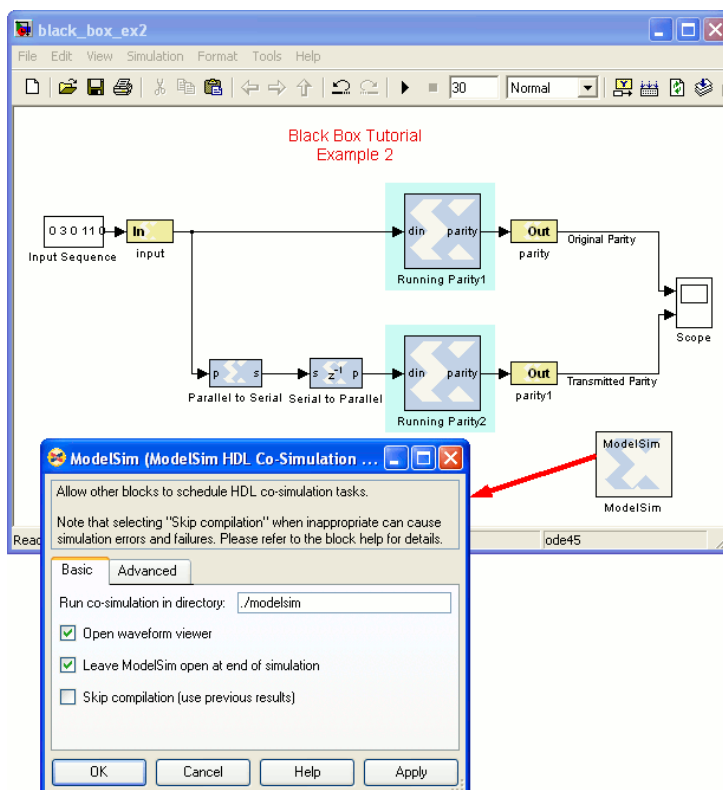

System Generator supports the ModelSim simulator from Mentor Graphics®, Inc. for HDL co-simulation. For co-simulation of Verilog black boxes, a mixed mode license is required. This is necessary because the portion of the design that System Generator writes is VHDL.

Usually the co-simulator block for a black box is stored in the same subsystem that contains the black box, but it is possible to store the block elsewhere. The path to a co-simulation block can be absolute, or can be relative to the subsystem containing the black box (e.g., "../ModelSim"). When simulating, each co-simulator block uses one license. To avoid running out of licenses, several black boxes can share the same co-simulation block. System Generator automatically generates and uses the additional VHDL needed to allow multiple blocks to be combined into a single ModelSim simulation.

Data Type Translation for HDL Co-Simulation

During co-simulation, ports in System Generator drive ports in the HDL simulator, and vice-versa. Types of signals in the tools are not identical, and must be translated. The rules used for translation are the following.

- A signal in System Generator can be Boolean, unsigned or signed fixed point. Fixed-point signals can have indeterminate values, but Boolean signals cannot. If the signal's value is indeterminate in System Generator, then all bits of the HDL signal become 'X', otherwise the bits become 0's and 1's that represent the signal's value.
- To bring HDL signals back into System Generator, standard logic types are translated into Booleans and fixed-point values as instructed by the black box configuration M-function. When there is a width mismatch, an error is reported. Indeterminate signals of all varieties (weak high, weak low, etc.) are translated to System Generator indeterminates. Any signal that is partially indeterminate in HDL simulation (e.g., a bit vector in which only the topmost bit is indeterminate) becomes entirely indeterminate in System Generator.
- HDL to System Generator translations can be tailored by adding a custom simulation-only top-level wrapper to the VHDL component. Such a wrapper might, for example, translate every weak low signal to 0 or every indeterminate signal to 0 or 1 before it is returned to System Generator.

An Example

The following is an example VHDL entity that can be associated to a System Generator black box. (This entity is taken from black box example [Importing a VHDL Module](#)).

```
library IEEE;
use IEEE.std_logic_1164.all;
use IEEE.numeric_std.all;
entity word_parity_block is
    generic (width : integer := 8);
    port (din : in std_logic_vector(width-1 downto 0);
          parity : out std_logic);
end word_parity_block;
architecture behavior of word_parity_block is
begin
    WORD_PARITY_Process : process (din)
        variable partial_parity : std_logic := '0';
    begin
        partial_parity := '0';
        XOR_BIT_LOOP: for N in din'range loop
            partial_parity := partial_parity xor din(N);
        end loop; -- N
        parity <= partial_parity after 1 ns ;
    end process WORD_PARITY_Process;
end behavior;
```

The following is an example configuration M-function. It makes the VHDL shown above available inside a System Generator black box.

```
function word_parity_block_config(this_block)
this_block.setTopLevelLanguage('VHDL');
    this_block.setEntityName('word_parity_block');
    this_block.tagAsCombinational;
    this_block.addSimulinkInport('din');
    this_block.addSimulinkOutport('parity');
    parity = this_block.port('parity');
    parity.setWidth(1);
    parity.useHDLVector(false);
    % -----
    if (this_block.inputTypesKnown)
        this_block.addGeneric('width',
            this_block.port('din').width);
    end % if(inputTypesKnown)
    % -----
    % -----
    if (this_block.inputRatesKnown)
        din = this_block.port('din');
        parity.setRate(din.rate);
    end % if(inputRatesKnown)
    % -----
    this_block.addFile('word_parity_block.vhd');
    return;
```

See Also

[Importing HDL Modules](#)

ChipScope

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The Xilinx ChipScope™ block enables run-time debugging and verification of signals within an FPGA.

Deep capture memory and multiple trigger options are provided. Data is captured based on user defined trigger conditions and stored in internal block memory.

The Xilinx ChipScope block can be accessed at run-time using the ChipScope Pro Analyzer software. The Analyzer is used to configure the FPGA, setup trigger conditions and view the captured data at run-time. All control and data transfer is done via the JTAG port, eliminating the need to drive data off-chip using I/O pins. Data can be exported from the Analyzer and read back into the MATLAB workspace.

Hardware and Software Requirements


The ChipScope™ Pro software (refer to [Software Prerequisites](#) topic to obtain information on software to be installed to use this block), a download cable and a FPGA board with a JTAG connector are required. More information about purchasing ChipScope Pro can be found at http://www.xilinx.com/ise/optional_prod/cspro.htm

The ChipScope Pro Analyzer supports the following download cables for communication between the PC and devices in the JTAG Boundary Scan chain:

- Parallel Cable III
- Parallel Cable IV
- MultiLINX (JTAG mode only)
- Agilent E5904B Option 500, FPGA Trace Port Analyzer (Agilent E5904B TPA).

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

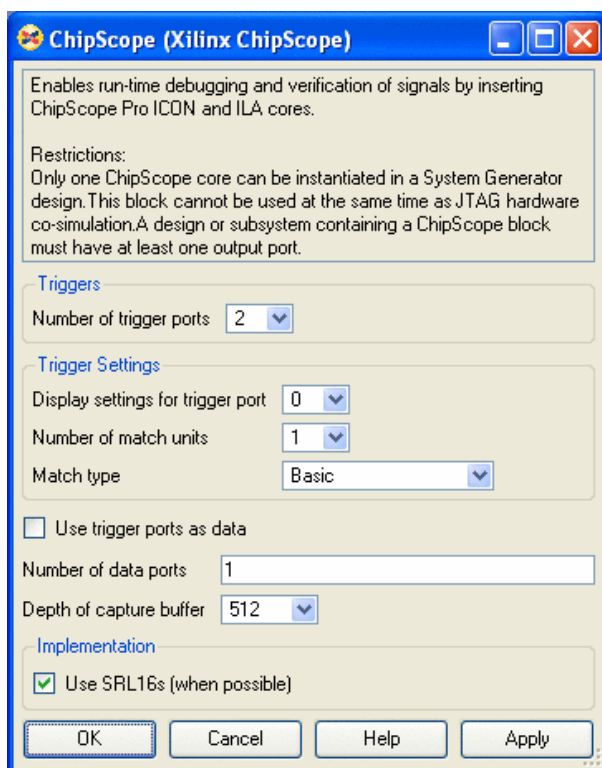

Parameters specific to this block are as follows:

- **Number of trigger ports:** Multiple trigger ports allow a larger range of events to be detected and can reduce the amount of data that is stored. Up to 16 Trigger Ports can be selected. Trigger Port-numbering starts from 0 and they are named Trig0, Trig1, ... TrigN-1 by default. The trigger port can be renamed by specifying a name on the signal that is connected to the port.
- **Display settings for trigger port:** For each trigger port, the number of match units and the match type need to be set. The pulldown menu displays settings for a particular trigger port. For N ports, the display options for trigger port 0 to N-1 can be shown.
- **Number of match units:** Using multiple match units per trigger port increases the flexibility of event detection. One to four match units can be used in conjunction to test for a trigger event. The trigger value is set at run-time in the ChipScope™ Pro Analyzer.
- **Match type:** This option can be set to one of the following six types:
 - a. **Basic:** performs = or <> comparisons
 - b. **Basic with edges:** in addition to the basic operations high/low, low/high transitions can also be detected
 - c. **Extended:** performs =, <>, >, <, <=, >= comparisons
 - d. **Extended with edges:** in addition to the extended operations, high/low, low/high transitions can also be detected.

- e. **Range:** performs =, <>, >, >=, <, <=, in range, not in range comparisons
- f. **Range with edges:** in addition to the range operations, high/low, low/high transitions can also be detected.

Note: The Basic match type is the most area efficient and can compare 8-bits per FPGA slice. The Basic With Edges match unit compares 4-bits per slice, Extended and Extended With Edges operates on 2-bits per slice and, Range and Range With Edges can compare 1-bit per slice.

- **Use trigger ports as data:** When this option is selected, the data and trigger ports are identical and are named trig0/data0, trig1/data1, ... trigN-1/dataN-1, where N is the number of trigger ports. This mode is very common in most logic analyzers, since it enables the data that is used to trigger the ChipScope block to be captured and collected. This mode conserves hardware resources by limiting the amount of data that is captured.

When this option is not selected the data ports are completely independent of the trigger ports. The trigger ports are named trig0, trig1, ... trigN-1, and the data ports are named data0, data1, ... dataN-1. The ports can be renamed by specifying a name on the signal that is connected to the port.

- **Number of data ports:** Up to 256 bits of data can be captured per sample. This implies that the number of Data Ports multiplied by the number of bits-per-port should be less than or equal to 256. System Generator propagates the data width automatically; therefore only the number of data ports need to be specified.
- **Depth of capture buffer:** The depth of the capture buffer is a power of 2, up to 16384 samples for Virtex™-II, Virtex-II Pro, and Spartan™-3 device families, and 4096 for Virtex, Virtex-E, Spartan-II and Spartan-IIE device families.

ChipScope Project File

System Generator creates a project file for ChipScope™ Pro in order to group data signals connected to the block into buses. A bus is created for each data port so that it can be viewed as an analog waveform by using the Bus Plot feature in the ChipScope Pro Analyzer. Each data bus is scaled based on the binary point used in Simulink model. If the signals connected to the ChipScope block are named, these names will be used in the ChipScope project file to name the buses.

A project can be loaded into the ChipScope Analyzer by selecting the **File > Import > Select New File** menu option and by choosing the ChipScope project file associated with the design. The project is saved as <block name>.cdc. <block name> is derived from the name of the Chipscope block in the design being compiled in the model's target directory.

Importing Data Into MATLAB Workspace From ChipScope

To export data from the ChipScope™ Pro Analyzer, first select the buses in the Bus Plot window that are to be exported. Then select the **File > Export option**, select the ASCII format and choose 'Bus Plot Buses' to export. Press the **Export** button and save the file with a .prn extension. Within MATLAB, change the current working directory to the location where the .prn file has been saved and type:

```
xlLoadChipScopeData('<your file name>.prn');
```

This loads the data from the .prn file into the MATLAB workspace. The names of the new workspace variables are the ports names of the ChipScope™ block. If the signals connected to the ChipScope block are named, these names are used to create the MATLAB workspace variables. If signal names are not specified the port names will depend on the Use Trigger

Ports as Data option. If this option is selected, the default the workspace variables will be named trig0_data0, trig1_data1, ... trigN-1_dataN-1. If the option is not selected, by default the names of the variables are data0 and data1, ... dataN.

Known Issues

- Refer to [Software Prerequisites](#) topic to obtain information on software to be installed to use this block
- Only one ChipScope™ core can be instantiated in a System Generator design. Simulink Goto and From blocks can be used to easily route signals to the ChipScope block.
- The ChipScope block cannot be used at the same time as JTAG Hardware Co-Simulation since both use the JTAG port.
- A design or subsystem containing a ChipScope block must have at least one output port. If an output port does not exist, the ChipScope block will be optimized away during VHDL synthesis.


More Information

Please refer to the following web page for further details on the ChipScope™ Pro software: <http://www.xilinx.com/chipscope>.

For a step-by-step tutorial on how to use this block, please refer to the topic [Using ChipScope Pro Analyzer for Real-Time Hardware Debugging](#).

CIC Compiler 1.1

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The Xilinx CIC Compiler provides the ability to design and implement Cascaded Integrator-Comb (CIC) filters for a variety of Xilinx FPGA devices.

CIC filters, also known as Hogenauer filters, are multi-rate filters often used for implementing large sample rate changes in digital systems. They are typically employed in applications that have a large excess sample rate. That is, the system sample rate is much larger than the bandwidth occupied by the processed signal as in digital down converters (DDCs) and digital up converters (DUCs). Implementations of

CIC filters have structures that use only adders, subtractors, and delay elements. These structures make CIC filters appealing for their hardware-efficient implementations of multi-rate filtering.

Block Parameters Dialog Box

Basic tab

Parameters specific to the Basic tab are:

Filter Specification

- **Filter type:** The CIC core supports both interpolation and decimation architectures. When the filter type is selected as decimator the input sample stream is down-sampled by the factor R . When an interpolator is selected the input sample is up-sampled by R .
- **Number of Stages:** Number of integrator and comb stages. If N stages are specified, there will be N integrators and N comb stages in the filter. The valid range for this parameter is 3 to 6.
- **Differential delay:** Number of unit delays employed in each comb filter in the comb section of either a decimator or interpolator. The valid range of this parameter is 1 or 2.
- **Number of channels:** Number of channels to support in implementation. The valid range of this parameter is 1 to 16.

Sample Rate Change

- **Sample rate changes:** Option to select between Fixed or Programmable.
- **Fixed or initial rate(ir):** Specifies initial or fixed sample rate change value for the CIC. The valid range for this parameter is 4 to 8192.
- **Minimum rate (Range: 4..ir):** The minimum rate change value for programmable rate change. The valid range for this parameter is 4 to fixed rate (ir).
- **Maximum rate (Range: ir..8192):** The maximum rate change value for programmable rate change. The valid range for this parameter is fixed rate (ir) to 8192.

Precision

- **Input data width:** May be specified from 2 bits to 20 bits.
- **Output data width:** May be specified up to 48 bits.

Optional Ports

- **CE:** Clock Enable – Core clock enable (active High). When this signal is active, the filter processes input data normally. When this signal is inactive, the filter stops processing data maintaining its state.
- **SCLR:** Synchronous Clear – Synchronous reset (active High). Asserting SCLR synchronously with CLK resets the filter internal state.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Implementation tab

- **Use Xtreme DSP slice:** This field specifies that if possible, use the XtremeDSP Slice (DSP48) on Virtex™-4, the XtremeDSP Slice (DSP48E) on Virtex-5, or the XtremeDSP Slice (DSP48A) on the Spartan™-3A DSP.


Xilinx LogiCORE

The block uses the following Xilinx LogiCORE™ Convolution Encoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
CIC Compiler 1.1	CIC Compiler v1.1	V1.1		•	•	•		•	•	•

CIC Compiler 1.2

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The Xilinx CIC Compiler provides the ability to design and implement Cascaded Integrator-Comb (CIC) filters for a variety of Xilinx FPGA devices.

CIC filters, also known as Hogenauer filters, are multi-rate filters often used for implementing large sample rate changes in digital systems. They are typically employed in applications that have a large excess sample rate. That is, the system sample rate is much larger than the bandwidth occupied by the processed signal as in digital down converters (DDCs) and digital up converters (DUCs). Implementations of

CIC filters have structures that use only adders, subtractors, and delay elements. These structures make CIC filters appealing for their hardware-efficient implementations of multi-rate filtering.

Block Parameters Dialog Box

Basic tab

Parameters specific to the Basic tab are:

Filter Specification

- **Filter type:** The CIC core supports both interpolation and decimation architectures. When the filter type is selected as decimator the input sample stream is down-sampled by the factor R . When an interpolator is selected the input sample is up-sampled by R .
- **Number of Stages:** Number of integrator and comb stages. If N stages are specified, there will be N integrators and N comb stages in the filter. The valid range for this parameter is 3 to 6.
- **Differential delay:** Number of unit delays employed in each comb filter in the comb section of either a decimator or interpolator. The valid range of this parameter is 1 or 2.
- **Number of channels:** Number of channels to support in implementation. The valid range of this parameter is 1 to 16.

Precision

- **Input data width:** May be specified from 2 bits to 20 bits.
- **Output data width:** May be specified up to 48 bits.

Sample Rate Change

- **Sample rate changes:** Option to select between Fixed or Programmable.
- **Fixed or initial rate(ir):** Specifies initial or fixed sample rate change value for the CIC. The valid range for this parameter is 4 to 8192.
- **Minimum rate (Range: 4..ir):** The minimum rate change value for programmable rate change. The valid range for this parameter is 4 to fixed rate (ir).
- **Maximum rate (Range: ir..8192):** The maximum rate change value for programmable rate change. The valid range for this parameter is fixed rate (ir) to 8192.

Optional Ports

- **CE:** Clock Enable – Core clock enable (active High). When this signal is active, the filter processes input data normally. When this signal is inactive, the filter stops processing data maintaining its state.
- **SCLR:** Synchronous Clear – Synchronous reset (active High). Asserting SCLR synchronously with CLK resets the filter internal state.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Implementation tab

- **Use Xtreme DSP slice:** This field specifies that if possible, use the XtremeDSP Slice (DSP48) on Virtex™-4, the XtremeDSP Slice (DSP48E) on Virtex-5, or the XtremeDSP Slice (DSP48A) on the Spartan™-3A DSP.

Note: If you are interfacing to this block, it is important to strictly adhere to the guidelines that are outlined in the section titled Interface, Control, and Timing in the CIC Compiler v1.2 LogiCORE™ Product Specification.


Xilinx LogiCORE

The block uses the following Xilinx LogiCORE™ Convolution Encoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
CIC Compiler 1.2	CIC Compiler v1.2	V1.2		•	•	•		•	•	•

Clock Enable Probe


This block is listed in the following Xilinx Blockset libraries: Basic Elements and Index.




The Xilinx Clock Enable (CE) Probe provides a mechanism for extracting derived clock enable signals from Xilinx signals in System Generator models.

The probe accepts any Xilinx signal type as input, and produces a Boolean output signal. The Boolean output can be used at any point in the design where Booleans are acceptable. The probe output is a cyclical pulse that mimics the behavior of an ideal clock enable signal used in the hardware implementation of a multirate circuit. The frequency of the pulse is derived from the input signal's sample period. The enable pulse is asserted at the end of the input signal's sample period for the duration of one Simulink system period. For signals with a sample period equal to the Simulink system period, the block's output is always one.

Shown below is an example model with an attached analysis scope that demonstrates the usage and behavior of the Clock Enable Probe. The Simulink system sample period for the model is specified in the System Generator block as 1.0 seconds. In addition to the Simulink system period, the model has three other sample periods defined by the Down Sample blocks. Clock Enable Probes are placed after each Down Sample block and extract the derived clock enable signal. The probe outputs are run to output gateways and then to the scope for analysis. Also included in the model is CLK probe that produces a Double representation of the hardware system clock. The scope output shows the output from the four Clock Enable probes in addition to the CLK probe output.

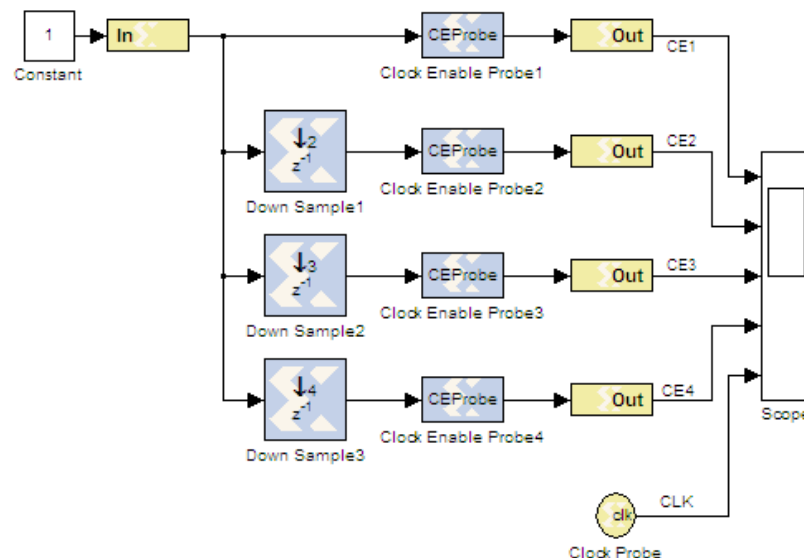

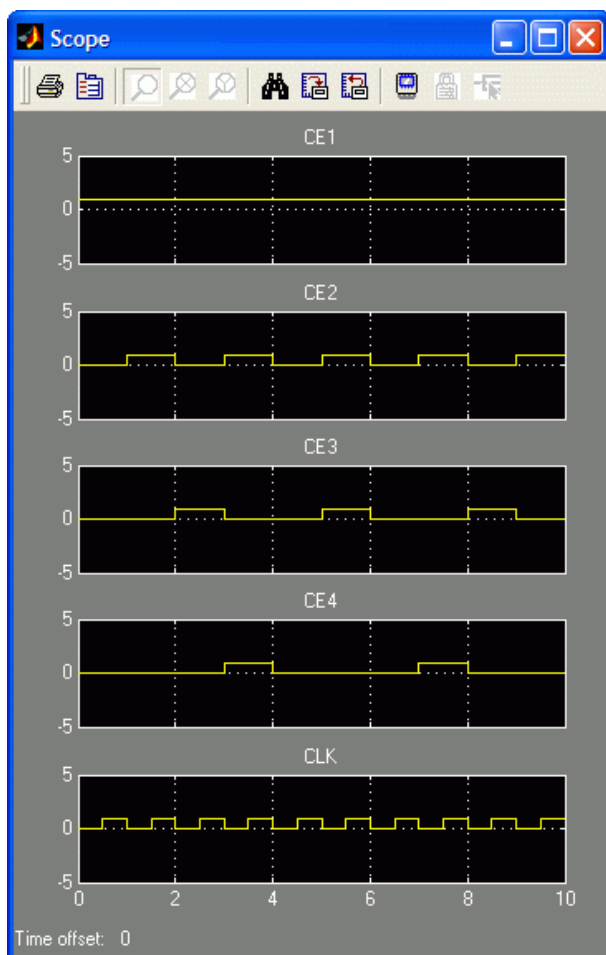

The Clock Enable block has no parameters.

Clock Probe

This block is listed in the following Xilinx Blockset libraries: Tools and Index.




The Xilinx Clock Probe generates a double-precision representation of a clock signal with a period equal to the Simulink system period.

The output clock signal has a 50/50 duty cycle with the clock asserted at the start of the Simulink sample period. The Clock Probe's double output is useful only for analysis, and cannot be translated into hardware.

There are no parameters for this block.

CMult


This block is listed in the following Xilinx Blockset libraries: *Math and Index*.



The Xilinx CMult block implements a *gain* operator, with output equal to the product of its input by a constant value. This value can be a MATLAB expression that evaluates to a constant.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

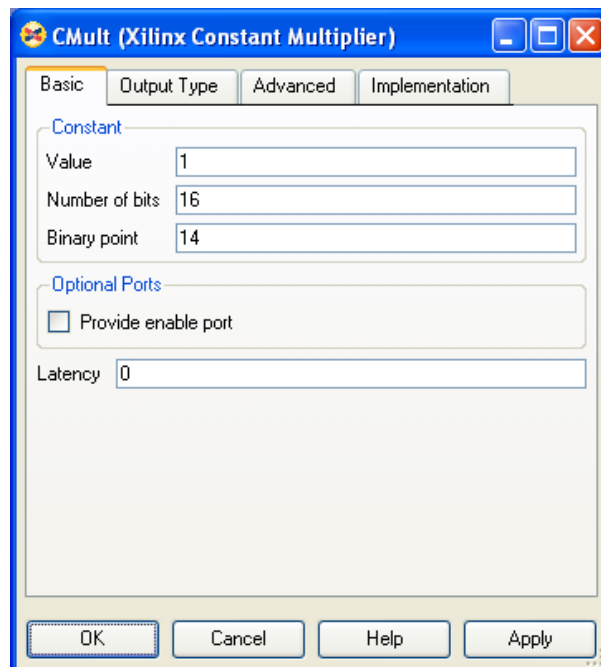

Basic tab

Parameters specific to the Basic Tab are as follows:

- **Constant value:** may be a constant or an expression. If the constant cannot be expressed exactly in the specified fixed-point type, its value is rounded and saturated as needed. A positive value is implemented as an unsigned number, a negative value as signed.
- **Constant Number of bits:** specifies the bit location of the binary point of the constant, where bit zero is the least significant bit.
- **Constant Binary point:** position of the binary point.

Output Type tab

The parameters on the Output Type tab define the precision of the output of the CMult block. These parameters are described in the topic [Common Options in Block Parameters Dialog Boxes](#).

Implementation tab

Parameters specific to the Implementation tab are:

- **Implement from behavioral HDL description (otherwise use core):** when selected, System Generator uses behavioral HDL, otherwise it uses the Xilinx LogiCORE™ Multiplier Generator.

Note: When this option is not selected (false) Sysgen Generator internally uses the behavioral HDL model for simulation if any of the following conditions are true:

- The constant value is 0 (or is truncated to 0).
- The constant value is less than 0 and its bit width is 1.
- The bit width of the constant or the input is less than 1 or is greater than 64.
- The bit width of the input data is 1 and its data type is xlFix.

This is true for all Virtex™ and Spartan™ device families.

- **Memory Type:** specifies whether to use distributed RAM or block RAM.
- **Placement style:** when using core placement information, two shape options are available. Rectangular creates a roughly rectangular design. Triangular creates a more densely packed design.
- **Pipeline for maximum performance:** when checked, directs System Generator to pipeline the LogiCORE implementation to the fullest extent possible.

Other parameters used by this block are explained in the topic

[Common Options in Block Parameters Dialog Boxes.](#)


Xilinx LogiCORE

When requested, this block uses the Xilinx LogiCORE™ Multiplier Generator.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
CMult	Multiplier	V7.0	•	•			•	•	•	
	Multiplier	V10.1			•	•				•

Concat

This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Data Types, and Index.*



The Xilinx Concat block performs a concatenation of n bit vectors represented by unsigned integer numbers, i.e. n unsigned numbers with binary points at position zero.

The Xilinx [Reinterpret](#) block provides capabilities that can extend the functionality of the Concat block.

Block Interface

The block has n input ports, where n is some value between 2 and 1024, inclusively, and one output port. The first and last input ports are labeled `hi` and `lo`, respectively. Input ports between these two ports are not labeled. The input to the `hi` port will occupy the most significant bits of the output and the input to the `lo` port will occupy the least significant bits of the output.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this block are as follows:

- **Number of Inputs:** specifies number of inputs, between 2 and 1024, inclusively, to concatenate together.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

The Concat block does not use a Xilinx LogiCORE™.

Configurable Subsystem Manager

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The Xilinx Configurable Subsystem Manager extends Simulink's configurable subsystem capabilities to allow a subsystem configurations to be selected for hardware generation as well as for simulation.

This block can be used to create Simulink library blocks (subsystems) that have special capabilities when used with the System Generator software. For details on how configurable subsystems, refer to the topic [Configurable Subsystems and System Generator](#).

System Generator will automatically insert Configurable Subsystem Manager blocks into library subsystems that it generates through its "Import as Configurable Subsystem" capability. It is also possible to hand-build library subsystems that take advantage of the Simulink and System Generator configurable subsystem capabilities.

Recall that a configurable subsystem consists of a collection of sub-blocks, exactly one of which "represents" the subsystem at any given time. (The so-called "block choice" for the subsystem specifies which sub-block should be the representative.) The representative is the sub-block used to produce results for the subsystem when simulating.

System Generator designs can be simulated, but can also be translated into hardware, and it is often useful to identify a second block to be used as a configurable subsystem's "hardware representative". The hardware representative is the sub-block used to translating the configurable subsystem into hardware. For example, suppose a configurable subsystem consists of two sub-blocks, namely a black box whose HDL implements a filter, and a subsystem that implements the same filter using ordinary System Generator blocks. Then it is natural to use the subsystem as the representative and the black box as the hardware representative, i.e., to use the subsystem in simulations, and the black box HDL to generate hardware.


The configurable subsystem manager specifies which sub-block in a System Generator configurable subsystem should be the hardware representative. To specify the hardware representative, do the following: 1) Place a manager inside one of the sub-blocks, and 2) Use the manager's **When generating, use** parameter to select the hardware representative.

Note: It is only possible to use a configurable subsystem manager by placing it inside a sub-block of a configurable subsystem. This means that at least one sub-block must be a subsystem.


Note: When several sub-blocks contain managers, the managers automatically synchronize so they agree on the choice of hardware representative.

Block Parameters

The dialog box for a configurable subsystem manager is shown below:

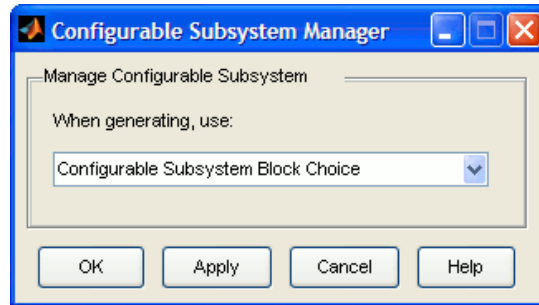

This block has one parameter, labeled **When generating, use**. The parameter specifies which sub-block to use as the hardware representative. An example list of choices is shown below.

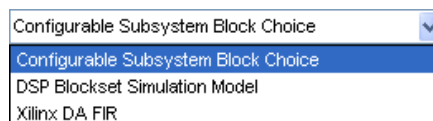

When **Configurable Subsystem Block Choice** is selected, the sub-block specified as the representative for the configurable subsystem is also used for generating hardware. Otherwise, the sub-block selected from the list is used as the hardware representative.

Constant


This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Math, and Index.



The Xilinx Constant block generates a constant that can be a fixed-point value, a Boolean value, or a DSP48 instruction. This block is similar to the Simulink constant block, but can be used to directly drive the inputs on Xilinx blocks.

DSP48 Instruction Mode

The constant block, when set to create a DSP48 instruction, is useful for generating DSP48 control sequences. The figure below shows an example. The example implements a 35x35-bit multiplier using a sequence of four instructions in a DSP48 block. The constant blocks supply the desired instructions to a multiplexer that selects each instruction in the desired sequence.

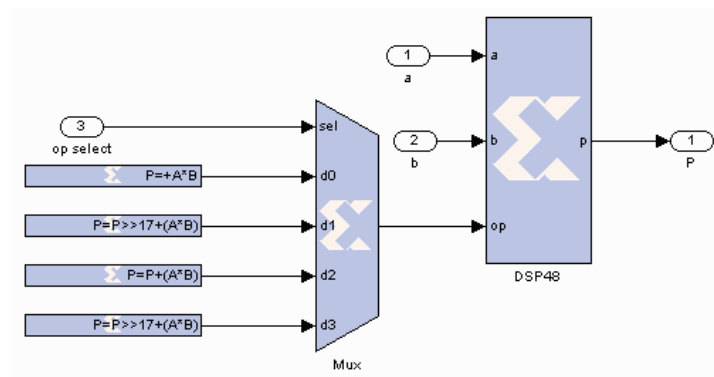

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Type:** specifies the type of constant. Can be one of Boolean, signed fixed-point, unsigned fixed-point, or DSP48 instruction.
- **Constant Value:** specifies the value of the constant. When changed, the new value appears on the block icon. If the constant cannot be expressed exactly in the specified fixed-point type, its value is rounded and saturated as needed. A positive value is implemented as an unsigned number, a negative value as signed.
- **Sampled Constant:** allows a sample period to be associated with the constant output and inherited by blocks that the constant block drives. (This is useful mainly because the blocks eventually target hardware and the Simulink sample periods are used to establish hardware clock periods.)

DSP48 tab

When DSP48 Instruction is selected for type, the DSP48 tab is activated. A detailed description of the DSP48 can be found in the [DSP48](#) block description.

- **DSP48 operation:** displays the selected DSP48 instruction.
- **Operation select:** allows the selection of a DSP48 instruction. Selecting custom reveals mask parameters that allow the formation of an instruction in the form $z\_mux \ +/- (yx\_mux + carry)$.
- **Z Mux:** specifies the 'Z' source to the DSP48's adder to be one of {'0', 'C', 'PCIN', 'P', 'C', 'PCIN>>17', 'P>>17'}.
- **Operand:** specifies whether the DSP48's adder is to perform addition or subtraction.
- **YX Muxes:** specifies the 'YX' source to the DSP48's adder to be one of {'0', 'P', 'A:B', 'A*B', 'C', 'P+C', 'A:B+C'}. 'A:B' implies that A[17:0] is concatenated with B[17:0] to produce a 36-bit value to be used as an input to the DSP48 adder.
- **Carry Input:** specifies the 'carry' source to the DSP48's adder to be one of {'0', '1', 'CIN', '~SIGN(P or PCIN)', '~SIGN(A:B or A*B)', '~SIGND(A:B or A*B)'}. '~SIGN (P or PCIN)' implies that the carry source is either P or PCIN depending on the Z Mux setting. '~SIGN(A*B or A:B)' implies that the carry source is either A*B or A:B depending on the YX Mux setting. The option '~SIGND (A*B or A:B)' selects a delayed version of '~SIGN(A*B or A:B)'.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

The constant block does not use a Xilinx LogiCORE™.

Appendix: DSP48 Control Instruction Format

Instruction Field Name	Location	Mnemonic	Description
YX Mux	op[3:0]	0	0
		P	DSP48 output register
		A:B	Concat inputs A and B (A is MSB)
		A*B	Multiplication of inputs A and B
		C	DSP48 input C
		P+C	DSP48 input C plus P
		A:B+C	Concat inputs A and B plus C register
Z Mux	op[6:4]	0	0
		PCIN	DSP48 cascaded input from PCOUT
		P	DSP48 output register
		C	DSP48 C input
		PCIN>>17	Cascaded input downshifted by 17
		P>>17	DSP48 output register downshifted by 17
Operand	op[7]	+	Add
		-	Subtract

Instruction Field Name	Location	Mnemonic	Description
Carry In	op[8]	0 or 1	Set carry in to 0 or 1
		CIN	Select cin as source
		'~SIGN(P or PCIN)	Symmetric round P or PCIN
		'~SIGN(A:B or A*B)	Symmetric round A:B or A*B
		'~SIGND(A:B or A*B)	Delayed symmetric round of A:B or A*B

Convert

This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Data Types, Math, and Index.*



The Xilinx Convert block converts each input sample to a number of a desired arithmetic type. For example, a number can be converted to a signed (two's complement) or unsigned value.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

The Type parameter in this block uses the same description as the Arithmetic Type description in the topic [Common Options in Block Parameters Dialog Boxes](#).

Quantization

Quantization errors occur when the number of fractional bits is insufficient to represent the fractional portion of a value. The options are to **Round** to the nearest representable value (or to the value furthest from zero if there are two equidistant nearest representable values), or to **Truncate** (i.e., to discard bits to the right of the least significant representable bit).

Overflow

Overflow errors occur when a value lies outside the representable range. For overflow the options are to **Saturate** to the largest positive/smallest negative value, to **Wrap** (i.e., to discard bits to the left of the most significant representable bit), or to **Flag as error** (an overflow as a Simulink error) during simulation. **Flag as error** is a simulation only feature. The hardware generated is the same as when **Wrap** is selected.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Pipeline for maximum performance:** directs the block to use the latency value to pipeline to the fullest extent possible. Latency is distributed in the following priority based on the selected pipeline option.


Latency (pipeline=0): Delay pipeline at the output.

Latency (pipeline=1): Output register, register before saturation, register before quantization and extra latency as a delay pipeline at the output.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Convolutional Encoder v3_0

This block is listed in the following Xilinx Blockset libraries: *Communication and Index*.



The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.

Values are encoded using a linear feed forward shift register which computes modulo-two sums over a sliding window of input data, as shown in the figure below. The length of the shift register is specified by the constraint length. The convolution codes specify which bits in the data window contribute to the modulo-two sum. Resetting the block will set the shift register to zero. The encoder rate is the ratio of input to output bit length; thus, for example a rate 1/2 encoder outputs two bits for each input bit. Similarly, a rate 1/3 encoder outputs three bits for each input bit.

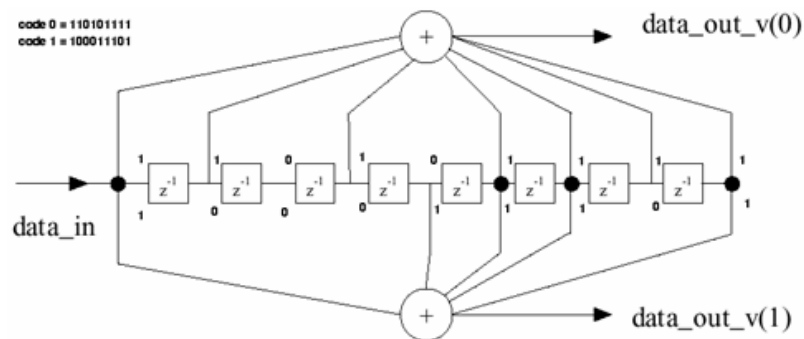

Block Interface

The block has between two to four input ports and three to eight output ports. The `din` port must have type `UFix1_0`. It accepts the values to be encoded. The `vin` port indicates that the values presented on `din` are valid. Only valid values are encoded. The ports `dout1` through `dout7` output the encoded data. The port `dout1` corresponds to the first code in the array, `dout2` to the second, and so on. The number of codes in the array sets the output rate of the encoder and consequently the number of data output ports. The output port `vout` indicates the validity of output values.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Constraint length:** Constraint Length: Equals $n+1$, where n is the length of the constraint register in the encoder.
- **Convolution code array (octal):** Array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Xilinx LogiCORE

The block uses the following Xilinx LogiCORE™ Convolution Encoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Convolutional Encoder v3_0	Convolutional Encoder	V3.0	•	•			•	•		


Convolutional Encoder v6_0

This block is listed in the following Xilinx Blockset libraries: Communication and Index.



The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.

Values are encoded using a linear feed forward shift register which computes modulo-two sums over a sliding window of input data, as shown in the figure below. The length of the shift register is specified by the constraint length. The convolution codes specify which bits in the data window contribute to the modulo-two sum. Resetting the block will set the shift register to zero. The encoder rate is the ratio of input to output bit length; thus, for example a rate 1/2 encoder outputs two bits for each input bit. Similarly, a rate 1/3 encoder outputs three bits for each input bit.

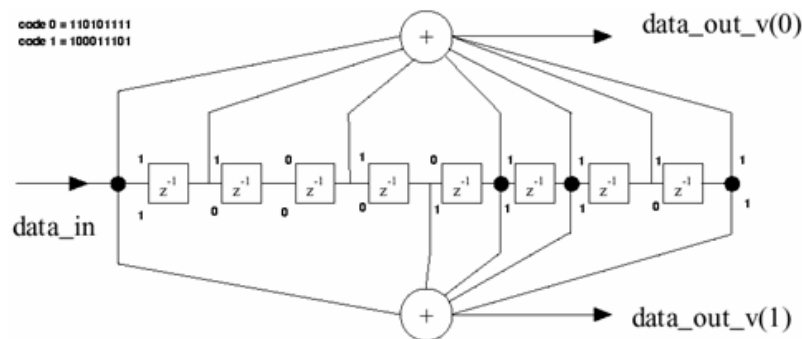

Block Interface

The block has between two to four input ports and three to eight output ports. The din port must have type UFix1_0. It accepts the values to be encoded. The vin port indicates that the values presented on din are valid. Only valid values are encoded. The ports dout1 through dout7 output the encoded data. The port dout1 corresponds to the first code in the array, dout2 to the second, and so on. The number of codes in the array sets the output rate of the encoder and consequently the number of data output ports. The output port vout indicates the validity of output values.

Block Parameters Dialog Box

The following figure shows the block parameters dialog box.

Basic tab

Parameters specific to the Basic tab are:

- **Constraint length:** Constraint Length: Equals $n+1$, where n is the length of the constraint register in the encoder.
- **Convolution code array (octal):** Array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Xilinx LogiCORE

The block uses the following Xilinx LogiCORE™ Convolution Encoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Convolutional Encoder v6_0	Convolutional Encoder	V6.0	•	•			•	•	•	•


Convolutional Encoder v6_1

This block is listed in the following Xilinx Blockset libraries: Communication and Index.



The Xilinx Convolutional Encoder block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.

Values are encoded using a linear feed forward shift register which computes modulo-two sums over a sliding window of input data, as shown in the figure below. The length of the shift register is specified by the constraint length. The convolution codes specify which bits in the data window contribute to the modulo-two sum. Resetting the block will set the shift register to zero. The encoder rate is the ratio of input to output bit length; thus, for example a rate 1/2 encoder outputs two bits for each input bit. Similarly, a rate 1/3 encoder outputs three bits for each input bit.

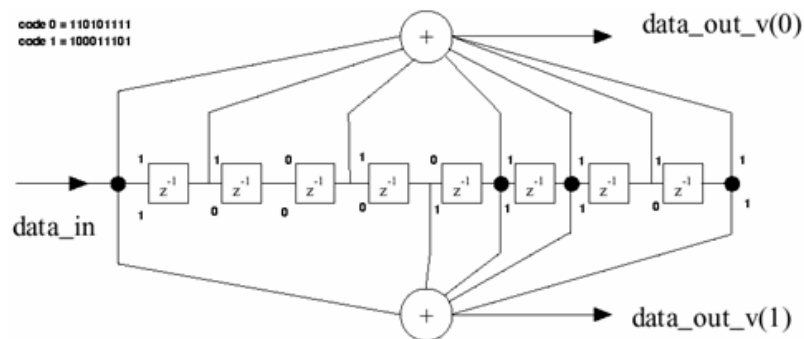

This block supports Spartan-3A DSP as well as the following previously-supported technologies: Virtex™-II, Virtex-II Pro, Virtex-4, Virtex-5, Spartan™-3, Spartan-3A/3AN, and Spartan-3E.

Block Interface

The block has between two to four input ports and three to eight output ports. The din port must have type UFix1_0. It accepts the values to be encoded. The vin port indicates that the values presented on din are valid. Only valid values are encoded. The ports dout1 through dout7 output the encoded data. The port dout1 corresponds to the first code in the array, dout2 to the second, and so on. The number of codes in the array sets the output rate of the encoder and consequently the number of data output ports. The output port vout indicates the validity of output values.

Block Parameters Dialog Box

The following figure shows the block parameters dialog box.

Basic tab

Parameters specific to the Basic tab are:

- **Constraint length:** Constraint Length: Equals $n+1$, where n is the length of the constraint register in the encoder.

- **Convolution code array (octal):** Array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered.

Other parameters used by this block are explained in the topic
[Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The block uses the following Xilinx LogiCORE™ Convolution Encoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™				Virtex™			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Convolutional Encoder v6_0	Convolutional Encoder	V6.0		•	•	•	.	•	•	•

Counter

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Math, and Index.



The Xilinx Counter block implements a free running or count-limited type of an up, down, or up/down counter. The counter output can be specified as a signed or unsigned fixed-point number.

Free running counters are the least expensive in FPGA hardware. The free running up, down, or up/down counter can also be configured to load the output of the counter with a value on the input *din* port by selecting the **Provide Load Pin** option in the block's parameters.

$$out(n) = \begin{cases} InitialValue & \text{if } n = 0 \\ (out(n-1) + Step) \bmod 2^N & \text{otherwise} \end{cases}$$

The output for a free running up counter is calculated as follows:

$$out(n) = \begin{cases} InitialValue & \text{if } n = 0 \\ din(n-1) & \text{if } load(n-1) = 1 \\ (out(n-1) + Step) \bmod 2^N & \text{otherwise} \end{cases}$$

Here *N* denotes the number of bits in the counter. The free running down counter calculations replace addition with subtraction.

For the free running up/down counter, the counter performs addition when input up port is 1 or subtraction when the input up port is 0.

A count-limited counter is implemented by combining a free running counter with a comparator. Count limited counters are limited to only 64 bits of output precision. Count limited types of a counter can be configured to step between the initial and ending values, provided the step value evenly divides the difference between the initial and ending values.

The output for a count limited up counter is calculated as follows:

$$out(n) = \begin{cases} InitialValue & \text{if } n = 0 \text{ or } out(n-1) = CountLimit \\ (out(n-1) + Step) \bmod 2^N & \text{otherwise} \end{cases}$$

The count-limited down counter calculation replaces addition with subtraction. For the count limited up/down counter, the counter performs addition when input up port is 1 or subtraction when input up port is 0.

The output for a free running up counter with load capability is calculated as follows:

$$out(n) = \begin{cases} StartCount & \text{if } n = 0 \text{ or } rst(n) = 1 \\ din & \text{if } rst(n) = 0 \text{ and } load(n) = 1 \\ (out(n-1) + CountByValue) \bmod 2^N & \text{otherwise} \end{cases}$$

Here *N* denotes the number of bits in the counter. The down counter calculations replace addition by subtraction.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Counter type:** specifies the counter to be a count-limited or free running counter.
- **Number of bits:** specifies the number of bits in the block output.
- **Binary point:** specifies the location of the binary point in the block output.
- **Output type:** specifies the block output to be either Signed or Unsigned.
- **Initial value:** specifies the initial value to be the output of the counter.
- **Count to value:** specifies the ending value, the number at which the count limited counter resets. A value of Inf denotes the largest representable output in the specified precision. This cannot be the same as the initial value.
- **Step:** specifies the increment or decrement value.
- **Count direction:** specifies the direction of the count (up or down) or provides an optional input port up (when up/down is selected) for specifying the direction of the counter.
- **Provide load Port:** when checked, the block operates as a free running load counter with explicit load and din port. The load capability is available only for the free running counter.

Implementation tab

Parameters specific to the Implementation tab are as follows:

Implementation Details

Use behavioral HDL (otherwise use core): The block is implemented using behavioral HDL. This gives the downstream logic synthesis tool maximum freedom to optimize for performance or area.

- **Implement using:** Core logic can be implemented in **Fabric** or in a **DSP48**, if a DSP48 is available in the target device. The default is **Fabric**.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The block uses a Xilinx LogiCORE™

DAFIR v9_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.




The Xilinx DAFIR filter block implements a distributed arithmetic finite-impulse response (FIR) digital filter, or a bank of identical FIR filters (multichannel mode).

An N-tap filter is defined by N filter coefficients (or taps) $h(0), h(1), \dots, h(n-1)$. Here each $h(i)$ is a Xilinx fixed-point number. The filter block accepts a stream of Xilinx fixed-point data samples $x(0), x(1), \dots$, and at time n computes the output.

Block Interface


The FIR block can be configured to have one to eight data channels as well as several optional ports.

- **vin**: marks each x_n symbol as valid or invalid. For a decimating FIR filter, the state of the vin port must match for every group of samples to be decimated, i.e. the groupings of N vin samples, where N is the decimation factor, must all be either 1 or 0. The sample groupings are aligned from the start of the simulation ($t=0$).
- **vout**: marks each symbol produced on y_n as valid or invalid.
- **rfd**: indicates whether the block is ready to accept new data. This port drives a Boolean signal at the same data rate as the input port, x_n . This signal is asserted at the start of simulation and remains asserted (true) until a reload cycle is initiated. The rfd signal will go low on the cycle immediately following an assertion of the load signal. The rfd signal is reasserted once the block has completed the reload sequence. Available when reloading coefficients or when serial input is selected.
- **sel_in**: indicates current filter input channel number when serial input is selected.
- **sel_out**: indicates current filter output channel number when serial input is selected.

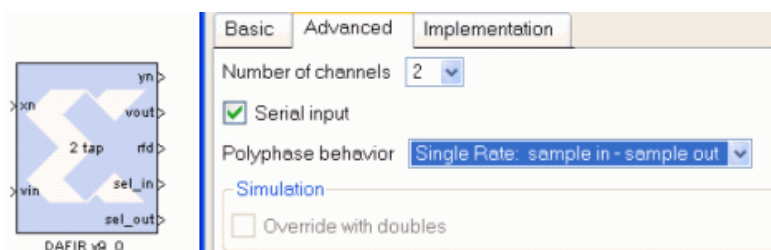

Reloading Coefficients

The DA FIR filter provides optional ports for coefficient reloading. When a reload sequence is initiated, the filter stops accepting new data input samples and begins accepting new filter coefficients. Once all of the new coefficients have been written, the filter processes the coefficients and initializes the necessary internal data structures. The amount of time required for the filter to reload is a function of the filter length and type. After the reloading sequence has completed, the filter comes back online and continues to accept new input data samples. For more information about the reload sequence and filter reload time, please refer to the FIR core data sheet. An example reload sequence timing diagram is shown below:

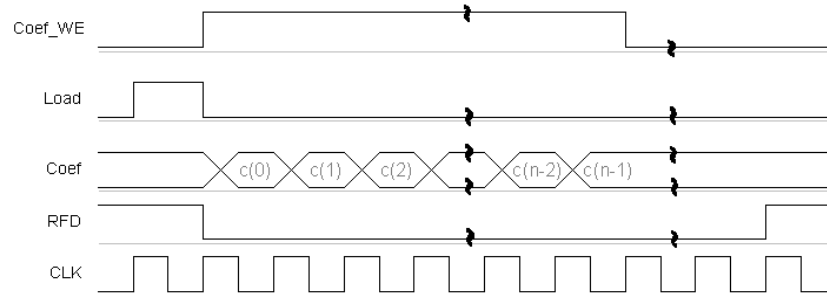


Optional Ports for Reloading Coefficients

coef: new filter coefficients are written to the block through this port. The number of bits and binary point position of the coef port must match the number of coefficient bits and coefficient binary point position specified in the block mask. This port must run at the same data rate as the input port, xn.

coef_we: a write enable signal that controls when the coef port data is written to the block. This port can be used to stagger the time at which new coefficients are written into the filter once a reload cycle has started. The first new coefficient can be written to the filter on the cycle following the assertion of the load signal. This port should be driven by a Boolean signal with a data rate equal to the data rate of the input port, xn.

load: an assertion (true) of the load port initiates a coefficient reload sequence. The load signal should be pulsed for one cycle; subsequent assertions during a reload sequence will restart the reloading process. This port should be driven by a Boolean signal with a data rate equal to the data rate of the input port, xn.

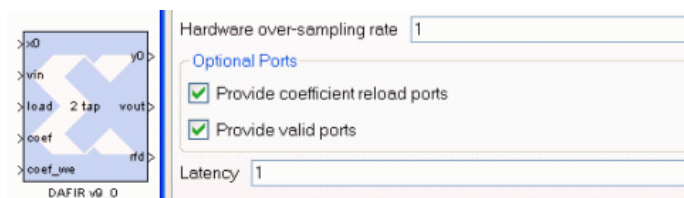

Block Parameters Dialog Box

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Coefficients:** vector of filter coefficients; note that these can be evaluated from a MATLAB workspace variable and may in turn be computed by MATLAB. You can also refer to examples in the System Generator Tutorial.
- **Structure:** the Xilinx Smart-IPÔ FIR core's preferred implementation depends on the structure of the sequence of filter taps. You can choose one of these: inferred from coefficients, none, symmetric, negative symmetric, half band, and interpolate fir.
- **Number of bits (always signed):** Number of bits to use for representing the filter coefficients.
- **Binary Point:** Number of fractional bits to use for representing the filter coefficients.

Advanced tab

Parameters specific to the Advanced tab are as follows:

- **Number of channels:** one to eight, inclusive. For multichannel filters, polyphase behavior is not supported, i.e. the filter must be single rate. The core, which processes the channels serially, will be over-clocked by the System Generator by a factor equaling the number of channels so as to provide the necessary throughput. To reduce control logic overhead, the block requires that the valid bits match on all inputs.
- **Serial input:** when the number of channels is greater than one, the input to the filter can be either serial (time division multiplexed) or parallel.
- **Polyphase behavior:** Decimation, Interpolation, Single rate.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE


The block always uses the Xilinx LogiCORE™ Distributed Arithmetic FIR Filter.

The Simulink model operates on a sample in/sample out basis, but the core has the capability of using serial arithmetic by over-clocking. Although this adds latency, it has the benefit of reducing the hardware required for the filter. Refer to the core data sheet for more details of the filter modes and parameters.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
DAFIR v9_0	Distributed Arithmetic FIR Filter	V9.0	•	•			•	•	•	


DDS Compiler v1_1

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.




The Xilinx DDS Compiler v1_1 Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.

To understand the DDS, it is necessary to know how the block is implemented in FPGA hardware. The following figure shows a high-level view of the Xilinx LogiCORE™. The phase increment and phase offset can be defined as constants or can be set dynamically through optional input ports. These values are defined in terms of cycles per sample. For example, a phase increment of one tenth (1/10) implies that in 10 time samples, one sinusoid is completed. After the phase increment is accumulated, the phase offset is added to the result. If dithering is used, the dithering sequence (which prevents phase error from being introduced by the quantizer) is added prior to quantization. The quantized value is then used to index into the sine/cosine lookup table, mapping phase-space into time.

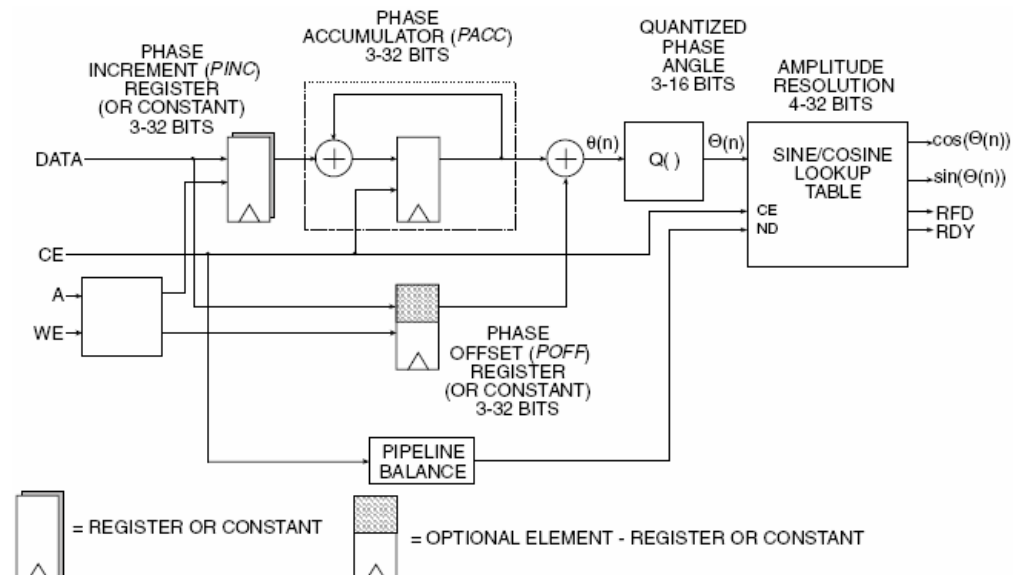

Block Interface



Port functions on the DDS Compiler v1_1 block are as follows:

- **channel (input):** The 4-bit wide input port that maps to the least significant 4 bits on the underlying LogiCORE™ A input port. This input port specifies with which channel the current input (or output) is associated.
- **data:** time-shared data bus. The data port is used for supplying values to the programmable offset frequency memory and/or programmable phase offset memory. Maps to the DATA bus on the underlying LogiCORE
- **we:** write enable. Enables a write operation to the offset frequency memory and/or the programmable frequency memory. Which memory is written to is determined by the sel port value.
- **sel:** select port. Maps to the MSB on the A input bus of the underlying LogiCORE. Selects whether to write the data to the offset frequency memory (PINC) or the phase offset memory (POFF). When sel is 0 and we is 1, data is written to the offset frequency memory. When sel is 1 and we is 1, data is written to the phase offset memory.
- **en:** user enable. When '1', the block is active. Maps to the CE port on the underlying LogiCORE.
- **rst:** synchronous reset. When '1', the internal memories of the block are reset. Maps to the SCLR (Synchronous clear) input on the underlying LogiCORE.
- **sin:** sine output value. Maps to the SINE output on the underlying LogiCORE.
- **cos:** cosine output value. Maps to the COSINE output on the underlying LogiCORE.
- **rdy:** output data ready - active High. Indicates when the output samples are valid.
- **rfd:** ready for data - active High. RFD is a dataflow control signal present on many Xilinx LogiCOREs. In the context of the DDS, it is supplied only for consistency with other LogiCORE cores. This optional port is always tied to VCC.
- **channel (output):** Channel index. Indicates which channel is currently available at the output when the underlying core is configured for multi-channel operation. This is an unsigned number. It's width is determined by the number of channels that are specified by the **Output frequency array (MHZ)** parameter on the **Basic** tab.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **DDS clock rate (MHz):** frequency at which the DDS core will be clocked.
- **Spurious free dynamic range (dB):** defines the frequency domain requirements of the out-of-band noise generated by the DDS outputs. The range is from 16 to 115 dB of spur suppression. Note that an SFDR value of 102 dB or greater will force an implementation to employ a Taylor Series Correction which requires the use of embedded multipliers.
- **Frequency resolution (Hz):** determines the granularity of the tuning frequency.
- **Output Function:** specifies the function(s) that the block will calculate; Sine, Cosine, or both Sine and cosine.
- **Negative Sine:** negates the sine output.
- **Negative Cosine:** negates the cosine output.
- **Output Frequency Type:** specifies the output frequency to be either Fixed or Programmable. The choice of Programmable adds the channel, data, and we input ports to the block.
- **Output frequency array (MHz):** for each channel, an independent frequency can be entered into an array.
- **Phase Offset Type:** specifies phase offset to be Fixed, Programmable or None. The choice of Programmable adds the channel, data, and we input ports to the block.
- **Phase offset angle array:** for each channel, an independent offset can be entered into an array. The entered values will be multiplied by 2π radians. Activated when the Phase Offset Type is Fixed.

Advanced tab

Parameters specific to the DDS block on the Advanced tab are as follows:

- **Noise Shaping:** determines whether a Phase dithering or Taylor series corrected DDS implementation is generated. The Auto option allows the block to make the best choice. The default is None.
- **Provide channel port:** provide an output channel port to indicate which channel the current output sample corresponds to.
- **Provide rfd port:** Ready for data - active High. RFD is a dataflow control signal present on many Xilinx LogiCORE™ cores. In the context of the DDS, it is supplied only for consistency with other LogiCORE-based blocks. This optional port is always tied to VCC.
- **Provide rdy port:** Output data ready - active High. Indicates when the output samples are valid.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Memory type:** directs the block to be implemented either with Distributed memory or Block RAM. The default is Distributed memory.
- **DSP48 Use:** When set to **Maximal**, uses DSP48s to extract maximum performance.
- **Latency configuration:** When set to **Auto**, pipelines the core for maximum performance and allows clocking the core at high rates.
- **Accumulator latency:** specifies the latency in the phase accumulator to be zero or one.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the Xilinx LogiCORE™ DDS Compiler v1.1

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
DDS Compiler v1_1	DDS Compiler v1_1	V1.1	•				•	•		


DDS Compiler v2_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.




The Xilinx DDS Compiler v2_0 block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.

To understand the DDS, it is necessary to know how the block is implemented in FPGA hardware. The following figure shows a high-level view of the Xilinx LogiCORE™. The phase increment and phase offset can be defined as constants or can be set dynamically through optional input ports. These values are defined in terms of cycles per sample. For example, a phase increment of one tenth (1/10) implies that in 10 time samples, one sinusoid is completed. After the phase increment is accumulated, the phase offset is added to the result. If dithering is used, the dithering sequence (which prevents phase error from being introduced by the quantizer) is added prior to quantization. The quantized value is then used to index into the sine/cosine lookup table, mapping phase-space into time.

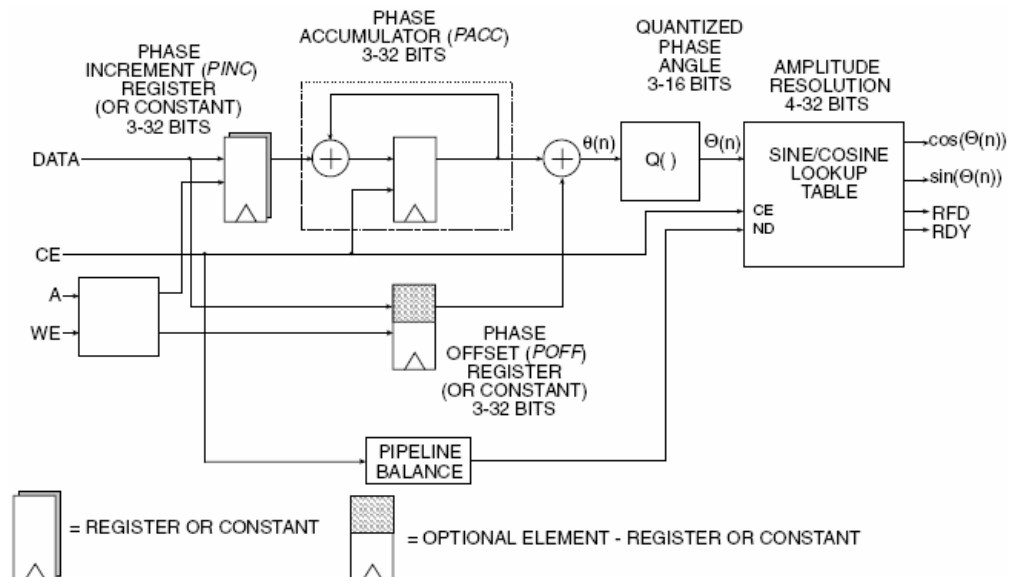

Block Interface



Port functions on the DDS Compiler v2_0 block are as follows:

Input Ports

- **channel****sel**: The 4-bit wide input port that maps to the least significant 4 bits on the underlying LogiCORE A input port. This input port specifies with which channel the current input (or output) is associated.
- **data**: time-shared data bus. The data port is used for supplying values to the programmable offset frequency memory and/or programmable phase offset memory. Maps to the DATA bus on the underlying LogiCORE
- **we**: write enable. Enables a write operation to the offset frequency memory and/or the programmable frequency memory. Which memory is written to is determined by the sel port value. Maps to the WE port on the underlying LogiCORE.
- **sel**: select port. Maps to the MSB on the A input bus of the underlying LogiCORE. Selects whether to write the data to the offset frequency memory (PINC) or the phase offset memory (POFF). When sel is 0 and we is 1, data is written to the offset frequency memory. When sel is 1 and we is 1, data is written to the phase offset memory.
- **en**: user enable. When '1', the block is active. Maps to the CE port on the underlying LogiCORE.
- **rst**: synchronous reset. When '1', the internal memories of the block are reset. Maps to the SCLR (Synchronous clear) input on the underlying LogiCORE.

Output Ports

- **sin**: sine output value. Maps to the SINE output on the underlying LogiCORE.
- **cos**: cosine output value. Maps to the COSINE output on the underlying LogiCORE.
- **rdy**: output data ready - active High. Indicates when the output samples are valid.
- **rfd**: ready for data - active High. RFD is a dataflow control signal present on many Xilinx LogiCOREs. In the context of the DDS, it is supplied only for consistency with other LogiCORE cores. This optional port is always tied to VCC.
- **channel**: Channel index. Indicates which channel is currently available at the output when the underlying core is configured for multi-channel operation. This is an unsigned number. It's width is determined by the number of channels that are specified by the **Output frequency array (MHZ)** parameter on the **Basic** tab.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **DDS clock rate (MHz):** frequency at which the DDS core will be clocked.
- **Spurious free dynamic range (dB):** defines the frequency domain requirements of the out-of-band noise generated by the DDS outputs. The range is from 16 to 115 dB of spur suppression. Note that an SFDR value of 102 dB or greater will force an implementation to employ a Taylor Series Correction which requires the use of embedded multipliers.
- **Frequency resolution (Hz):** determines the granularity of the tuning frequency.
- **Output Function:** specifies the function(s) that the block will calculate; Sine, Cosine, or both Sine and cosine.
- **Negative Sine:** negates the sine output.
- **Negative Cosine:** negates the cosine output.
- **Output Frequency Type:** specifies the output frequency to be either Fixed or Programmable. The choice of Programmable adds the channel, data, and we input ports to the block.
- **Output frequency array (MHz):** for each channel, an independent frequency can be entered into an array.
- **Phase Offset Type:** specifies phase offset to be Fixed, Programmable or None. The choice of Programmable adds the channel, data, and we input ports to the block.
- **Phase offset angle array:** for each channel, an independent offset can be entered into an array. The entered values will be multiplied by 2π radians. Activated when the **Phase Offset Type** is Fixed.

Advanced tab

Parameters specific to the DDS block on the Advanced tab are as follows:

- **Noise Shaping:** determines whether a Phase dithering or Taylor series corrected DDS implementation is generated. The Auto option allows the block to make the best choice. The default is None.
- **Provide channel port:** provide an output channel port to indicate which channel the current output sample corresponds to.
- **Provide rfd port:** Ready for data - active High. RFD is a dataflow control signal present on many Xilinx LogiCORE™ cores. In the context of the DDS, it is supplied only for consistency with other LogiCORE-based blocks. This optional port is always tied to VCC.
- **Provide rdy port:** Output data ready - active High. Indicates when the output samples are valid.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Memory type:** directs the block to be implemented either with Distributed memory or Block RAM. The default is Block RAM
- **DSP48 Use:** When set to **Maximal**, uses DSP48s to extract maximum performance.
- **Latency configuration:** When set to **Auto**, pipelines the core for maximum performance and allows clocking the core at high rates.
- **Accumulator latency:** specifies the latency in the phase accumulator to be zero or one.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the Xilinx LogiCORE™ DDS Compiler v2.0.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
DDS Compiler v2_0	DDS Compiler v2_0	V2.0	•	•	•	•	•	•	•	•


DDS Compiler 2.1

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.




The Xilinx DDS Compiler v2.1 block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.

To understand the DDS, it is necessary to know how the block is implemented in FPGA hardware. The following figure shows a high-level view of the Xilinx LogiCORE™. The phase increment and phase offset can be defined as constants or can be set dynamically through optional input ports. These values are defined in terms of cycles per sample. For example, a phase increment of one tenth (1/10) implies that in 10 time samples, one sinusoid is completed. After the phase increment is accumulated, the phase offset is added to the result. If dithering is used, the dithering sequence (which prevents phase error from being introduced by the quantizer) is added prior to quantization. The quantized value is then used to index into the sine/cosine lookup table, mapping phase-space into time.

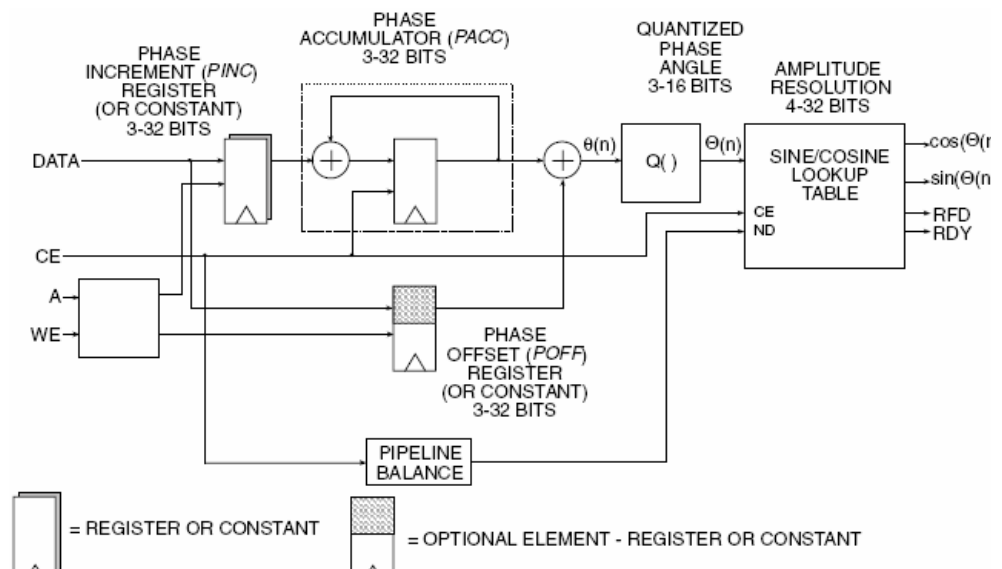

Block Interface



Port functions on the DDS Compiler v2.1 block are as follows:

Input Ports

- **channel****sel**: The 4-bit wide input port that maps to the least significant 4 bits on the underlying LogiCORE A input port. This input port specifies with which channel the current input (or output) is associated.
- **data**: time-shared data bus. The data port is used for supplying values to the programmable offset frequency memory and/or programmable phase offset memory. Maps to the DATA bus on the underlying LogiCORE
- **we**: write enable. Enables a write operation to the offset frequency memory and/or the programmable frequency memory. Which memory is written to is determined by the sel port value. Maps to the WE port on the underlying LogiCORE.
- **sel**: select port. Maps to the MSB on the A input bus of the underlying LogiCORE. Selects whether to write the data to the offset frequency memory (PINC) or the phase offset memory (POFF). When sel is 0 and we is 1, data is written to the offset frequency memory. When sel is 1 and we is 1, data is written to the phase offset memory.
- **en**: user enable. When '1', the block is active. Maps to the CE port on the underlying LogiCORE.
- **rst**: synchronous reset. When '1', the internal memories of the block are reset. Maps to the SCLR (Synchronous clear) input on the underlying LogiCORE.

Output Ports

- **sin**: sine output value. Maps to the SINE output on the underlying LogiCORE.
- **cos**: cosine output value. Maps to the COSINE output on the underlying LogiCORE.
- **rdy**: output data ready - active High. Indicates when the output samples are valid.
- **rfd**: ready for data - active High. RFD is a dataflow control signal present on many Xilinx LogiCOREs. In the context of the DDS, it is supplied only for consistency with other LogiCORE cores. This optional port is always tied to VCC.
- **channel**: Channel index. Indicates which channel is currently available at the output when the underlying core is configured for multi-channel operation. This is an unsigned number. It's width is determined by the number of channels that are specified by the **Output frequency array (MHZ)** parameter on the **Basic** tab.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

Function selection

- **Output selection:** specifies the function(s) that the block will calculate; Sine, Cosine, or both Sine and cosine.

Polarity

- ♦ **Negative Sine:** negates the sine output.
- ♦ **Negative Cosine:** negates the cosine output.

Performance Options

- **DDS clock rate (MHz):** frequency at which the DDS core will be clocked.
- **Spurious free dynamic range (dB):** defines the frequency domain requirements of the out-of-band noise generated by the DDS outputs. The range is from 16 to 115 dB of spur suppression. Note that an SFDR value of 102 dB or greater will force an implementation to employ a Taylor Series Correction which requires the use of embedded multipliers.
- **Frequency resolution (Hz):** determines the granularity of the tuning frequency.
- **Output Frequency Type:** specifies the output frequency to be either Fixed or Programmable. The choice of Programmable adds the channel, data, and we input ports to the block.

Optional Ports

- **rfd:** Ready for data - active High. RFD is a dataflow control signal present on many Xilinx LogiCORE™ cores. In the context of the DDS, it is supplied only for consistency with other LogiCORE-based blocks. This optional port is always tied to VCC.
- **rdy:** Output data ready - active High. Indicates when the output samples are valid.
- **channel:** provide an output channel port to indicate which channel the current output sample corresponds to.

Output Frequency tab

- **Output frequency array (MHz):** for each channel, an independent frequency can be entered into an array.

Output Phase Offset tab

- **Phase Offset:** specifies the phase offset to be Fixed, Programmable or None. The choice of Programmable adds the channel, data, and we input ports to the block.
- **Phase Offset Angles (x 2pi radians):** for each channel, an independent offset can be entered into an array. The entered values will be multiplied by 2π radians. Activated when the **Phase Offset Type** is Fixed.

Implementation tab

Parameters specific to the Implementation tab are as follows:

Implementation Options

- **Memory type:** directs the block to be implemented either with Distributed memory or Block RAM. The default is Block RAM
- **DSP48 Use:** When set to **Maximal**, uses DSP48s to extract maximum performance.

Performance Options

- **Latency configuration:** When set to **Auto**, pipelines the core for maximum performance and allows clocking the core at high rates.
- **Accumulator latency:** specifies the latency in the phase accumulator to be zero or one.

Other parameters used by this block are explained in the topic

[Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the Xilinx LogiCORE™ DDS Compiler v2.0.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
DDS Compiler 2.1	DDS Compiler v2_1	V2.1	•	•	•	•	•	•	•	•


DDS v4_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The Xilinx DDS Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.

To understand the DDS, it is necessary to know how the block is implemented in FPGA hardware. The following figure shows a high-level view of the Xilinx LogiCORE™. The phase increment and phase offset can be defined as constants or can be set dynamically through optional input ports. These values are defined in terms of cycles per sample. For example, a phase increment of one tenth (1/10) implies that in 10 time samples, one sinusoid is completed. After the phase increment is accumulated, the phase offset is added to the result. If dithering is used, the dithering sequence (which prevents phase error from being introduced by the quantizer) is added prior to quantization. The quantized value is then used to index into the sine/cosine lookup table, mapping phase-space into time.

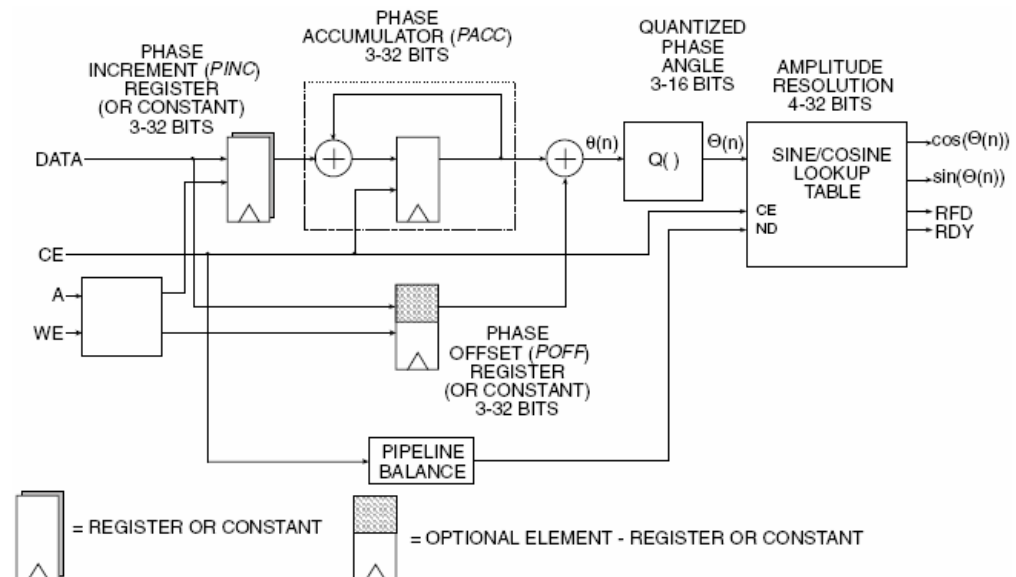

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Function:** specifies the function that the block will calculate.
- **Negative sine:** output from the sine port will be negated.
- **Negative cosine:** output from the cosine port will be negated.
- **Output width:** number of bits in the output signal; value must be between 4 and 32 inclusive.

- **Phase increment type:** specifies $\Delta\theta$ to be either constant or register. Choosing register activates optional ports on the block.
- **Normalized phase increment:** specifies value of phase increment constant, a multiple of 2π . The number of bits is determined in one of two ways. If the increment type is Register, the number of bits is set to the width of the data port. If the increment type is Constant, the number of bits is inferred from the phase increment value.
- **Phase offset type:** specifies phase offset to be Constant, Register, or None. Choosing register activates optional ports on the block.
- **Normalized phase offset:** specifies value of phase offset constant, as a multiple of 2π . The number of bits is determined in one of two ways. If the offset type is Register, the number of bits is set to the width of the data port. If the offset type is Constant, the number of bits is inferred from the phase offset value.

Advanced tab

Parameters specific to the DDS block on the Advanced tab are as follows:

- **Lookup table input width:** specifies the number of address bits into the sine/cosine lookup table; value must be at least 3. The width must be less than or equal to $\min(a,b)$ where a is the accumulator width, and b is 16 (if block RAM is used) or 10 (if distributed RAM is used).
- **Accumulator latency:** specifies the latency in the phase accumulator to be zero or one.
- **Accumulator width:** specifies the phase accumulator width; value must be between 3 and 32 inclusive.
- **Use phase dithering:** when checked, a dither sequence is added to the result of the phase accumulator.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Memory type:** directs the block to be implemented either with distributed or block RAM.
- **Pipeline for maximum performance:** when checked, the implementation is fully pipelined.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the Xilinx LogiCORE™ DDS v4.0.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
DDS v4_0	DDS	V4.1	•				•	•		


DDS v5_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.




The Xilinx DDS Block is a direct digital synthesizer, also commonly called a numerically controlled oscillator (NCO). The block uses a lookup table scheme to generate sinusoids. A digital integrator (accumulator) generates a phase that is mapped by the lookup table into the output waveform.

To understand the DDS, it is necessary to know how the block is implemented in FPGA hardware. The following figure shows a high-level view of the Xilinx LogiCORE™. The phase increment and phase offset can be defined as constants or can be set dynamically through optional input ports. These values are defined in terms of cycles per sample. For example, a phase increment of one tenth (1/10) implies that in 10 time samples, one sinusoid is completed. After the phase increment is accumulated, the phase offset is added to the result. If dithering is used, the dithering sequence (which prevents phase error from being introduced by the quantizer) is added prior to quantization. The quantized value is then used to index into the sine/cosine lookup table, mapping phase-space into time.

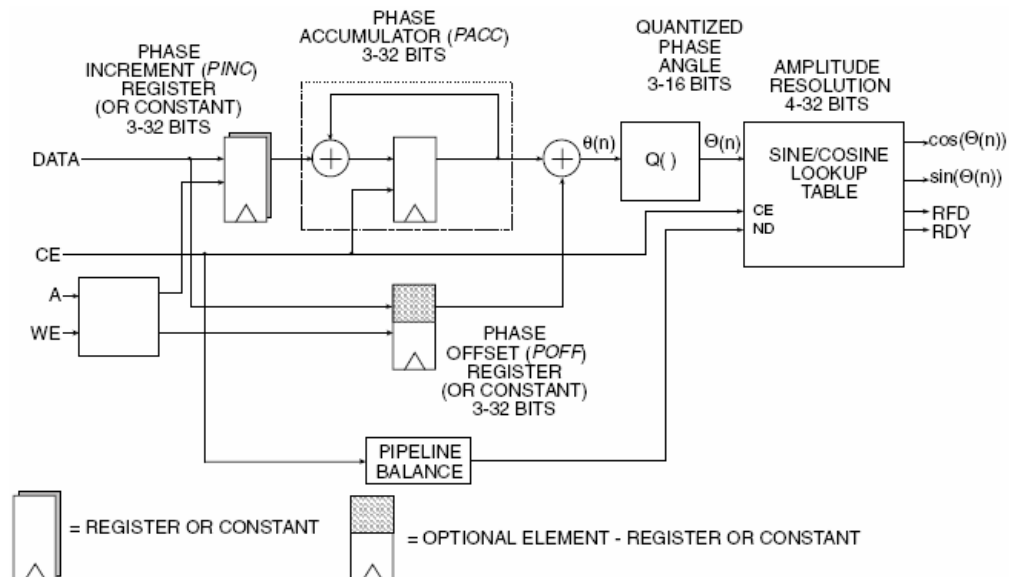

Block Ports



Port functions on the DDS block:

- **channel:** specifies with which channel the current input (or output) is associated. The channel input port maps to the least significant 4 bits on the DDS v5 core's A input port.
- **data:** time shared data bus. The data port is used for supplying values to the programmable offset frequency memory and/or programmable phase offset memory.
- **we:** write enable. Enables a write operation to the offset frequency memory and/or the programmable frequency memory. Which memory is written to is determined by the `sel` port value.
- **sel:** select port. Selects whether to write the data to the offset frequency memory or the phase offset memory. When `sel` is 0 and `we` is 1, data is written to the offset frequency memory. When `sel` is 1 and `we` is 1, data is written to the phase offset memory.
- **en:** user enable. When '1', the block is active.
- **rst:** reset. When '1', the internal memories of the block are reset.
- **sin:** sine output value.
- **cos:** cosine output value.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Function:** specifies the function(s) that the block will calculate.
- **Negative sine:** negates the sine output.
- **Negative cosine:** negates the cosine output.
- **Output Frequency Type:** specifies the output frequency to be either constant or register. Choice of register activates optional ports on the block.
- **Output frequency array (MHz):** for each channel, an independent frequency can be entered into an array.
- **Phase Offset Type:** specifies phase offset to be Constant, Register, or None. Choice of register activates optional ports on the block.
- **Phase offset angle array:** for each channel, an independent offset can be entered into an array. The entered values will be multiplied by 2π radians.
- **Provide channel port:** provide an output channel port to indicate which channel the current output sample corresponds to.

Advanced tab

Parameters specific to the DDS block on the Advanced tab are as follows:

- **DDS clock rate (MHz):** frequency at which the DDS core will be clocked.
- **Spurious free dynamic range (dB):** defines the frequency domain requirements of the out-of-band noise generated by the DDS outputs. The range is from 16 to 115 dB of spur suppression. Note that an SFDR value of 102 dB or greater will force an

implementation to employ a Taylor Series Correction which requires the use of embedded multipliers.

- **Frequency resolution (Hz):** determines the granularity of the tuning frequency.
- **Accumulator latency:** specifies the latency in the phase accumulator to be zero or one.
- **Noise Shaping:** determines whether a phase truncation, dithered DDS, or Taylor series corrected DDS implementation is generated

Implementation tab

- Parameters specific to the Implementation tab are as follows:
- **Memory type:** directs the block to be implemented either with distributed or block RAM.
- **Pipeline for maximum performance:** when checked, the implementation is fully pipelined.

When noise shaping or memory type is set to auto, the following table shows how the setting of the spurious free dynamic range affects the setting of these parameters.

SFDR	Noise Shaping	Memory Type
<=36	None	Distributed Memory
<=48	Phase Dithering	Distributed Memory
<=60	none	Block RAM
<=102	Phase Dithering	Block RAM
<=115	Taylor Series Corrected	Block RAM

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the Xilinx LogiCORE™ DDS v5.0.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
DDS v5_0	DDS	V5.0	•	•			•	•	•	


Delay

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Memory, and Index.



The Xilinx Delay block implements a fixed delay of L cycles.

The delay value is displayed on the block in the form z^{-L} , which is the Z-transform of the block's transfer function. Any data provided to the input of the block will appear at the output after L cycles. The rate and type of the data of the output will be inherited from the input. This block is used mainly for matching pipeline delays in other portions of the circuit. The delay block differs from the register block in that the register allows a latency of only 1 cycle and contains an initial value parameter. The delay block supports a specified latency but no initial value other than zeros. The figure below shows the **Delay** block behavior when $L=4$ and **Period**=1s.

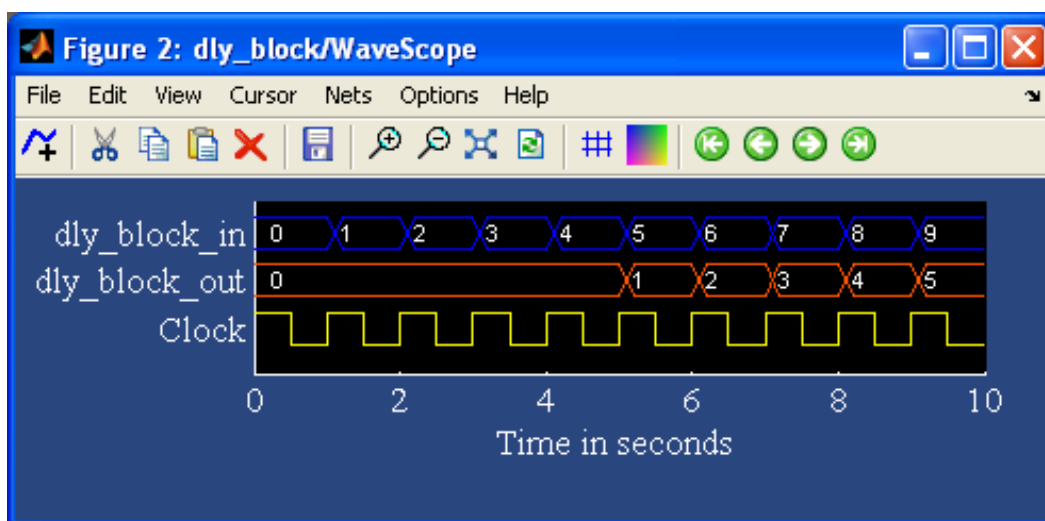

For delays that need to be adjusted during run-time, you should use the **Addressable Shift Register** block. Delays that are not an integer number of clock cycles are not supported and such delays should not be used in synchronous design (with a few rare exceptions).

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- Latency:** Latency is the number of cycles of delay. The latency may be zero, provided that the **Provide enable port** checkbox is not checked. The latency must be a non-negative integer. If the latency is zero, the delay block collapses to a wire during logic synthesis. If the latency is set to $L=1$, the block will generally be synthesized as a flip flop (or multiple flip flops if the data width is greater than 1).

Implementation tab

Parameters specific to the Implementation tab are as follows:


- Implement using behavioral HDL:** uses behavioral HDL as the implementation. This allows the downstream logic synthesis tool to choose the best implementation. Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Logic Synthesis using Behavioral HDL

This setting is recommended if you are using Synplify Pro as the downstream logic synthesis tool. The logic synthesis tool will implement the delay as it desires, performing optimizations such as moving parts of the delay line back or forward into blockRAMs, DSP48s, or embedded IOB flip flops; employing the dedicated SRL cascade outputs for long delay lines based on the architecture selected; and using flip flops to terminate either or both ends of the delay line based on path delays. Using this setting also allows the logic synthesis tool, if sophisticated enough, to perform retiming by moving portions of the delay line back into combinational logic clouds.

Logic Synthesis using Structural HDL


If you do not check the box **Implement using behavioral HDL**, then structural HDL will be used. This is the default setting and results in a known, but less-flexible, implementation which is often better for use with XST. In general, this setting produces structural HDL comprising an SRL (Shift-Register LUT) delay of (L-1) cycles followed by a flip flop, with the SRL and the flip flop getting packed into the same slice. For a latency greater than L=17, multiple SRL/flip flop sets will be cascaded, albeit without using the dedicated cascade routes. For example, the following is the synthesis result for a 1-bit wide delay block with a latency of L=32:

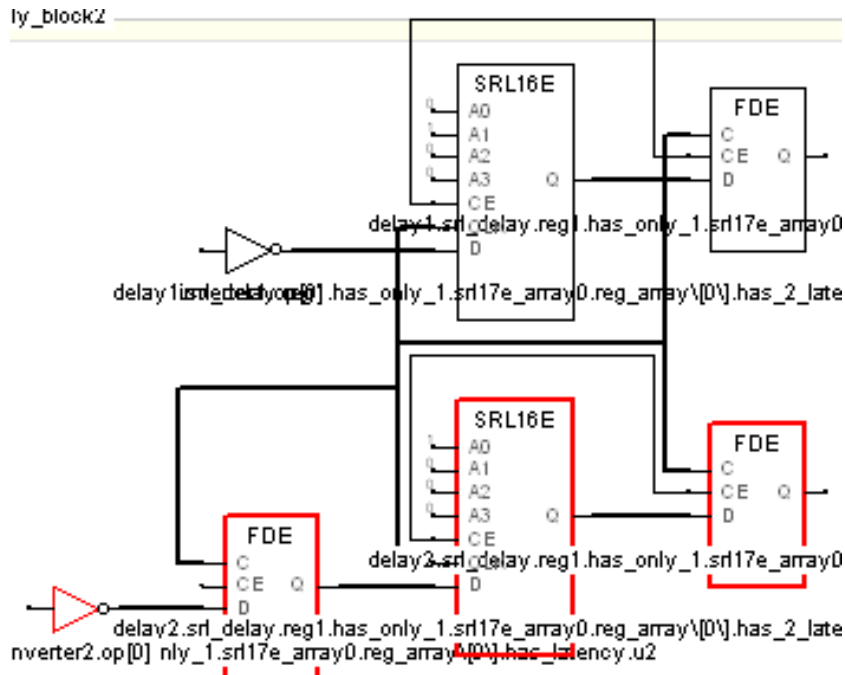

The first SRL provides a delay of 16 cycles and the associated flip flop adds another cycle of delay. The second SRL provides a delay of 14 cycles; this is evident because the address is set to {A3,A2,A1,A0}=1101 (binary) = 13, and the latency through an SRL is the value of the address plus one. The last flip flop adds a cycle of delay, making the grand total $L=16+1+14+1=32$ cycles.


The SRL is an efficient way of implementing delays in the Xilinx architecture. An SRL and its associated flip flop that comprise a single *logic cell* can implement seventeen cycles of delay whereas a delay line consisting only of flip flops can implement only one cycle of delay per logic cell.

The SRL has a setup time that is longer than that of a flip flop. Therefore, for very fast designs with a combinational path preceding the delay block, it may be advantageous, when using the structural HDL setting, to precede the delay block with an additional delay block with a latency of $L=1$. This ensures that the critical path is not burdened with the long setup time of the SRL. An example is shown below.

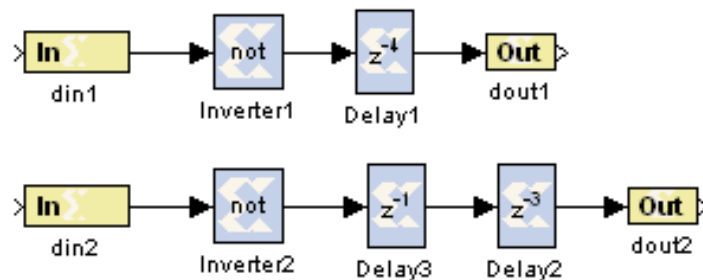

These designs are logically equivalent, but the bottom one will have a faster hardware implementation. The bottom design will have the combinational path formed by *Inverter2* terminated by a flipflop, which has a shorter setup time than an SRL.


The synthesis results of both designs are shown below, with the faster design highlighted in red:

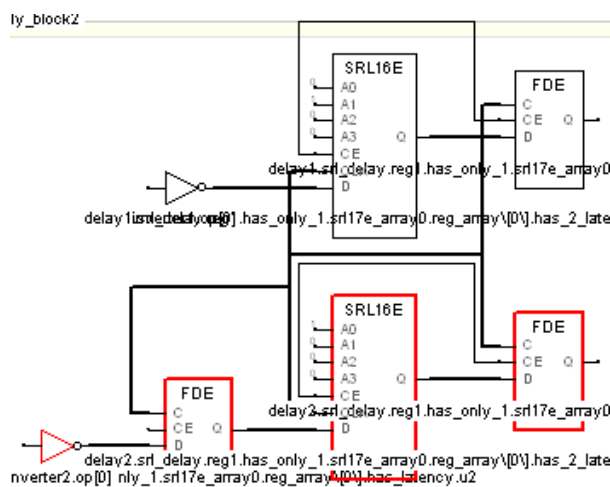

Note that an equivalent to the faster design results from setting the latency of *Inverter2* to 1 and eliminating *Delay3*. This, however, is not equivalent to setting the latency of *Inverter2* to 4 and eliminating the delay blocks; this would yield a synthesis equivalent to the upper (slower) design.

Implementing Long Delays

For very long delays, of, say, greater than 128 cycles, especially when coupled with larger bus widths, it may be better to use a block-RAM-based delay block. The delay block is implemented using SRLs, which are part of the general fabric in the Xilinx. Very long delays should be implemented in the embedded block RAMs to save fabric. Such a delay exploits the dual-port nature of the blockRAM and can be implemented with a fixed or run-time-variable delay. Such a block is basically a block RAM with some associated address counters. The model below shows a novel way of implementing a long delay using LFSRs (linear feedback shift registers) for the address counters in order to make the design faster, but conventional counters may be used as well. The difference in value between the counters (minus the RAM latency) is the latency *L* of the delay line.

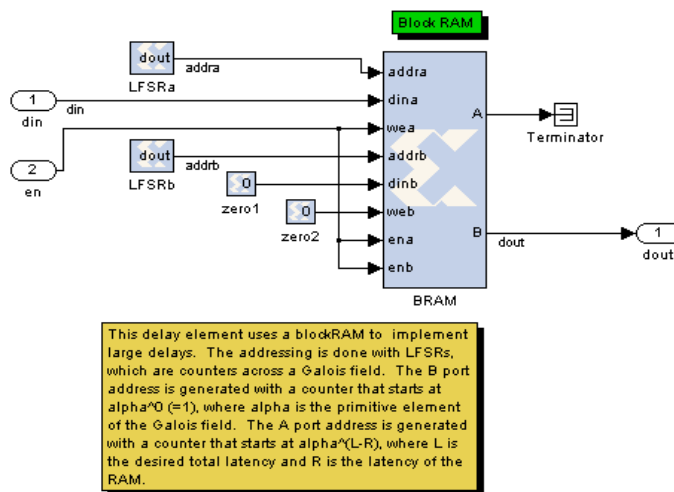

Re-settable Delays and Initial Values

If a delay line absolutely must be re-settable to zero, this can be done by using a string of L register blocks to implement the delay or by creating a circuit that forces the output to be zero while the delay line is “flushed”.


The delay block doesn’t support initial values, but the **Addressable Shift Register** block does. This block, when used with a fixed address, is generally equivalent to the delay block and will synthesize to an SRL-based delay line. The initial values pertain to initialization only and not to a reset. If using the addressable shift register in “structural HDL mode” (e.g., the **Use behavioral HDL** checkbox is not selected) then the delay line will not be terminated with a flip flop, making it significantly slower. This can be remedied by using behavioral mode or by putting a **Register** or **Delay** block after the addressable shift register.

Xilinx LogiCORE

The Delay block does not use a Xilinx LogiCORE™, but is efficiently mapped to utilize the SRL16 feature of Xilinx devices.

Depuncture


This block is listed in the following Xilinx Blockset libraries: Communication and Index.



The Xilinx Depuncture block allows you to insert an arbitrary symbol into your input data at the location specified by the depuncture code.

The Xilinx depuncture block accepts data of type $U\text{Fix}_N_0$ where N equals the length of insert string x (the number of ones in the depuncture code) and produces output data of type $U\text{Fix}_K_0$ where K equals the length of insert string multiplied by the length of the depuncture code.


The Xilinx Depuncture block can be used to decode a range of punctured convolution codes. The following diagram illustrates an application of this block to implement soft decision Viterbi decoding of punctured convolution codes.

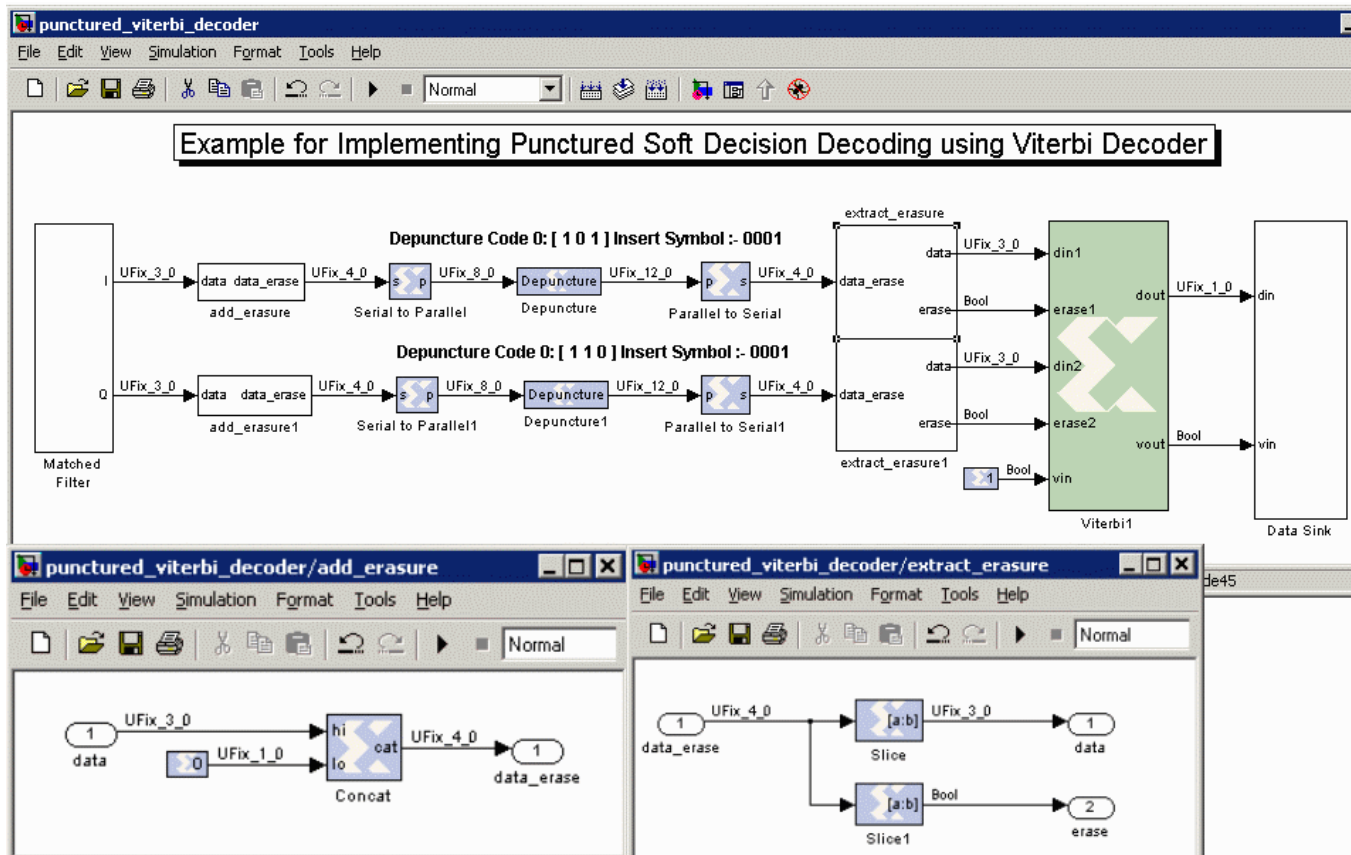

The previous diagram shows a matched filter block connected to a add_erase subsystem which attaches a 0 to the input data to mark it as a non-erasure signal. The output from the add_erase subsystem is then passed to a serial to parallel block. The serial to parallel block concatenates two continuous soft inputs and presents it as a 8-bit word to the depuncture block. The depuncture block inserts the symbol '0001' after the 4-bits from the MSB for code 0 ([1 0 1]) and 8-bits from the MSB for code 1 ([1 1 0]) to form a 12-bit word. The output of the depuncture block is serialized as 4-bit words using the parallel to serial block. The extract_erase subsystem takes the input 4-bit word and extracts 3-bits from the MSB to form a soft decision input data word and 1-bit from the LSB to form the erasure signal for the Viterbi decoder.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

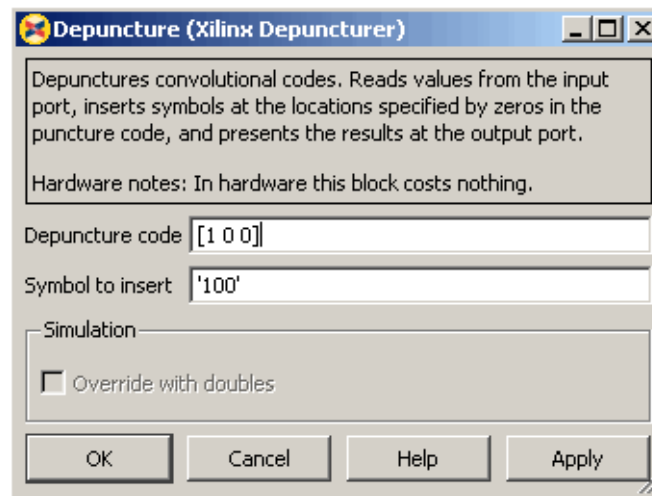

Parameters specific to the Xilinx Depuncturer block are:

- **Depuncture code:** specifies the depuncture pattern for inserting the string to the input.
- **Symbol to insert:** specifies the binary word to be inserted in the depuncture code.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Disregard Subsystem

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



This block has been deprecated since System Generator version 6.2.


The block may be eliminated in a future version of System Generator. The functionality supplied by this block is now available through System Generator's support for Simulink's configurable subsystem which is discussed in the topic [Configurable Subsystems and System Generator](#). Configurable subsystems offer several advantages over the Disregard Subsystem block.

The Disregard Subsystem block can be placed into any subsystem of your model to indicate that you do not wish System Generator to generate hardware for that subsystem. This block can be used in combination with the simulation multiplexer block to build alternative simulation models for a portion of a design, for example, to provide a simulation model for a black box.

This block has no parameters.

Divider Generator 2.0

This block is listed in the following Xilinx Blockset libraries: *DSP, Math, and Index*.



The Xilinx Divider Generator 2.0 block creates a circuit for integer division based on Radix-2 non-restoring division, or High-Radix division with prescaling.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are:

Common Options

- **Dividend and quotient width:** (integer) 2 to 32 (Radix-2). 2 to 54 (High Radix). Specifies the width of both dividend and quotient.
- **Divisor width:** (integer): 2 to 32 (Radix-2). 2 to 54 (High Radix).
- **Algorithm Type:**
 - ♦ **Radix-2** non-restoring integer division using integer operands, allows a remainder to be generated. This is recommended for operand widths less than around 16 bits. This option supports both **unsigned** and **signed** (2's complement) divisor and dividend inputs.
 - ♦ **High Radix** division with prescaling. This is recommended for operand widths greater than 16 bits, though the implementation requires the use of DSP48 (or variant) primitives. This option only supports **signed** (2's complement) divisor and dividend inputs.
- **Remainder type:**
 - ♦ **Remainder:** Only supported for Radix 2.
 - ♦ **Fractional:** Determines the number of bits in the fractional port output.
- **Fractional Width:** If Fractional Remainder type is selected, this entry determines the number of bits in the fractional port output.

Radix2 Options

- **Clocks per division:** Determines the interval in clocks between new data being input (and output).

High Radix Options

- **Detect divide by zero:** Determines if the core shall have a division-by-zero indication output port.
- **Latency configuration:** *Automatic* (fully pipelined) or *Manual* (determined by following field).

- **latency:** This field determines the exact latency from input to output in terms of clock enabled clock cycles.

Optional Ports

- **en:** Add enable port
- **rst:** Add reset port.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Xilinx LogiCORE

This block uses the Xilinx LogiCORE™ Divider v2.0.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Divider Generator 2.0	Divider v2.0	V2.0		•	•	•		•	•	•

Down Sample


This block is listed in the following Xilinx Blockset libraries: Basic Elements and Index.



The Xilinx Down Sample block reduces the sample rate at the point where the block is placed in your design.

The input signal is sampled at even intervals, at either the beginning (first value) or end (last value) of a frame. The sampled value is presented on the output port and held until the next sample is taken.


A Down Sample frame consists of l input samples, where l is sampling rate. An example frame for a Down Sample block configured with a sampling rate of 4 is shown below.

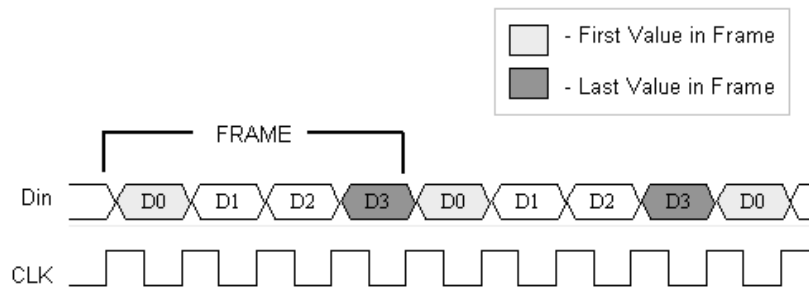

The Down Sample block is realized in hardware using one of three possible implementations that vary in terms of implementation efficiency. The block receives two clock enable signals in hardware, *Src_CE* and *Dest_CE*. *Src_CE* is the faster clock enable signal and corresponds to the input data stream rate. *Dest_CE* is the slower clock enable, corresponding to the output stream rate, i.e., down sampled data. These enable signals control the register sampling in hardware.

Zero Latency Down Sample

The zero latency Down Sample block must be configured to sample the first value of the frame. The first sample in the input frame passes through the mux to the output port. A register samples this value during the first sample duration and the mux switches to the register output at the start of the second sample of the frame. The result is that the first sample in a frame is present on the output port for the entire frame duration. This is the least efficient hardware implementation as the mux introduces a combinational path from *Din* to *Dout*. A single bit register adjusts the timing of the destination clock enable, so that it is asserted at the start of the sample period, instead of the end. The hardware implementation is shown below:

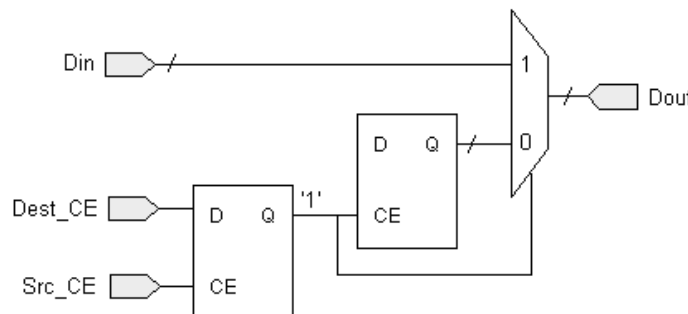


Down Sample with Latency

If the Down Sample block is configured with latency greater than zero, a more efficient implementation is used. One of two implementations is selected depending on whether the Down Sample block is set to sample the first or last value in a frame.


Sample First Value in Frame

In this case, two registers are required to correctly sample the input stream. The first register is enabled by the adjusted clock enable signal so that it samples the input at the start of the input frame. The second register samples the contents of the first register at the end of the sample period to ensure output data is aligned correctly.

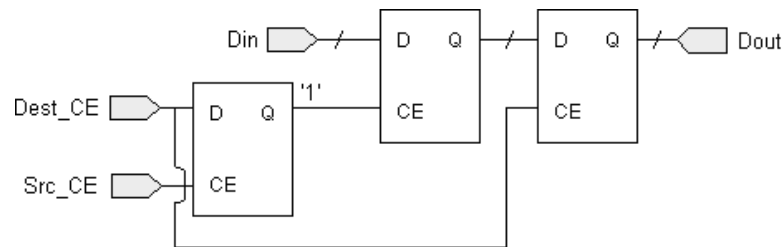

Sample Last Value in Frame

The most efficient implementation is used when the Down Sample block is configured to sample the last value of the frame. In this case, a register samples the data input data at the end of the frame. The sampled value is presented for the duration of the next frame.

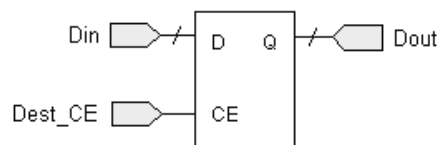

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are:

- **Sampling Rate (number of input samples per output sample):** must be an integer greater or equal to 2. This is the ratio of the output sample period to the input, and is essentially a sample rate divider. For example, a ratio of 2 indicates a 2:1 division of the input sample rate. If a non-integer ratio is desired, the Up Sample block can be used in combination with the Down Sample block.
- **Sample:** The Down Sample block can sample either the first or last value of a frame. This parameter will determine which of these two values is sampled.


Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The Down Sample block does not use a Xilinx LogiCORE™.


DSP48

This block is listed in the following Xilinx Blockset libraries: Index, DSP.



The Xilinx DSP48 block is an efficient building block for DSP applications that use Xilinx Virtex™-4 devices. The DSP48 combines an 18-bit by 18-bit signed multiplier with a 48-bit adder and programmable mux to select the adder's input.

Operations can be selected dynamically. Optional input and multiplier pipeline registers can be selected as well as registers for the subtract, carryin and opmode ports. The DSP48 block can also target devices that do not contain the DSP48 hardware primitive if the Use synthesizable model option is selected.

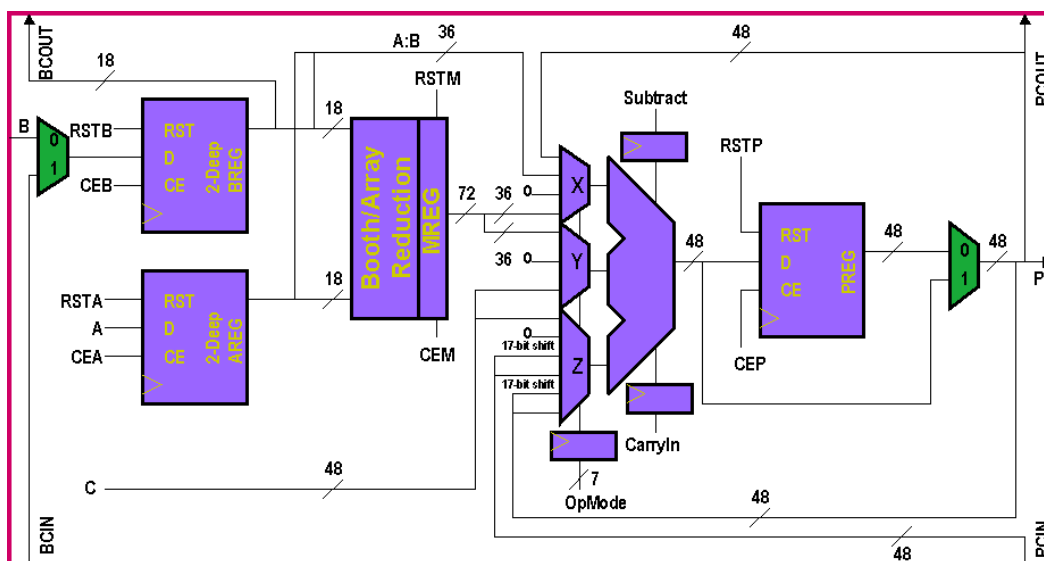

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- B or BCIN input:** specifies if the B input should be taken directly from the b port or from the cascaded bcin port. The bcin port can only be connected to another DSP48 block.
- Consolidate control port:** when selected, combines the opmode, subtract, carry_in and carry_in_sel ports into one 11-bit port. Bits 0 to 6 are the opmode, bit 7 is the subtract port, bit 8 is the carry_in port, and bits 9 and 10 are the carry_in_sel port. This option should be used when a constant block is used to generate a DSP48 instruction.

- **Provide C port:** when selected, the c port is made available. Otherwise, the c port is tied to '0'.
- **Provide PCIN port:** when selected, the pcin port is exposed. The pcin port must be connected to the pcout port of another DSP48 block.
- **Provide PCOUT port:** when selected, the pcout output port is made available. The pcout port must be connected to the pcin port of another DSP48 block.
- **Provide BCOUT port:** when selected, the bcout output port is made available. The bcout port must be connected to the bcin port of another DSP48 block.
- **Provide global reset port:** when selected, the port rst is made available. This port is connected to all available reset ports based on the pipeline selections.
- **Provide global enable port:** when selected, the optional en port is made available. This port is connected to all available enable ports based on the pipeline selections.

Pipelining

Parameters specific to the Pipelining tab are as follows:

- **Length of A pipeline:** specifies the length of the pipeline on input register A. A pipeline of length 0 removes the register on the input.
- **Length of B/BCIN pipeline:** specifies the length of the pipeline for the b input whether it is read from b or bcin.
- **Pipeline C:** indicates whether the input from the c port should be registered.
- **Pipeline P:** indicates whether the outputs p and pcout should be registered.
- **Pipeline multiplier:** indicates whether the internal multiplier should register its output.
- **Pipeline opmode:** indicates whether the opmode port should be registered.
- **Pipeline subtract:** indicates whether the subtract port should be registered.
- **Pipeline carry in:** indicates whether the carry_in port should be registered.
- **Pipeline carry in sel:** indicates whether the carry_in_sel port should be registered.

Ports tab

Parameters specific to the Ports tab are as follows:

- **Reset port for A:** when selected, a port rst_a is made available. This resets the pipeline register for port a when set to '1'.
- **Reset port for B:** when selected, a port rst_b is made available. This resets the pipeline register for port b when set to '1'.
- **Reset port for C:** when selected, a port rst_c is made available. This resets the pipeline register for port c when set to '1'.
- **Reset port for multiplier:** when selected, a port rst_m is made available. This resets the pipeline register for the internal multiplier when set to '1'.
- **Reset port for P:** when selected, a port rst_p is made available. This resets the output register when set to '1'.
- **Reset port for carry in:** when selected, a port rst_carryin is made available. This resets the pipeline register for carry in when set to '1'.
- **Reset port for controls (opmode, subtract, carry_in, carry_in_sel):** when selected, a port rst_ctrl is made available. This resets the pipeline register for the subtract

register (if available), opmode register (if available) and carry_in_sel register (if available) when set to '1'.

- **Enable port for A:** when selected, an enable port ce_a for the port A pipeline register is made available.
- **Enable port for B:** when selected, an enable port ce_b for the port B pipeline register is made available.
- **Enable port for C:** when selected, an enable port ce_c for the port C register is made available.
- **Enable port for multiplier:** when selected, an enable port ce_m for the multiplier register is made available.
- **Enable port for P:** when selected, an enable port ce_p for the port P output register is made available.
- **Enable port for carry in:** when selected, an enable port ce_carry_in for the carry in register is made available.
- **Enable port for controls (opmode, subtract, carry_in, carry_in_sel):** when selected, the enable ports ce_ctrl and ce_cinsub are made available. The port ce_ctrl controls the opmode and carry in select registers while ce_cinsub controls the subtract register.

Implementation tab

- **Use synthesizable model:** when selected, the DSP48 is implemented from an RTL description which may not map directly to the DSP48 hardware. This is useful if a design using the DSP48 block is targeted at device families that do not contain DSP48 hardware primitives.
- **Use adder only:** when selected, the block is optimized in hardware for maximum performance without using the multiplier. If an instruction using the multiplier is encountered in simulation, an error is reported.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

See Also

The following topics give valuable insight into using and understanding the DSP48 block:


[DSP48 Macro](#)

[Generating Multiple Cycle-True Islands for Distinct Clocks](#)

[Xilinx XtremeDSP™](#)

DSP48 Macro

This block is listed in the following Xilinx Blockset libraries: Index, Control.



The System Generator DSP48 Macro block provides a device independent abstraction of the blocks DSP48, DSP48A, and DSP48E. Using this block instead of using a technology-specific DSP slice helps makes the design more portable between Xilinx technologies.

Depending on the target technology specified at compile time, the block wraps one DSP48/DSP48E/DSP48A block along with reinterpret and convert blocks for data type alignment, multiplexers to handle multiple opmodes and inputs, and registers.

Note: In the remainder of the text on this block, DSP/DSP48A/DSP48E will be collectively referred to as XtremeDSP slice.

Block Interface

The DSP48 Macro block has a variable number of inputs and outputs determined from user-specified parameter values. The input data ports are determined by the opmodes entered in the Instructions field of the DSP48 Macro. Input port Sel appears if more than one opmode is specified in the Instructions field. The Instructions field is discussed in greater detail in the topic on Entering Opmodes in the DSP48 Macro block.

Port P, an output data port, is the only port appearing in all configurations of the DSP48 Macro. Output ports PCOUT, BCOUT, ACOUT, CARRYOUT, and CARRYCASCOUT appear depending on the user-selections.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are:

- **Inputs to Port A:** This field specifies symbolic port identifiers or operands appearing in the Instructions field as connected to port A or port A:B on the XtremeDSP slice.
- **Inputs to port B:** This field specifies symbolic port identifiers or operands appearing in the Instructions field as connected to port B.
- **Inputs to port C:** This field specifies symbolic port identifiers or operands appearing in the Instructions field as connected to port C.
- **Instructions:** This field specifies instructions for the Macro. Refer to the topic on [Entering Opmodes in the DSP48 Macro Block](#).

Pipelining tab

- **Pipeline Options:** This field specifies the pipelining options on the XtremeDSP slice and latency on the data presented to each port of the XtremeDSP slice. Available options include 'External Registers', 'No External Registers' and 'Custom'. When 'External Registers' is selected multiplexer outputs (underneath DSP48 Macro) are registered (this allows high speed operation). If the DSP48 Macro configures the XtremeDSP slice as an adder only (inferred from the operations entered in the

instructions field), then the latency is 3 else the latency is 4. When 'No External Registers' is selected, multiplexer outputs are not registered and the latency of the DSP48 Macro becomes two. When 'Custom' is selected all register instances inside and outside of the XtremeDSP slice are inferred from the Custom Pipeline Options. If the Instructions require the use of the XtremeDSP slice as adder and multiplier then it must be configured to use Custom Pipeline Option.

- **Custom Pipeline Options:** This group of controls is active only when Pipeline Options is set to Custom. Provides individual control for instantiating the XtremeDSP slice and multiplexer registers.
- **Custom Pipeline Options([A,B,C,P,Ctrl,M,MuxA,MuxB,MuxC,MuxCtrl]):** This field enables you to specify Custom Pipeline Options as an array of integers.

Ports tab

The Ports tab consists of controls to expose the BCOUT, ACOUT, CARRYOUT, CARRYCASCOUT, PCOUT and the various XtremeDSP slice Reset and Enable Ports.

Implementation tab

- **Use DSP48:** This field tells System Generator to use the XtremeDSP Slice on Virtex™-4, Virtex-5 or Spartan™-3A DSP, which ever is the target technology. If unchecked, a synthesizable model of the XtremeDSP slice is used that can be used in other devices.

Entering Opmodes in the DSP48 Macro Block


The DSP48 is capable of performing different arithmetic operations on input data depending on the input to its opmode port; this capability enables the DSP48 to operate like a dynamic operator unit. The DSP48 Macro simplifies using the DSP48 as a dynamic operator unit. It orders multiple operands and opmodes with multiplexers and appropriately aligns signals on the data ports. The ordering of operands and opmode execution is determined by the order of opmodes entered in the Instructions field. The Instructions field must contain at least one opmode and a maximum of eight opmodes. This topic details all the issues involved with entering opmodes in the Instructions field of the DSP48 Macro.

Opmode Format


A newline character is used to separate two different opmodes. Each opmode must strictly adhere to the rules listed below:

- Each opmode is an assignment to P and must begin with 'P='
- The expression following the assignment operator('=') must be entirely made up of +/-/ * operators and symbolic port identifiers (see Operand Format) for operands.
- Only opmodes that can be implemented on the DSP48 are legal. A list of opmodes supported on the DSP48 Macro is provided in Table 2.

Consider the simple model shown below. The DSP48 Macro has three inputs defined as Xo, Yo, and Zo. Because more than one Instruction opcode is specified in block dialog box, the Sel input port is automatically added:

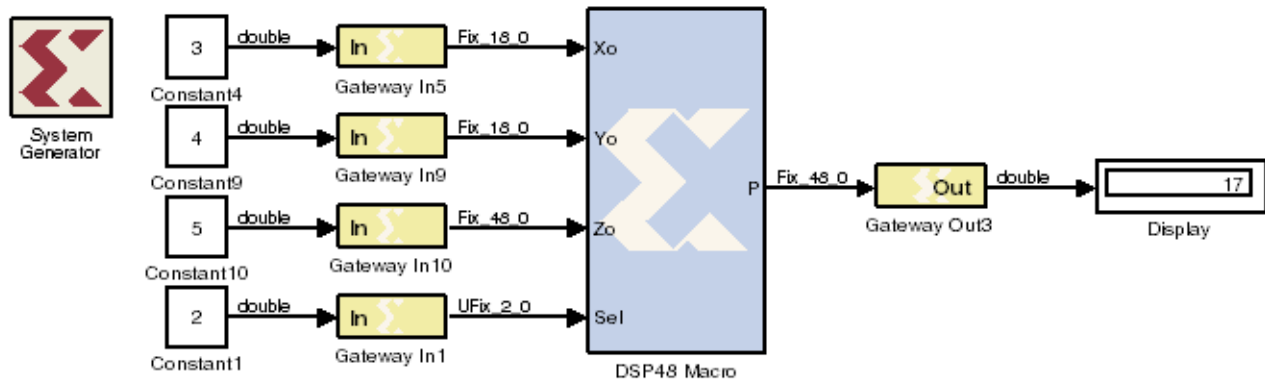

The figure below shows the DSP48 Macro dialog box for the above diagram. Three legal opcodes are entered in the Instructions field.

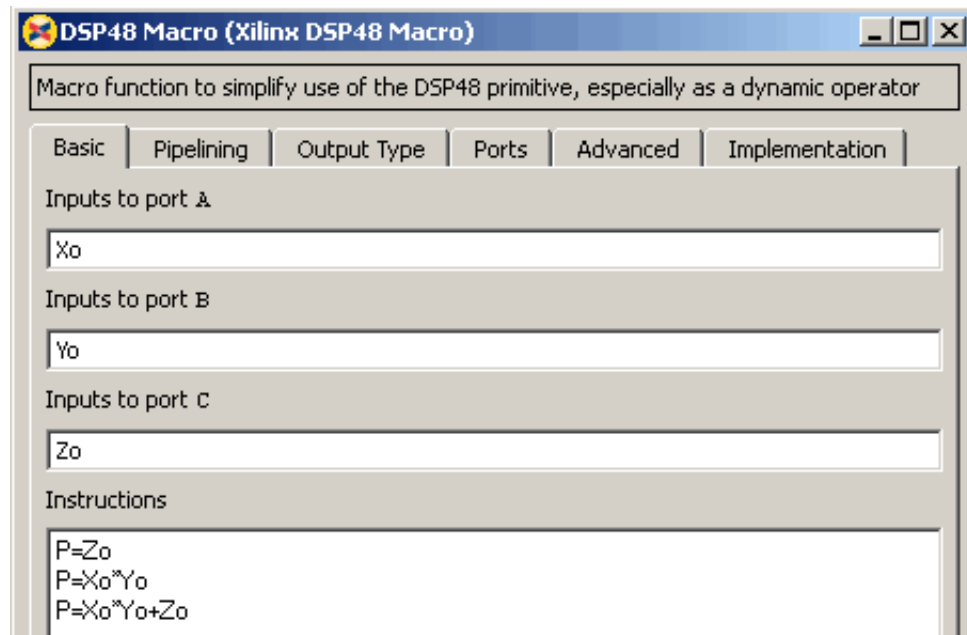

When 0 is specified on the Sel input, the first instruction opcode is implemented. The value on Zo is feed directly to output P. In this example, 5 will appear at the output.

When 1 is specified on Sel, the second Instruction opcode ($Xo * Yo$) is implemented. In this case, the number 12 will appear at the output.

When 2 is specified on Sel, the third instruction ($Xo * Yo + Zo$) is implemented and the output in this case goes to the number 17.

When this design is compiled, if the target technology is Virtex™-4, then a DSP48 slice will be netlisted. If Virtex-5 is specified, then a DSP48E slice will be netlisted, and if the Spartan™-3A DSP technology is specified, then a DSP48A slice will be used in the implementation.

Operand Format

Each operand (symbolic port identifier) used in an opmode must follow the rules listed below:

- Each symbolic port identifier must begin with an alphabet[a-z,A-Z] and can be followed by any number of alphanumeric characters or underscore('_').
- The symbolic port identifiers must not match any of the reserved port identifiers listed in Table 1 irrespective of case
- Each of the symbolic port identifiers must be listed once and only once in the Inputs to Port A, Port B, or Port C fields. Multiple symbolic port identifiers in the same list must be separated using a space or ';'.

In the figure above, Xo, Yo, and Zo are the symbolic port identifiers. Examples of legal symbolic port identifiers/operands are a1, signal_1, delayed_signal etc. Examples of illegal symbolic port identifiers include Cin, _port1, delay\$%, 12signal etc.

Reserved Port Identifiers.

Reserved Port Identifier	Port Type	Memory Type
PCIN	Input. Connected to port PCIN on the DSP48	This port appears depending on the opmode used. Refer to Table 2, Opmodes 0x10-0x1f use the PCIN Inport. The PCIN port must be connected to the PCOUT port of another DSP48 block/DSP48 Macro block.
BCIN	Input. Connected to port BCIN on the DSP48	This port appears if in any of the opmodes listed in Table 2, B(not A:B) is replaced with BCIN. Must be connected to the BCOUT port of another DSP48 block/DSP48 Macro block.
PCIN>>17	Input. Connected to port PCIN on the DSP48	Refer to Table 2. Opmodes 0x50-0x5f use this port identifier. PCIN, is right shifted by 17 and input to the DSP48 adder through DSP48's z multiplexer.
CIN	Input. Connected to port carry_in on the DSP48	This port appears if the opmode contains Cin. Refer to Table 2. Optional on all opmodes except 0x00.

Reserved Port Identifier	Port Type	Memory Type
PCOUT	Output. Connected to port PCOUT on the DSP48	This port appears if PCOUT on the Ports tab is selected.
ACOUT	Output. Connected to port ACOUT on the DSP48	This port appears if ACOUT on the Ports tab is selected.
BCOUT	Output. Connected to port BCOUT on the DSP48	This port appears if BCOUT on the Ports tab is selected.
rst_all	Input. Connected to rst on the DSP48 as well as all registers' reset	This port appears if Global Reset on the Ports tab is selected.
ce_all	Input. Connected to en on the DSP48 as well as all registers' enable	This port appears if 'Global Enable' on the ports tab is selected.
Sel	Input	Appears only when more than one opmode instruction is specified in the Instructions field. Used to select an opmode from the list of opmodes in the Instructions field.
P	Output	Always present.
P>>17	-	Refer to Table 2. Opmodes 0x60-0x6f. P, right shifted by 17 is input to the DSP48 adder through the DSP48's z multiplexer.


Opmode Selection

As stated previously, if more than one opmode is specified in the Instructions field, opmode selection must be provided by the block. This is achieved through the use of the 'Sel' port that appears when there is more than one opmode in the Instructions field. The 'Sel' port is connected to multiplexers instanced underneath the mask; any signal connected to the Sel port must be of the appropriate data type. The value of the Sel signal for each opmode listed in the Instructions field corresponds to the position of the opmode. The first position is position 0, then second position is 1, and so on.

Using Reserved Identifiers

There are two categories of reserved identifiers. Reserved identifiers that manifest as ports on the DSP48 Macro block and reserved identifiers that do not. Descriptions and usage of each of the reserved word identifiers is listed in the Table above. An example of using

PCIN and BCIN reserved words is depicted in the following figure. The Instructions are:
 $P = PCIN + A * BCIN$

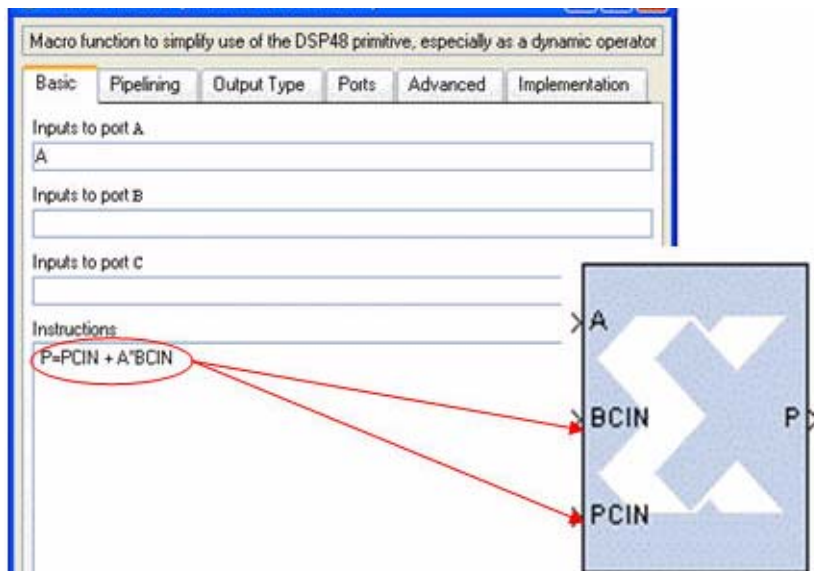

Mode Selection

The DSP48 Macro can be operated in two modes: Adder Mode and Multiplier Mode. Mode selection depends on the DSP48 Macro opmodes used; the opmodes supported by each of the modes is listed in Table 2. When A and B ports are routed as inputs to the DSP48's adder, they are concatenated as one signed 36-bit input (refer to the DSP48 documentation). The DSP48's multiplier interprets the ports as two disjoint signed 2's complement 18-bit inputs.

DSP48 Opmodes

In the following table, Cin is optional in all the Opmodes. A:B refers to all the symbolic port identifiers in 'Inputs to Port A' field of DSP48 Macro block mask supplying inputs to the Adder of DSP48 block. Symbols A, B, and C refer to symbolic identifiers in Inputs to Port A, Port B and Port C fields respectively. All other symbols are reserved (refer to Reserved Port Identifier table above for more details).

DSP48 Macro Pseudo Opmode	DSP48 Macro Mode	Supported for DSP48	Supported for DSP48E	Supported for DSP48A
$P = Cin$ $P = +Cin$ $P = -Cin$	----	Yes	Yes	Yes
$P = P + Cin$ $P = -P - Cin$	----	Yes	Yes	Yes
$P = A:B + Cin$	Adder	Yes	Yes	Yes
$P = A * B + Cin$ $P = -A * B - Cin$	Multiplier	Yes	Yes	Yes
$P = C + Cin$ $P = -C - Cin$	----	Yes	Yes	Yes

DSP48 Macro Pseudo Opmode	DSP48 Macro Mode	Supported for DSP48	Supported for DSP48E	Supported for DSP48A
$P = +C + P + Cin$ $P = -C - P - Cin$	----	Yes	Yes	Yes
$P = A:B + C + Cin$ $P = -A:B - C - Cin$	Adder	Yes	Yes	Yes
$P = PCIN + Cin$ $P = PCIN - Cin$	----	Yes	Yes	Yes(A:B + C + Cin only)
$P = PCIN + P + Cin$ $P = PCIN - P - Cin$	----	Yes	Yes	Yes
$P = PCIN + A:B + Cin$ $P = PCIN - A:B - Cin$	Adder	Yes	Yes	Yes
$P = PCIN + A * B + Cin$ $P = PCIN - A * B - Cin$	Multiplier	Yes	Yes	Yes
$P = PCIN + C + Cin$ $P = PCIN - C - Cin$	----	Yes	Yes	No
$P = PCIN + C + P + Cin$ $P = PCIN - P - C - Cin$	----	Yes	Yes	No
$P = PCIN + A:B + C + Cin$ $P = PCIN - A:B - C - Cin$	Adder	Yes	Yes	No
$P = P - Cin$	----	Yes	Yes	Yes
$P = P + P + Cin$ $P = P - P - Cin$	----	Yes	Yes	Yes
$P = P - A:B - Cin$ $P = P + A:B + Cin$	Adder	Yes	Yes	Yes
$P = P + A * B + Cin$	Multiplier	Yes	Yes	Yes
$P = P + C + Cin$ $P = P - C - Cin$	----	Yes	Yes	No
$P = P + C + P + Cin$ $P = P - C - P - Cin$	----	Yes	Yes	No
$P = P + C + P + Cin$ $P = P - C - P - Cin$	Adder	Yes	Yes	No
$P = C - Cin$	----	Yes	Yes	Yes
$P = C - P - Cin$	----	Yes	Yes	Yes
$P = C - A:B - Cin$	Adder	Yes	Yes	Yes
$P = C - A * B - Cin$	Multiplier	Yes	Yes	Yes
$P = C + C + Cin$ $P = C - C - Cin$	----	Yes	Yes	No

DSP48 Macro Pseudo Opmode	DSP48 Macro Mode	Supported for DSP48	Supported for DSP48E	Supported for DSP48A
$P=C+C+P+Cin$ $P=C-C-P-Cin$	----	Yes	Yes	No
$P=PCIN>>17+Cin$, $P=PCIN>>17Cin$	----	Yes	Yes	No
$P=PCIN>>17+P+Cin$ $P=PCIN>>17-P-Cin$	----	Yes	Yes	No
$P=PCIN>>17+A:B+Cin$ $P=PCIN>>17-A:B-Cin$	Adder	Yes	Yes	No
$P=PCIN>>17+A*B+Cin$ $P=PCIN>>17-A*B-Cin$	Multiplier	Yes	Yes	No
$P=PCIN>>17+C+Cin$ $P=PCIN>>17-C-Cin$	----	Yes	Yes	No
$P=PCIN>>17+P+C+Cin$ $P=PCIN>>17-P-C-Cin$	----	Yes	Yes	No
$P=PCIN>>17+C+A:B+Cin$ $P=PCIN>>17-C-A:B-Cin$	Adder	Yes	Yes	No
$P=P>>17+Cin$ $P=P>>17-Cin$	----	Yes	Yes	No
$P=P>>17+P+Cin$ $P=P>>17-P-Cin$	----	Yes	Yes	No
$P=P>>17+A:B+Cin$ $P=P>>17-A:B-Cin$	Adder	Yes	Yes	No
$P=P>>17+A*B+Cin$ $P=P>>17-A*B-Cin$	Multiplier	Yes	Yes	No
$P=P>>17+C+Cin$ $P=P>>17-C-Cin$	----	Yes	Yes	No
$P=P>>17+P+C+Cin$ $P=P>>17-P-C-Cin$	----	Yes	Yes	No
$P=P>>17+C+A:B+Cin$ $P=P>>17-C-A:B-Cin$	Adder	Yes	Yes	No

Entering Pipeline Options and Editing Custom Pipeline Options

Since the data paths for the A, B and C ports are different and can have a different number of registers, time-alignment issues arise. Control signals also suffer from the same issue. This makes the pipeline model extremely important. There are three pipeline options available in the DSP48 Macro block mask. These include 'External Registers', 'No External Registers' and 'Custom'.

External Registers

This option aligns all the control and data signals by also using additional registers external to the DSP48 block. These external registers are required to register the output of the multiplexers to ensure high-speed operation. If all the opmodes entered into the DSP48 Macro instructions field are such that, they require the use of multiplier, then the latency on the DSP48 Macro is 4. If none of the instructions on the DSP48 Macro require the use of the multiplier, the latency on the DSP48 Macro is 3.

No External Registers

This option aligns all the control and data signals without using registers external to the DSP48 block. The MREG is not selected in this mode. The latency of the DSP48 Macro is 2.

Custom

This option gives you control over instancing each register of the DSP48 Macro block. When this option is selected the 'Custom Pipeline Options' group of controls becomes active and each of the individual registers can be selected. When the DSP48 Macro contains instructions that require using the multiplier in the DSP48 and the Adder with A:B as one of the inputs, Custom pipeline is the only legal option.

DSP48 Macro Limitations

Though the DSP48 Macro eases the use of the DSP 48 block it is not without limitations:

- It does not support the DSP48's rounding features
- It supports carry-in only from fabric
- It does not support all input data types. Input data types that exceed the data type restrictions of a single DSP48 are not supported currently. For example if, after alignment of inputs, the input to Port A of DSP48 exceeds 18bits then it will result in an error

See Also

The following topics give valuable insight into using and understanding the DSP48 block:


[DSP48 block](#)

[Generating Multiple Cycle-True Islands for Distinct Clocks](#)

[Xilinx XtremeDSP™](#)

DSP48A


This block is listed in the following Xilinx Blockset libraries: Index, DSP.



DSP48A

The Xilinx DSP48A block is an efficient building block for DSP applications that use Xilinx Spartan-3A DSP devices. For those familiar with the DSP48 and the DSP48E, the DSP48A is a 'light' version of primitive.

Key features for the DSP48A are a dedicated C-port and pre-adder. The DSP48A combines an 18-bit by 18-bit signed multiplier with a 48-bit adder and programmable mux to select the adder's input. Operations can be selected dynamically. Optional input and multiplier pipeline registers can be selected as well as registers for the subtract, carryin and opmode ports. The DSP48A block can also target devices that do not contain the DSP48A hardware primitive if the **Use synthesizable model** option is selected.

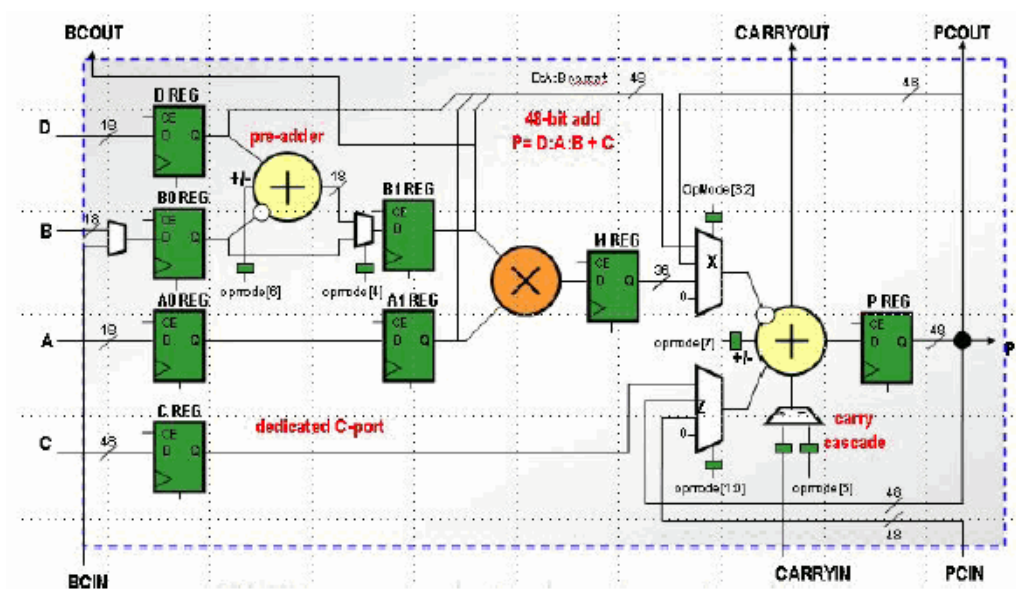

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are:

- **Consolidate control port (opmode, carry_in, preadd select, preadd subtract):** when selected, combines the opmode, subtract, preadd select and preadd subtract ports into one 8-bit port. Bits 0 to 3 are the opmode, bit 4 is the pre-add select port, bit 5 is the carry_in (if the carry_in is set to direct), bit 6 is the pre-adder subtract port, and bit 7 is the subtract port. This option should be used when the opmode block is used to generate a DSP48A instruction.
- **Provide C port:** when selected, the c port is made available. Otherwise, the c port is tied to '0'.

- **Provide D port:** when selected, the `d` port is made available. Otherwise, the `d` port is tied to '0'.
- **Provide PCIN port:** when selected, the `pcin` port is exposed. The `pcin` port must be connected to the `pcout` port of another DSP48A block.
- **Provide PCOUT port:** when selected, the `pcout` output port is made available. The `pcout` port must be connected to the `pcin` port of another DSP48A block.
- **Provide BCOUT port:** when selected, the `bcout` output port is made available. The `bcout` port must be connected to the `b` port of another DSP48A block.
- **Provide CARRYIN port:** when selected, the `carryin` port is made available.
- **Provide CARRYOUT port:** when selected, the `carryout` port is made available. The `carryout` port must be connected to the `carryin` port of another DSP48A block.
- **Provide global reset port:** when selected, the port `rst` is made available. This port is connected to all available reset ports based on the pipeline selections.
- **Provide global enable port:** when selected, the port `en` is made available. This port is connected to all available enable ports based on the pipeline selections.

Pipelining tab

Parameters specific to the Pipelining tab are:

- **Use A0 reg:** indicates whether the A0 reg should be used.
- **Use A1 reg:** indicates whether the A1 reg should be used.
- **Use B0 reg:** indicates whether the B0 reg should be used.
- **Use B1 reg:** indicates whether the B1 reg should be used.
- **Pipeline C:** indicates whether the input from the `c` port should be registered.
- **Pipeline D:** indicates whether the input from the `d` port should be registered.
- **Pipeline multiplier:** indicates whether the internal multiplier should register its output.
- **Pipeline P:** indicates whether the outputs `p` and `pcout` should be registered.
- **Pipeline opmode:** indicates whether the `opmode` port should be registered.
- **Pipeline carry in:** indicates whether the `carry_in` port should be registered.

Ports tab

Parameters specific to the Ports tab are:

- **Reset port for A:** when selected, a port `rst_a` is made available. This resets the pipeline register for port `a` when set to '1'.
- **Reset port for B:** when selected, a port `rst_b` is made available. This resets the pipeline register for port `b` when set to '1'.
- **Reset port for D:** when selected, a port `rst_d` is made available. This resets the pipeline register for port `c` when set to '1'.
- **Reset port for C:** when selected, a port `rst_c` is made available. This resets the pipeline register for port `c` when set to '1'.
- **Reset port for multiplier:** when selected, a port `rst_m` is made available. This resets the pipeline register for the internal multiplier when set to '1'.
- **Reset port for P:** when selected, a port `rst_p` is made available. This resets the output register when set to '1'.

- **Reset port for opmode:** when selected, a port `rst_opmode` is made available. This resets the pipeline register for the opmode port when set to '1'.
- **Reset port for carry in:** when selected, a port `rst_carryin` is made available. This resets the pipeline register for carry in when set to '1'.
- **Enable port for A:** when selected, an enable port `ce_a` for the port A pipeline register is made available.
- **Enable port for B:** when selected, an enable port `ce_b` for the port B pipeline register is made available.
- **Enable port for C:** when selected, an enable port `ce_c` for the port C register is made available.
- **Enable port for D:** when selected, an enable port `ce_d` for the port D pipeline register is made available.
- **Enable port for multiplier:** when selected, an enable port `ce_m` for the multiplier register is made available.
- **Enable port for P:** when selected, an enable port `ce_p` for the port P output register is made available.
- **Enable port for opmode:** when selected, the enable port `ce_opmode` is made available.
- **Enable port for carry in:** when selected, an enable port `ce_carry_in` for the carry in register is made available.

Implementation tab

Parameters specific to the Implementation tab are:

- **Use synthesizable model:** when selected, the DSP48A is implemented from an RTL description which may not map directly to the DSP48A hardware. This is useful if a design using the DSP48A block is targeted at device families that do not contain DSP48A hardware primitives.

Other parameters used by this block are explained in the topic

[Common Options in Block Parameters Dialog Boxes.](#)

See Also

The following topics give valuable insight into using and understanding the DSP48 block:

[DSP48 Macro](#)

[Generating Multiple Cycle-True Islands for Distinct Clocks](#)

[Virtex-5 XtremeDSP™ Design Considerations](#)

[Xilinx XtremeDSP™](#)

- **Read dynamic mask from c register:** when selected, the mask used in pattern detection is read from the c port.
- **Pattern mask (48 bit hex value):** 48-bit value used to mask out certain bits during pattern detection.
- **Reset p register on pattern detection:** if selected and the pattern is detected, reset the p register on the next cycle

Optional Ports tab

Parameters specific to the Optional Ports tab are:

Consolidate control port: when selected, combines the `opmode`, `alumode`, `carry_in` and `carry_in_sel` ports into one 15-bit port. Bits 0 to 6 are the `opmode`, bits 7 to 10 are the `alumode` port, bit 11 is the `carry_in` port, and bits 12 to 14 are the `carry_in_sel` port. This option should be used when the `opmode` block is used to generate a DSP48E instruction.

Provide c port: when selected, the c port is made available. Otherwise, the c port is tied to '0'.

Provide global reset port: when selected, the port `rst` is made available. This port is connected to all available reset ports based on the pipeline selections.

Provide global enable port: when selected, the optional `en` port is made available. This port is connected to all available enable ports based on the pipeline selections.

Provide pcin port: when selected, the `pcin` port is exposed. The `pcin` port must be connected to the `pcout` port of another DSP48 block.

Provide carry cascade in port: when selected, the carry cascade in port is exposed. This port can only be connected to a carry cascade out port on another DSP48E block.

Provide multiplier sign cascade in port: when selected, the multiplier sign cascade in port (`multsigncascin`) is exposed. This port can only be connected to a multiplier sign cascade out port of another DSP48E block.

Provide carryout port: when selected, the `carryout` output port is made available. When the mode of operation for the adder/subtractor is set to one 48-bit adder, the `carryout` port is 1-bit wide. When the mode of operation is set to two 24 bit adders, the `carryout` port is 2 bits wide. The MSB corresponds to the second adder's carryout and the LSB corresponds to the first adder's carryout. When the mode of operation is set to four 12 bit adders, the `carryout` port is 4 bits wide with the bits corresponding to the addition of the 48 bit input split into 4 12-bit sections.

Provide pattern detect port: when selected, the pattern detection output port is provided. When the pattern, either from the mask or the c register, is matched the pattern detection port is set to '1'.

Provide pattern bar detect port: when selected, the pattern bar detection (`patternbdetect`) output port is provided. When the inverse of the pattern, either from the mask or the c register, is matched the pattern bar detection port is set to '1'.

Provide overflow port: when selected, the overflow output port is provided. This port indicates when the operation in the DSP48E has overflowed beyond the bit `P[N]` where `N` is between 1 and 46. `N` is determined by the number of 1s in the mask whether set by the GUI mask field or the c port input.

Provide underflow port: when selected, the underflow output port is provided. This port indicates when the operation in the DSP48E has underflowed. Underflow occurs when the

number goes below $-P[N]$ where N is determined by the number of 1s in the mask whether set by the GUI mask field or the `c` port input.

Provide ACOUT port: when selected, the `acout` output port is made available. The `acout` port must be connected to the `acin` port of another DSP48E block.

Provide BCOUT port: when selected, the `bcout` output port is made available. The `bcout` port must be connected to the `bcin` port of another DSP48E block.

Provide PCOUT port: when selected, the `pcout` output port is made available. The `pcout` port must be connected to the `pcin` port of another DSP48 block.

Provide multiplier sign cascade out port: when selected, the multiplier sign cascade out port (`multsigncascout`) is made available. This port can only be connected to the multiplier sign cascade in port of another DSP48E block and is used to support 96-bit accumulators/adders and subtracters which are built from two DSP48Es.

Provide carry cascade out port: when selected, the carry cascade out port (`carrycascout`) is made available. This port can only be connected to the carry cascade in port of another DSP48E block.

Pipelining tab

Parameters specific to the Pipelining tab are:

- **Length of a/acin pipeline:** specifies the length of the pipeline on input register A. A pipeline of length 0 removes the register on the input.
- **Length of b/bcin pipeline:** specifies the length of the pipeline for the `b` input whether it is read from `b` or `bcin`.
- **Length of acout pipeline:** specifies the length of the pipeline between the `a/acin` input and the `acout` output port. A pipeline of length 0 removes the register from the `acout` pipeline length. Must be less than or equal to the length of the `a/acin` pipeline.
- **Length of bcout pipeline:** specifies the length of the pipeline between the `b/bcin` input and the `bcout` output port. A pipeline of length 0 removes the register from the `bcout` pipeline length. Must be less than or equal to the length of the `b/bcin` pipeline.
- **Pipeline c:** indicates whether the input from the `c` port should be registered.
- **Pipeline p:** indicates whether the outputs `p` and `pcout` should be registered.
- **Pipeline multiplier:** indicates whether the internal multiplier should register its output.
- **Pipeline opmode:** indicates whether the `opmode` port should be registered.
- **Pipeline alumode:** indicates whether the `alumode` port should be registered.
- **Pipeline carry in:** indicates whether the carry in port should be registered.
- **Pipeline carry in select:** indicates whether the carry in select port should be registered.

Reset/Enable Ports

Parameters specific to the Reset/Enable tab are:

- **Reset port for a/acin:** when selected, a port `rst_a` is made available. This resets the pipeline register for port `a` when set to '1'.
- **Reset port for b/bcin:** when selected, a port `rst_b` is made available. This resets the pipeline register for port `b` when set to '1'.
- **Reset port for c:** when selected, a port `rst_c` is made available. This resets the pipeline register for port `c` when set to '1'.

- **Reset port for multiplier:** when selected, a port `rst_m` is made available. This resets the pipeline register for the internal multiplier when set to '1'.
- **Reset port for P:** when selected, a port `rst_p` is made available. This resets the output register when set to '1'.
- **Reset port for carry in:** when selected, a port `rst_carryin` is made available. This resets the pipeline register for carry in when set to '1'.
- **Reset port for alumode:** when selected, a port `rst_alumode` is made available. This resets the pipeline register for the alumode port when set to '1'.
- **Reset port for controls (opmode and carry_in_sel):** when selected, a port `rst_ctrl` is made available. This resets the pipeline register for the opmode register (if available) and the `carry_in_sel` register (if available) when set to '1'.
- **Enable port for first a/acin register:** when selected, an enable port `ce_a1` for the first a pipeline register is made available.
- **Enable port for second a/acin register:** when selected, an enable port `ce_a2` for the second a pipeline register is made available.
- **Enable port for first b/bcin register:** when selected, an enable port `ce_b1` for the first b pipeline register is made available.
- **Enable port for second b/bcin register:** when selected, an enable port `ce_b2` for the second b pipeline register is made available.
- **Enable port for c:** when selected, an enable port `ce_c` for the port C register is made available.
- **Enable port for multiplier:** when selected, an enable port `ce_m` for the multiplier register is made available.
- **Enable port for p:** when selected, an enable port `ce_p` for the port P output register is made available.
- **Enable port for carry in:** when selected, an enable port `ce_carry_in` for the carry in register is made available.
- **Enable port for alumode:** when selected, an enable port `ce_alumode` for the alumode register is made available.
- **Enable port for multiplier carry in:** when selected, an enable port `mult_carry_in` for the multiplier register is made available.
- **Enable port for controls (opmode and carry_in_sel):** when selected, the enable port `ce_ctrl` is made available. The port `ce_ctrl` controls the opmode and carry in select registers.

Implementation

Parameters specific to the Implementation tab are:

- **Use synthesizable model:** when selected, the DSP48E is implemented from an RTL description which may not map directly to the DSP48E hardware. This is useful if a design using the DSP48E block is targeted at device families that do not contain DSP48E hardware primitives.
- **Mode of operation for the adder/subtractor:** this mode can be used to implement small add-subtract functions at high speed and lower power with less logic utilization. The adder and subtracter in the adder/subtracted/logic unit can also be split into two 24-bit fields or four 12-bit fields. This is achieved by setting the mode of operation to "Two 24-bit adders" or "Four 12-bit adders". See the Virtex™-5 XtremeDSP Design Considerations for more details.

- **Use adder only:** when selected, the block is optimized in hardware for maximum performance without using the multiplier. If an instruction using the multiplier is encountered in simulation, an error is reported.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

See Also

The following topics give valuable insight into using and understanding the DSP48 block:

[DSP48 Macro](#)


[Generating Multiple Cycle-True Islands for Distinct Clocks](#)

[Virtex-5 XtremeDSP™ Design Considerations](#)

[Xilinx XtremeDSP™](#)

Dual Port RAM

This block is listed in the following Xilinx Blockset libraries: Control Logic, Memory, and Index.

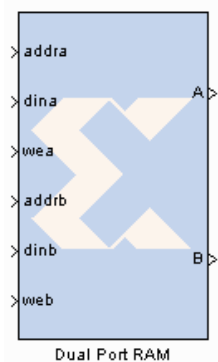

The Xilinx Dual Port RAM block implements a random access memory (RAM). Dual ports enable simultaneous access to the memory space at different sample rates using multiple data widths.

Block Interface

The block has two independent sets of ports for simultaneous reading and writing. Independent address, data, and write enable ports allow shared access to a single memory space. By default, each port set has one output port and three input ports for address, input data, and write enable. Optionally, you can also add a port enable and synchronous reset signal to each input port set.

Form Factors

The Dual Port RAM block also supports various Form Factors (FF). Form factor is defined as:

$$FF = W_B / W_A \text{ where } W_B \text{ is data width of Port B and } W_A \text{ is Data Width of Port A.}$$

The Dual port RAM block allows FF of 1, 2, 4, 8, 16 for Virtex™ devices and 1, 2, 4, 8, 16 or 32 for Virtex-II device families, provided that:

$$\text{Mod} [(D_A \times W_A), W_B] = 0 \text{ for a given FF where } D_A: \text{Depth specified for Port A}$$

The Depth of port B (D_B) is inferred from the specified form factor as follows:

$$D_B = D_A / FF.$$

The data input ports on Port A and B can have different arithmetic type and binary point position for a form factor of 1. For form factors greater than 1, the data input ports on Port A and Port B should have an unsigned arithmetic type with binary point at 0. The output ports, labeled A and B, have the same types as the corresponding input data ports.

The location in the memory block can be accessed for reading or writing by providing the valid address on each individual address port. A valid address is an unsigned integer from 0 to $d-1$, where d denotes the RAM depth (number of words in the RAM) for the particular port. An attempt to read past the end of the memory is caught as an error in simulation. The initial RAM contents can be specified through a block parameter. Each write enable port must be a boolean value. When the WE port is 1, the value on the data input is written to the location indicated by the address line.


Write Mode

The output during a write operation depends on the write mode. When the WE is 0, the output port has the value at the location specified by the address line. During a write

operation (WE asserted), the data presented on the input data port is stored in memory at the location selected by the port's address input. During a write cycle, you can configure the behavior of each data out port A and B to one of the following choices:

- **Read after write**
- **Read before write**
- **No read on write**

The write modes can be described with the help of the figure below. In the figure, the memory has been set to an initial value of 5 and the address bit is specified as 4. When using **No read on write** mode, the output is unaffected by the address line and the output is the same as the last output when the WE was 0. For the other two modes, the output is obtained from the location specified by the address line, and hence is the value of the location being written to. This means that the output can be the old value which corresponds to **Read after write**.

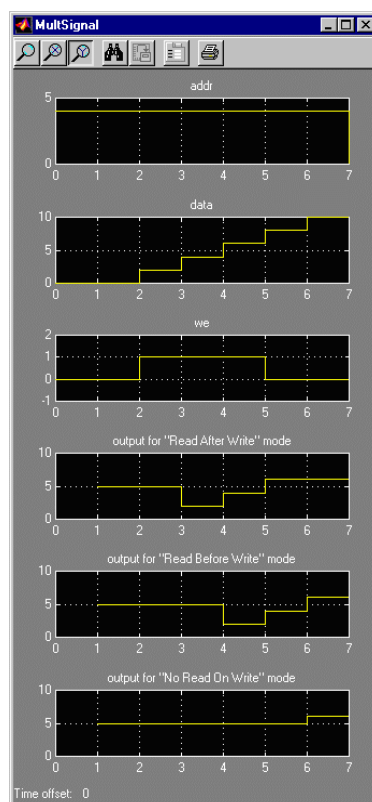

Virtex™, Virtex-E and Spartan™-II families support only Read After Write. Virtex-II, Virtex-II Pro, Spartan-3, Virtex-4, Virtex-5, and Spartan-3A DSP support all modes.

Collision Behavior

The result of simultaneous access to both ports is described below:

Read-Read Collisions

If both ports read simultaneously from the same memory cell, the read operation is successful.

Write-Write Collisions

If both ports try to write simultaneously to the same memory cell, both outputs are marked as invalid (nan).

Write-Read Collisions

This collision occurs when one port writes and the other reads from the same memory cell. While the memory contents are not corrupted, the validity of the output data on the read port depends on the Write Mode of the write port.

- If the write port is in **Read before write** mode, the other port can reliably read the old memory contents.
- If the write port is in **Read after write** or **No read on write**, data on the output of the read port is invalid (nan).

You can set the Write Mode of each port using the Advanced tab of the block parameters dialog box.

Maximum Timing Performance

When implementing dual port RAM blocks on Virtex™4, Virtex™-5 and Spartan™-3A DSP devices, maximum timing performance is possible if the following conditions are satisfied:

- The option **Provide synchronous reset port for port A output register** is un-checked.
- The option **Provide synchronous reset port for port B output register** is un-checked.
- The option **Depth** is less than 16,384.
- The option **Latency** is set to 2 or higher.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are:

- **Depth:** specifies the number of words in the memory for Port A, which must be a positive integer. The Port B depth is inferred from the form factor specified by the input data widths.
- **Initial value vector:** specifies the initial memory contents. The size and precision of the elements of the initial value vector are based on the data format specified for Port A. When the vector is longer than the RAM, the vector's trailing elements are discarded. When the RAM is longer than the vector, the RAM's trailing words are set

to zero. The initial value vector is saturated and rounded according to the precision specified on the data port A of RAM.

- **Memory Type:** option to select between block and distributed RAM. The distributed dual port RAM is always set to use port A in Read Before Write mode and port B in read-only mode.
- **Write Modes (A/B Ports):** specifies the memory behavior to be Read Before Write, Read After Write, or No Read On Write. There are device specific restrictions on the applicability of these modes.
- **Initial value for port A output Register:** specifies the initial value for port A output register. The initial value is saturated and rounded according to the precision specified on the data port A of RAM. The option to set initial value is available only for VirtexTM-II, VirtexTMII Pro, SpartanTM-3, Virtex-4, Virtex-5, and Spartan-3A DSP devices.
- **Initial value for port B output register:** specifies the initial value for port B output register. The initial value is saturated and rounded according to the precision specified on the data port B of RAM. The option to set initial value is available only for VirtexTM-II, Virtex-II Pro, SpartanTM-3, Virtex-4, Virtex-5, and Spartan-3A DSP devices.
- **Provide synchronous reset port for port A output register:** when selected, allows access to the reset port available on the port A output register of the Block RAM. The reset port is available only when the latency of the Block RAM is set to 1.
- **Provide synchronous reset port for port B output register:** when selected, allows access to the reset port available on the port B output register of the Block RAM. The reset port is available only when the latency of the Block RAM is set to 1.
- **Provide enable port for port A:** when selected, allows access to the enable port for port A. The enable port is available only when the latency of the block is greater than or equal to 1.
- **Provide enable port for port B:** when selected, allows access to the enable port for port B. The enable port is available only when the latency of the block is greater than or equal to 1.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block always uses a Xilinx LogiCORETM: Dual Port Block Memory or Distributed Memory. For the dual port block memory, the address width must be equal to $\text{ceil}(\log_2(d))$ where d denotes the memory depth. The maximum width of data words in the block memory depends on the depth specified; the maximum depth depends on the device family targeted. The tables above provide the maximum data word width for a given block memory depth.

This block uses the following Xilinx LogiCOREs.:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Dual Port RAM	Dual Port Block Memory	V6.1	•	•			•	•	•	
	Block Memory Generator	V2.4			•	•				•
	Distributed Memory	V7.1	•	•			•	•	•	
	Distributed Memory Generator	V3.3			•	•				•
	1024 Pt Complex Fast Fourier Transform	V1.0					•			

Maximum Width for Various Depth Ranges (Virtex™/Virtex-E/Spartan™-3)

Depth	Width
2 to 2048	256
2049 to 4096	192
4097 to 8192	96
8193 to 16K	48
16K+1 to 32K	24
32K+1 to 64K	12
64K+1 to 128K	6
128K+1 to 256K	3

Width for Various Depth Ranges (Virtex-II/Virtex-II Pro/Virtex-4/Virtex-5/Spartan-3A DSP)

Depth	Width
2 to 8192	256
8193 to 16K	192
16K+1 to 32K	96
32K+1 to 64K	48
64K+1 to 128K	24
128K+1 to 256K	12
256K+1 to 512K	6
512K+1 to 1024K	3

When the distributed memory parameter is selected, LogiCORE™ Distributed Memory is used. The depth must be between 16 and 65536, inclusive for Virtex-II, Virtex-II Pro, Spartan-3, Virtex-4, Virtex-5, and Spartan-3A DSP devices; depth must be between 16 to 4096, inclusive for the other FPGA families. The word width must be between 1 and 1024, inclusive.

EDK Processor

This block is listed in the following Xilinx Blockset libraries: *Index, Control*.




The EDK Processor block allows user logic developed in System Generator to be attached to embedded processor systems created using the Xilinx Embedded Development Kit (EDK).

The EDK Processor block supports two design flows: *EDK pcore generation* and *HDL netlisting*. In the *HDL netlisting* flow, the embedded processor systems created using the EDK are imported into System Generator models. In *EDK pcore generation* flow, the System Generator models are exported as a pcore, which can be later imported into EDK projects and attached to embedded processors.

Memory Map Interface

The EDK Processor block automatically generates a [Shared Memory](#)-based memory map interface for the embedded processor and the user logic developed using System Generator to communicate with each other. C device drivers are also automatically generated by the EDK Processor block in order for the embedded processors to access the attached shared memories.

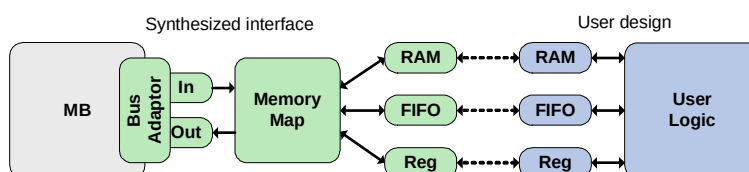

The figure above shows the memory map interface generated by the EDK Processor block. The user logic developed in System Generator is connected to a set of shared memories. These shared memories can be added to the EDK Processor block through the block dialog box described below. The EDK Processor block automatically generates the other half of the shared memories and a memory map interface that connects the shared memories to the MicroBlaze™ processor through either a slave PLB v4.6 interface, or a pair of FSL (Fast Simplex Link) buses, depending on the user selection. By default, the PLB v4.6 interface is selected. C device drivers are also automatically generated so that the MicroBlaze processor can get access to these shared-memories, by their names or their locations on the memory map interface.

The memory map interface is generated by the EDK Processor block in either the EDK pcore generation flow or HDL netlisting flow. In the EDK pcore generation flow, only the hardware to the right of the Bus Adaptor is netlisted into the exported pcore. In the HDL netlisting flow, all the hardware shown in the figure above (including the MicroBlaze processor, the memory map interface, the shared memories, and the user logic) is netlisted together, just like other System Generator designs.

Refer to [Hardware Software Co-Design](#) for more details about the design and simulation techniques offered by the EDK Processor block.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Configure processor for:** The EDK Processor block can be configured for **EDK pcore generation** or **HDL netlisting**. The EDK Import Wizard runs automatically when HDL netlisting is chosen.
- **Import:** Launch the EDK Import Wizard.
- **EDK project:** Name of the imported EDK project file (.xmp file). Click **Import...** to browse to a new EDK project file.
- **Memory Map:** A view that shows the shared memories associated with the processor. Right-clicking on the Memory Map items reveals a menu of possible operations on the shared memories: configure, delete, or re-synchronize the shared memories, refresh the tree view. Re-synchronizing shared memories helps to keep the shared memories used by the user logic consistent with the shared memories automatically generated by the EDK Processor block.

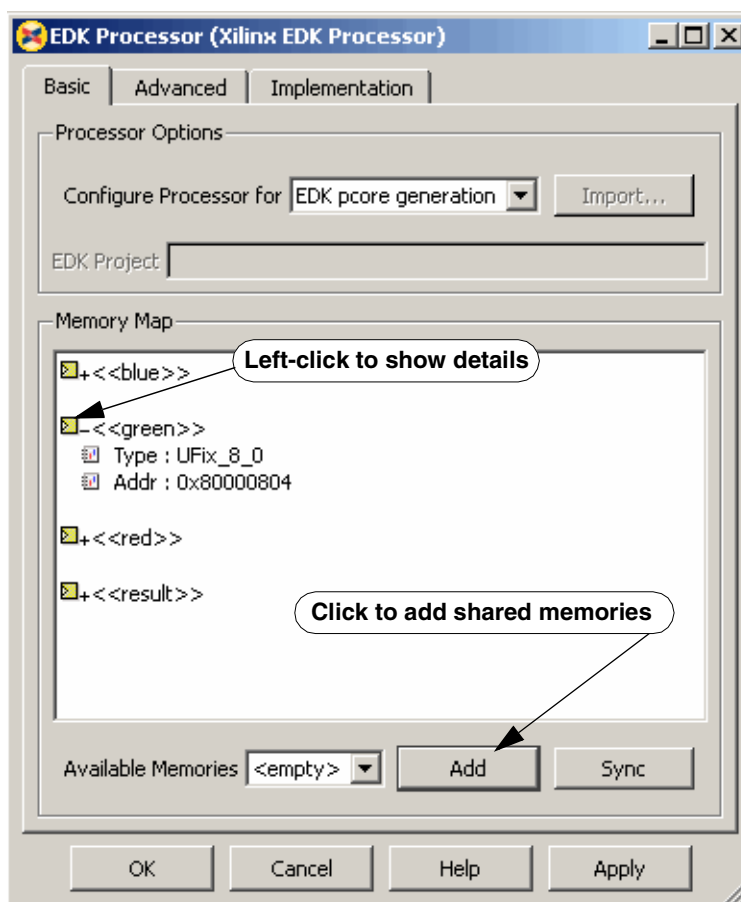

Advanced tab

Parameters specific to the Advanced tab are as follows:

Processor Port Interface

Refer to the topic [Exposing Processor Ports to System Generator](#) [Exposing Processor Ports to System Generator](#) for more information.

Implementation tab

Memory Map Interface

Parameters specific to the Implementation tab are as follows:

Memory Map Interface

- ◆ **Bus Type:** Select **PLB v4.6 (Processor Local Bus)** or **FSL (Fast Simplex Link)** as the peripheral bus. The default is the higher performance **PLB v4.6 (Processor Local Bus)**.
- ◆ If PLB is selected for the pcore bus, the target MicroBlaze™ processor must have a PLB v4.6 bus properly connected to the DPLB interface and a *proc_sys_reset* module connected to the system reset pin. Also, both the pcore PLB memory map and the PLB bus should run at the same operating frequency. These requirements will be in place if you use the *XPS Base System Builder* to build the MicroBlaze processor.
- ◆ **Base Address:** If you select the **PLB v4.6 (Processor Local Bus)** option, the bus address space will be automatically adjusted and minimized. If you know where you want the bus address space to start, enter the address and click **Lock**. Otherwise, the base address will be automatically determined for you. This Base Address option is not used with the FSL Bus Type.
- ◆ **Dual Clocks:** The Dual Clock option only applies when PLB v4.6 is selected. In the EDK Import flow, an extra clock will appear in the top-level netlist called *plb_clk*. The Processor and the PLB v4.6 bus adaptor will be driven by the *plb_clk*, and the rest of the System Generator design will be driven by the *sysgen_clk*. Note that the bitstream compilation target is not supported in this flow.

When netlisting for hardware co-simulation, the *plb_clk* is driven directly by the board's input clock, while the *sysgen_clk* is controlled by the hardware co-simulation module.

When exporting as a pcore, the generated pcore has an additional clock port that must be connected in XPS to drive the System Generator design. Refer to topic [Asynchronous Support for EDK Processors](#) [Asynchronous Support for EDK Processors](#) for more information.

Constraints

- ◆ **Constraint file:** Pathname to the modified UCF file that automatically generated by System Generator. After you successfully import an XPS project into System Generator, and if the XPS project contains a UCF (User Constraint File), System Generator will parse that UCF file and generate a modified UCF file based on the settings of the EDK Processor block. You can examine the modifications made by System Generator by clicking the **View** button to the right of the **Constraint file** text field. Should there be any undesired modifications, you can modify the original UCF file and re-import the XPS project.

- **Inherit Device Type from System Generator:** This option only works when the EDK Processor block is set in HDL Import mode. When enabled, during netlisting time, System Generator will push the device type selected on the System Generator Token to XPS and re-synthesize a new processor subsystem. This option may cause netlisting to error out if the imported XPS system uses board-specific resources or contain constraints that tie the system to a specific board or device.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Known Issues

- Only one EDK Processor block per design is supported.
- Only one MicroBlaze™ processor per design is supported. Use of multiple MicroBlaze processors per design and the embedded PowerPC™ processor are not supported.


Online Documentation for the MicroBlaze Processor

More information for the MicroBlaze™ can be found at the following address:

http://www.xilinx.com/products/design_resources/proc_central/microblaze.htm


Expression

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Math, and Index.



The Xilinx Expression block performs a bitwise logical expression.

The expression is specified with operators described in the table below. The number of input ports is inferred from the expression. The input port labels are identified from the expression, and the block is subsequently labeled accordingly. For example, the expression: $\sim((a1 \mid a2) \& (b1 \wedge b2))$ results in the following block with 4 input ports labeled 'a1', 'a2', 'b1', and 'b2'.



The expression will be parsed and an equivalent statement will be written in VHDL (or Verilog). Shown below, in decreasing order of precedence, are the operators that can be used in the Expression block.

Operator	Symbol
Precedence	()
NOT	~
AND	&
OR	
XOR	^

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab


Parameters specific to the Basic tab are as follows:

- **Expression:** Bitwise logical expression.
- **Align Binary Point:** specifies that the block must align binary points automatically. If not selected, all inputs must have the same binary point position.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Fast Fourier Transform 6.0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).

The Xilinx Fast Fourier Transform 6.0 block is supported for Virtex™-5, Virtex-4, Virtex-II Pro, Spartan™-3, Spartan-3E, Spartan-3A and Spartan-3A DSP devices.

The N-point (where, $N = 2^m$, $m = 3-16$) forward or inverse DFT (IDFT) is computed on a vector of N complex values represented using data widths from 8 to 34, inclusive. The transform computation uses the Cooley-Tukey decimate-in-time algorithm for its implementation. The

FFT general formula is explained below.

Theory of Operation

The FFT is a computationally efficient algorithm for computing a Discrete Fourier Transform (DFT) of sample sizes that are a positive integer power of 2. The DFT of a sequence is defined as:

$$X(k) = \sum_{n=0}^{N-1} x(n) e^{-jnk2\pi/N} \quad k = 0, \dots, N-1$$

where N is the transform and j is the square root of -1. The inverse DFT (IDFT) is:

$$x(n) = \frac{1}{N} \sum_{k=0}^{N-1} X(k) e^{jnk2\pi/N} \quad n = 0, \dots, N-1$$

Block Interface

Input Signals:

xn_re	real component of input data stream. The signal driving xn_re can be a signed data type of width S with binary point at S-1, where S is a value between 8 and 34, inclusive. eg: Fix_8_7, Fix_34_33
xn_im	imaginary component of input data stream. The signal driving xn_im can be a signed data type of width S with binary point at S-1, where S is a value between 8 and 34, inclusive. eg: Fix_8_7, Fix_34_33
start	marks the beginning of each data frame. The start signal can be asserted as a pulse to start processing an input data frame or it can be tied to high. The signal driving start must be Bool.

unload	is used to read the output in natural order. The unload port is available only for implementing the Radix-4 Burst I/O, Radix-2 Burst I/O, or Radix-2 Lite Burst I/O architecture and Natural order output ordering is selected. The unload signal is sampled after the block is done processing the input frame. The block outputs data in natural order after the unload signal is asserted high. If the start signal is asserted before the unload signal, the block outputs data in bit reversed order. The signal driving unload must be Bool.
fwd_inv	0 for inverse transform, 1 for forward transform. The signal driving fwd must be Bool. By default, the FFT is configured for forward transform.
fwd_inv_we	when asserted, loads the transform type from the input port fwd for the next input data frame. The signal driving fwd_inv_we must be Bool.
nfft	provides the point size for the next input data frame. The nfft port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving nfft must be unsigned signal of width 5 with binary point at 0, UFix_5_0. Point size of the transform: NFFT can be the size of the transform or any smaller point size. For example, a 1024-point FFT can compute point sizes 1024, 512, 256, and so on. The value of NFFT is log2 (point size). This port is only used with run-time configurable transform point size
nfft_we	when asserted, resets the current operation of the block and loads the point size from the input port nfft for the next input data frame. The nfft_we port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving nfft_we must be Bool.
cp_len	provides the cyclic prefix length size for the next input data frame. The cp_len port is available only when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. The signal driving cp_len must be unsigned signal of width N with binary point at 0, where N is log2 of maximum number of sample points, UFix_N_0. cp_len can be any number from zero to one less than the point size.
cp_len_we	when asserted, loads the cyclix prefix length from the input port cp_len for the next input data frame. The cp_len_we port is available only when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. The signal driving cp_len_we must be Bool
scale_sch	provides the scaling schedule to be used for the input data frame. The scale_sch port is available only for Fixed Point Scaled mode. Refer to page 11 of the LogiCORE data sheet for a full description of this port.
scale_sch_we	when asserted, loads the scaling schedule from the input port scale_sch for the next input data frame. The scale_sch_we port is available only for Fixed Point Scaled mode. The signal driving scale_sch_we must be Bool.

Output Signals:

<code>xk_re</code>	real component of output data stream. <code>xk_re</code> is the same as the input <code>xn_re</code> for Scaled and Block Floating Point mode. The width of <code>xk_re</code> signal grows left from the <code>xn_re</code> binary point in the Unscaled mode by $(1+\log_2 N)$ where N is the maximum point size. This signal is valid only when <code>dv</code> goes high. Note: Both <code>xn_re</code> and <code>xn_im</code> signals should have the same data type.
<code>xk_im</code>	imaginary component of output data stream. <code>xk_im</code> is the same as the input <code>xn_im</code> for Scaled and Block Floating Point mode. The width of <code>xk_im</code> signal grows left from the <code>xn_im</code> binary point in the Unscaled mode by $(1+\log_2 N)$ where N is the maximum point size. This signal is valid only when <code>dv</code> goes high. Note: Both <code>xn_re</code> and <code>xn_im</code> signals should have the same data type.
<code>xn_index</code>	marks the index of the input data. The <code>xn_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0. (N is the maximum point size.) This signal is valid only when <code>dv</code> goes high.
<code>xk_index</code>	marks the index of the output data. The <code>xk_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0. (N is the maximum point size.)
<code>rfd</code>	active high after the <code>start</code> signal is asserted till the <code>xn_index</code> count reaches $N-1$. (N is the maximum point size.) The <code>rfd</code> signal is marked as Bool.
<code>busy</code>	active high when the block is processing the current input data frame. The <code>busy</code> signal is marked as Bool.
<code>dv</code>	High indicates that the output data is valid. The <code>dv</code> signal is Boolean.
<code>edone</code>	active high one sample period before the block is ready to output the processed data frame. <code>edone</code> is marked as Bool.
<code>done</code>	active high when the block is ready to output the processed data frame. <code>done</code> is marked as Bool.
<code>cpv</code>	marks the output data as valid when cyclic prefix data is presented at the output. The <code>cpv</code> port is available only when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. <code>cpv</code> signal is marked as Bool
<code>rfs</code>	active high when the block is ready to process the start input to begin data loading. The <code>rfs</code> port is available only for Pipelined Streaming I/O implementation, when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. <code>rfs</code> signal is marked as Bool
<code>ovflo</code>	marks the output data frame with active high signal if an overflow condition was detected while processing the input data frame in the Scaled mode. This signal is valid only when <code>dv</code> goes high. The <code>ovflo</code> signal is marked as Bool.
<code>blk_exp</code>	specifies the exponent value for the output data frame in Block Floating Point mode. The <code>blk_exp</code> signal only available when <code>dv</code> goes high. <code>blk_exp</code> is marked as an unsigned signal of width 5 with binary point at 0. This signal is valid only when <code>dv</code> goes high.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Transform length:** one of $N = 2^{(3..16)} = 8 - 65536$.
- **Implementation Options:** choose between Pipelined, Streaming I/O; Radix-4, Burst I/O; Radix-2, Burst I/O; Radix-2 Lite, Burst I/O.

Transform Length Options

- **Run time configurable transform length:** The transform point size can be set through the `nfft` port if this option is selected. Valid settings and the corresponding transform sizes are provided in the section titled Transform Size in the associated LogiCORE data sheet V6.0

Advanced tab

Parameters specific to the Advanced tab are as follows:

Precision Options

- **Phase factor width:** choose a value between 8 and 34, inclusive to be used as bit widths for phase factors.

Scaling options

Select between **Unscaled**, **Scaled**, and **Block floating point** output data types. The Block floating point option is not available for the Pipelined Streaming I/O implementation.

Rounding modes

- **Rounding mode:** choose between **Truncation** and **Convergent rounding** to be applied at the output of each rank.

Output ordering

- **Output ordering:** choose between **Bit/Digit reversed order** or **Natural order** output.
- **Cyclic prefix insertion:** option to have optional input ports `cp_len` and `cp_len_we` for dynamically specifying the cyclic prefix insertion for a transform output frame. Cyclic prefix insertion takes a section of the output of the FFT and prefixes it to the beginning of the transform. The resultant output data consists of the cyclic prefix (a copy of the end of the output data) followed by the complete output data, all in natural order. Cyclic prefix insertion is only available when output ordering is Natural Order.

Optional Pins

- **en**
- **rst:**
- **ovflo:** option to have an optional output port `ovflo` when Scaled scaling option is selected.

Implementation tab

Parameters specific to the Implementation tab are as follows:

Memory Options

- **Data:** option to choose between **Block RAM** and **Distributed RAM**. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Phase factors:** choose between **Block RAM** and **Distributed RAM**. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Number of stages using Block RAM:** store data and phase factor in **Block RAM** and partially in **Distributed RAM**. This option is available only for the Pipelined Streaming I/O implementation.
- **Reorder buffer:** choose between **Block RAM** and **Distributed RAM**.

Optimize Options

- **Optimize Block RAM count using hybrid memories**

- **Optimize for speed using Xtreme DSP slices:** In VirtexTM-4 and Virtex-5, the complex multiplications and the butterfly additions/subtractions can be computed in Xtreme DSPTM slices.
- **Complex multiplication:** implement the complex multipliers built out of 4 real multipliers instead of 3. This allows the entire real complex multiplication to be calculated within the Xtreme DSP slices, resulting in faster clock speeds. Select this option for the largest increase in clock speed with a minimal increase in the number of extra DSP48's used. This option is only available for Virtex-4. In Virtex-5 it is always selected.
- **Butterfly arithmetic:** implement the additions and subtractions of the butterflies using DSP48's. This option is only available in Virtex-4, if the output width is less than or equal to 30. In Virtex-5, this feature is available for all output widths.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Block Timing

To better understand the FFT blocks control behavior and timing, please consult the core data sheet.


Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Fast Fourier Transform:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Fast Fourier Transform 6.0	Fast Fourier Transform	V6.0		•	•	•		•	•	•

FDATool

This block is listed in the following Xilinx Blockset libraries: *DSP, Tools, and Index*




The Xilinx FDATool block provides an interface to the FDATool software available as part of the MATLAB Signal Processing Toolbox.

The block does not function properly and should not be used if the Signal Processing Toolbox is not installed. This block provides a means of defining an FDATool object and storing it as part of a System Generator model. FDATool provides a powerful means for defining digital filters with a graphical user interface.

Example of Use

Copy an FDATool block into a subsystem where you would like to define a filter. Double-clicking the block icon opens up an FDATool session and graphical user interface. The filter is stored in an data structure internal to the FDATool interface block, and the coefficients can be extracted using MATLAB helper functions provided as part of System Generator. The function call `xlfsa_numerator('fdablk')` returns the numerator of the transfer function (e.g., the impulse response of a finite impulse response filter) of the FDATool block named 'fdablk'. Similarly, the helper function `xlfsa_denominator('fdablk')` retrieves the denominator for a non-FIR filter.

A typical use of the FDATool block is as a companion to an FIR filter block, where the Coefficients field of the filter block is set to `xlfsa_numerator('fdablk')`. An example is shown in the following diagram:

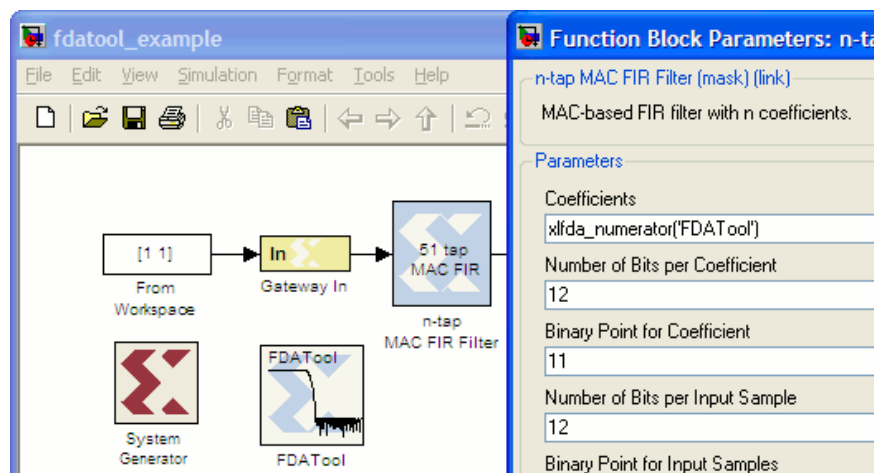

Note that `xlfsa_numerator()` can equally well be used to initialize a memory block or a 'coefficient' variable for a masked subsystem containing an FIR filter.


This block does not use any hardware resources

FDA Tool Interface

Double-clicking the icon in your Simulink model opens up an FDATool session and its graphical user interface. Upon closing the FDATool session, the underlying FDATool object is stored in the UserData parameter of the Xilinx FDATool block. Use the `xlfsa_numerator()` helper function and `get_param()` to extract information from the object as desired.

FFT v1_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The Xilinx FFT v1_0 block is supported only for the Virtex™ device. For other device family support refer to the FFT v3_1 block. The Xilinx FFT Block computes the Discrete Fourier Transform (DFT) using the radix-4 Cooley-Tukey algorithm, explained below.

Cooley-Tukey Algorithm

The N-point DFT of a complex vector $x(n) = [x(0), x(1), \dots, x(N-1)]$, is the vector $X(k) = [X(0), X(1), \dots, X(N-1)]$, where the k-th element is defined as:

$$X(k) = \sum_{m=0}^{N-1} x(m) W_N^{mk}$$

for $k=0, 1, \dots, N-1$, where:

$$W_N = e^{(-j)\frac{2\pi}{N}}$$

is a principal N-th root of unity. The FFT block accepts as input a stream of complex data represented as a pair of Xilinx fixed-point data and computes successive DFTs of non-overlapping frames of N data samples.

Block Interface

The block interface (inputs and outputs as seen on the FFT icon) is as follows:

Input Signals:

xn_r	real component of input data stream
xn_i	imaginary component of input data stream
vin	marks each data input as valid or invalid. Signal can be used to align the start of the FFT to your data frames. See timing diagram below.
inv	0 for forward transform, 1 for inverse

Output Signals:

Xk_r	real component of output data stream
Xk_i	imaginary component of output data stream

<i>vout</i>	marks the output data as valid or invalid. If any of the N inputs of a frame is marked as invalid, the corresponding output frame will be marked as invalid.
<i>done</i>	active high on first output sample in a frame
<i>rfd</i>	active high when block can accept input data

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:


- **Number of Sample Points:** transform length, one of 16, 64, 256, or 1024.
- **Memory Usage:** number of memory banks used to compute the transform, one of Single, Double, Triple (not used for 16 point FFTs).
- **Scale Output By:** one of 1/N or 1/(2N).
- **Invalidate Transform on Overflow:** block behavior when internal overflow occurs; you may choose to invalidate the output (if checkbox is selected) or to stop the simulation in the event of an overflow (if checkbox is not selected).

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Block Timing

The timing diagram below illustrates the behavior of the FFT block. The diagram indicates the number of sample periods between the taking of input samples and the production of the output samples for a particular frame. (Note that the timing characteristics depend on the number of points in the FFT and the memory usage mode selected. For triple memory configurations, the timing numbers are specified in terms of the output data sample period.)

FFT Timing Diagram

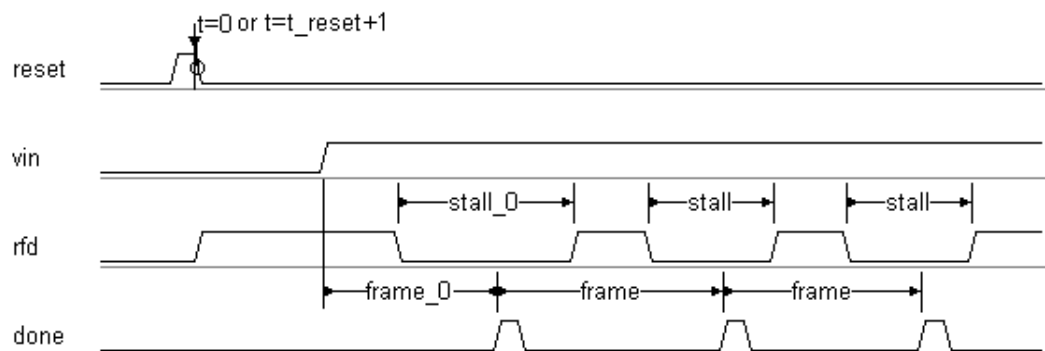

FFT Timing Characteristics

	Single Memory	Double Memory	Triple Memory
64-point	stall_0 = 275 stall = 275 frame_0 = 277 frame = 339	stall_0 = 146 stall = 128 frame_0 = 276 frame = 192	stall_0 = 0 stall = 0 frame_0 = 406 frame = 192
256-point	stall_0 = 1074 stall = 1074 frame_0 = 1076 frame = 1330	stall_0 = 789 stall = 768 frame_0 = 1075 frame = 1024	stall_0 = 0 stall = 0 frame_0 = 1589 frame = 768
1024-point	stall_0 = 5170 stall = 5170 frame_0 = 5172 frame = 6194	stall_0 = 4117 stall = 4096 frame_0 = 5171 frame = 5120	stall_0 = 0 stall = 0 frame_0 = 8246 frame = 4096

For 16-point FFTs, the block is always in the "ready for data" state and output frames are delivered continuously. Thus, there are no stall periods (stall = stall_0 = 0), and the frame variable of the timing diagram defaults to 16 sample periods. There is, however, a pipeline delay (i.e., it takes some time for the first output frame to appear) with frame_0 = 84 sample periods.

Xilinx LogiCORE

The block always uses the Xilinx LogiCORE™ FFT V1.0. The number of points supported are N=16, 64, 256, or 1024. The 64, 256, and 1024 point FFTs contain external memories implemented with the LogiCORE Dual Port Block Memory. The number of memory blocks (either 1, 2, or 3) determines the timing characteristics and size of the implementation. The FFT LogiCORE support only 16-bit data, although in simulation, the System Generator FFT block supports other data sizes.

For more information on implementing FFTs for Virtex™ device, please see the LogiCORE information topic for the FFT.

Note: Virtex-II device support has been deprecated for the FFT block. Switch your design to use the FFT v3_1 block instead.

This block uses the following Xilinx LogiCOREs.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
	16 Pt Complex Fast Fourier Transform	V1.0					•			
	64 Pt Complex Fast Fourier Transform	V1.0					•			
	256 Pt Complex Fast Fourier Transform	V1.0					•			
	1024 Pt Complex Fast Fourier Transform	V1.0					•			

FFT v3_1

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The Xilinx FFT v3_1 block is supported only for Virtex™-4, Virtex-II, Virtex-II Pro and Spartan™-3 devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).

The N-point (where, $N = 2m$, $m = 4 - 14$) forward or inverse DFT (IDFT) is computed on a vector of N complex values represented using data widths of 8, 12, 16, 20, or 24. The transform computation uses the Cooley-Tukey decimate-in-time algorithm as explained below.

Theory of Operation


The FFT is a computationally efficient algorithm for computing a Discrete Fourier Transform (DFT) of sample sizes that are a positive integer power of 2. The DFT of a sequence is defined as:

$$X(k) = \sum_{n=0}^{N-1} x(n)e^{-jnk2\pi/N} \quad k = 0, \dots, N-1$$

where N is the transform and j is the square root of -1. The inverse DFT (IDFT) is:

$$x(n) = \frac{1}{N} \sum_{k=0}^{N-1} X(k)e^{jnk2\pi/N} \quad n = 0, \dots, N-1$$

Block Interface

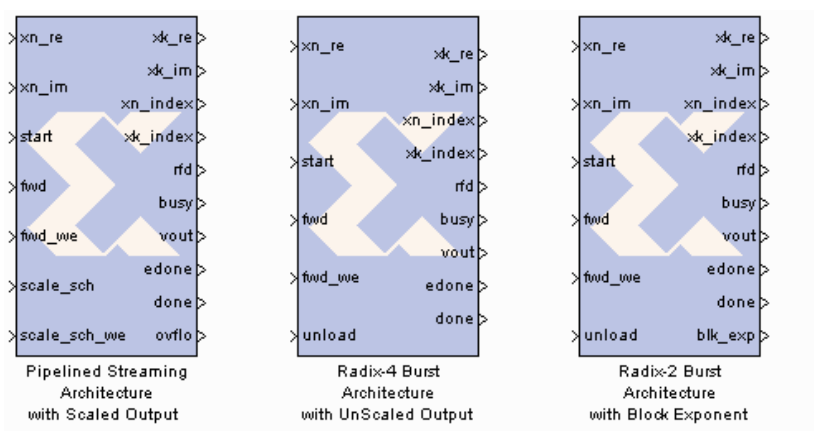

The block interface (inputs and outputs as seen on the FFT icon) for various implementation and scaling modes is as follows:

Input Signals:

<code>xn_re</code>	real component of input data stream. The signal driving <code>xn_re</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S = 8, 12, 16, 20</code> or <code>24</code> .
<code>xn_im</code>	imaginary component of input data stream. The signal driving <code>xn_im</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S = 8, 12, 16, 20</code> or <code>24</code> .
<code>start</code>	marks the beginning of each data frame. The start signal can be asserted as a pulse to start processing an input data frame or it can be tied to high. The signal driving start must be Bool.
<code>unload</code>	is used to read the output in either natural or bit reversed order. The unload port is available only for implementing the Radix-4 Burst I/O or Radix-2 Minimum Resources architecture. The unload signal is sampled after the block is done processing the input frame. The block outputs data in natural order after the unload signal is asserted high. If the start signal is asserted before the unload signal, the block outputs data in bit reversed order. The signal driving unload must be Bool.
<code>fwd</code>	0 for inverse transform, 1 for forward transform. The signal driving <code>fwd</code> must be Bool.
<code>fwd_we</code>	when asserted, loads the transform type from the input port <code>fwd</code> for the next input data frame. The signal driving <code>fwd_we</code> must be Bool.
<code>scale_sch</code>	provides the scaling schedule to be used for the input data frame. The <code>scale_sch</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch</code> must be unsigned signal of width <code>S</code> with binary point at 0, where, $S = 2 * \log_2 N$, for Radix-2 Minimum Resources, $2 * \lceil \log_2 N / 2 \rceil$, otherwise.
<code>scale_sch_we</code>	when asserted, loads the scaling schedule from the input port <code>scale_sch</code> for the next input data frame. The <code>scale_sch_we</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch_we</code> must be Bool.
<code>nfft</code>	provides the point size for the next input data frame. The <code>nfft</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft</code> must be unsigned signal of width <code>S</code> with binary point at 0, where $S = \log_2 N$.
<code>nfft_we</code>	when asserted, resets the current operation of the block and loads the point size from the input port <code>nfft</code> for the next input data frame. The <code>nfft_we</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft_we</code> must be Bool.

Note: Both `xn_re` and `xn_im` signals should have the same data type.

Output Signals:

<code>xk_re</code>	real component of output data stream. <code>xk_re</code> is same as the input <code>xn_re</code> for Scaled and Block Floating Point mode. The width of <code>xk_re</code> signal grows left from the <code>xn_re</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xk_im</code>	imaginary component of output data stream. <code>xk_im</code> is the same as the input <code>xn_im</code> for Scaled and Block Floating Point mode. The width of the <code>xk_im</code> signal grows left from the <code>xn_im</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xn_index</code>	marks the index of the input data. The <code>xn_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>xk_index</code>	marks the index of the output data. The <code>xk_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>rfd</code>	active high after the start signal is asserted till the <code>xn_index</code> count reaches $N-1$. The <code>rfd</code> signal is marked as Bool.
<code>busy</code>	active high when the block is processing the current input data frame. The <code>busy</code> signal is marked as Bool.
<code>vout</code>	marks the output data as valid or invalid. The <code>vout</code> signal is marked as Bool.
<code>edone</code>	active high one sample period before the block is ready to output the processed data frame. <code>edone</code> is marked as Bool.
<code>done</code>	active high when the block is ready to output the processed data frame. <code>done</code> is marked as Bool.
<code>ovflo</code>	marks the output data frame with active high signal if an overflow condition was detected while processing the input data frame in the Scaled mode. <code>ovflo</code> is marked as Bool.
<code>blk_exp</code>	specifies the exponent value for the output data frame in Block Floating Point mode. <code>blk_exp</code> is marked as an unsigned signal of width 4 with binary point at 0.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Implementation:** option to choose between Radix-4 Streaming I/O, Radix-4 Burst I/O, Radix-2 Minimum Resources or Pipelined Streaming I/O.
- **Number of Sample Points:** transform length, one of $N = 2(3..16) = 8 - 65536$. The FFTx block supports sample points, 64 - 8192 for Radix-4 Streaming I/O, 64 - 65536 for Radix-4 Burst I/O, and 8 - 65536 for Radix-2 Minimum Resources and Pipelined Streaming I/O, implementation.

- **Scaling:** option to select between Unscaled, Scaled and Block Floating Point output data types. The Block Floating Point option is not available for Radix-4 Streaming I/O and Pipelined Streaming I/O implementation.
- **Rounding Mode:** option to choose between Truncation and Convergent Rounding to be applied at the output of each rank.
- **Phase Factor Bit Width:** option to choose between 8, 12, 16, 20 or 24 to be used as bit widths for phase factors.
- **Enable Dynamic Transform Size:** option to have optional input ports N and N_we for dynamically varying the point size of input data frames.
- **Provide Overflow Port:** option to have optional output ports `ovflo` when Scaled scaling option is selected.

Advanced tab

Parameters specific to the Advanced tab are as follows:

- **Output Ordering:** option to choose between bit reversed or natural order output.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Optimize for Speed Using DSP48:** In Virtex™-4, the complex multiplications, the butterfly additions/subtractions, and part of the phase factor generator can be computed in Xtreme DSP™ slices.
- **Phase Factor Memory Type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Data Memory Type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Number of Stages Using Block RAM:** option to store data and phase factor in block ram and partially in distributed ram. This option is available only for Pipelined Streaming I/O implementation.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Block Timing

To better understand the FFT blocks control behavior and timing, please consult the core data sheet.


Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Fast Fourier Transform:.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FFT v3_1	Fast Fourier Transform	V3.1		•				•	•	

FFT v3_2

This block is listed in the following Xilinx Blockset libraries: DSP and Index.



The Xilinx FFT v3_2 block is supported only for Virtex™-4, Virtex-II, Virtex-II Pro and Spartan™-3 devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).

The N-point (where, $N = 2m$, $m = 4 - 14$) forward or inverse DFT (IDFT) is computed on a vector of N complex values represented using data widths from 8 to 24, inclusive. The transform computation uses the Cooley-Tukey decimate-in-time algorithm as explained below.

Theory of Operation


The FFT is a computationally efficient algorithm for computing a Discrete Fourier Transform (DFT) of sample sizes that are a positive integer power of 2. The DFT of a sequence is defined as:

$$X(k) = \sum_{n=0}^{N-1} x(n)e^{-jnk2\pi/N} \quad k = 0, \dots, N-1$$

where N is the transform and j is the square root of -1. The inverse DFT (IDFT) is:

$$x(n) = \frac{1}{N} \sum_{k=0}^{N-1} X(k)e^{jnk2\pi/N} \quad n = 0, \dots, N-1$$

Block Interface

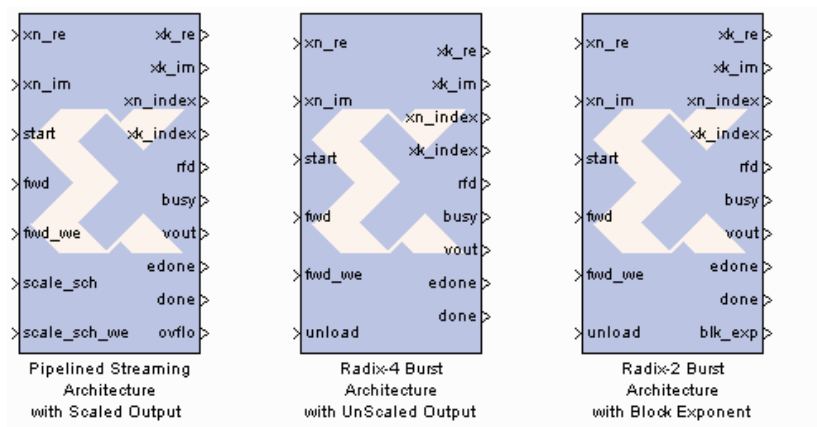

The block interface (inputs and outputs as seen on the FFT icon) for various implementation and scaling modes is as follows:

Input Signals:

<code>xn_re</code>	real component of input data stream. The signal driving <code>xn_re</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S</code> is a value between 8 and 24, inclusive. eg: <code>Fix_8_7</code> , <code>Fix_24_23</code>
<code>xn_im</code>	imaginary component of input data stream. The signal driving <code>xn_im</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S</code> is a value between 8 and 24, inclusive. eg: <code>Fix_8_7</code> , <code>Fix_24_23</code>
<code>start</code>	marks the beginning of each data frame. The start signal can be asserted as a pulse to start processing an input data frame or it can be tied to high. The signal driving start must be Bool.
<code>unload</code>	is used to read the output in either natural or bit reversed order. The unload port is available only for implementing the Radix-4 Burst I/O or Radix-2 Minimum Resources architecture. The unload signal is sampled after the block is done processing the input frame. The block outputs data in natural order after the unload signal is asserted high. If the start signal is asserted before the unload signal, the block outputs data in bit reversed order. The signal driving unload must be Bool.
<code>fwd</code>	0 for inverse transform, 1 for forward transform. The signal driving <code>fwd</code> must be Bool.
<code>fwd_we</code>	when asserted, loads the transform type from the input port <code>fwd</code> for the next input data frame. The signal driving <code>fwd_we</code> must be Bool.
<code>scale_sch</code>	provides the scaling schedule to be used for the input data frame. The <code>scale_sch</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch</code> must be unsigned signal of width <code>S</code> with binary point at 0, where, $S = 2 * \log_2 N$, for Radix-2 Minimum Resources, $2 * \text{ceil}(\log_2 N / 2)$, otherwise.
<code>scale_sch_we</code>	when asserted, loads the scaling schedule from the input port <code>scale_sch</code> for the next input data frame. The <code>scale_sch_we</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch_we</code> must be Bool.
<code>nfft</code>	provides the point size for the next input data frame. The <code>nfft</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft</code> must be unsigned signal of width <code>S</code> with binary point at 0, where $S = \log_2 N$.
<code>nfft_we</code>	when asserted, resets the current operation of the block and loads the point size from the input port <code>nfft</code> for the next input data frame. The <code>nfft_we</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft_we</code> must be Bool.

Note: Both `xn_re` and `xn_im` signals should have the same data type.

Output Signals:

<code>xk_re</code>	real component of output data stream. <code>xk_re</code> is the same as the input <code>xn_re</code> for Scaled and Block Floating Point mode. The width of <code>xk_re</code> signal grows left from the <code>xn_re</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xk_im</code>	imaginary component of output data stream. <code>xk_im</code> is the same as the input <code>xn_im</code> for Scaled and Block Floating Point mode. The width of <code>xk_im</code> signal grows left from the <code>xn_im</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xn_index</code>	marks the index of the input data. The <code>xn_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>xk_index</code>	marks the index of the output data. The <code>xk_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>rfd</code>	active high after the start signal is asserted till the <code>xn_index</code> count reaches $N-1$. The <code>rfd</code> signal is marked as Bool.
<code>busy</code>	active high when the block is processing the current input data frame. The <code>busy</code> signal is marked as Bool.
<code>vout</code>	marks the output data as valid or invalid. <code>vout</code> signal is marked as Bool.
<code>edone</code>	active high one sample period before the block is ready to output the processed data frame. <code>edone</code> is marked as Bool.
<code>done</code>	active high when the block is ready to output the processed data frame. <code>done</code> is marked as Bool.
<code>ovflo</code>	marks the output data frame with active high signal if an overflow condition was detected while processing the input data frame in the Scaled mode. <code>ovflo</code> signal is marked as Bool.
<code>blk_exp</code>	specifies the exponent value for the output data frame in Block Floating Point mode. <code>blk_exp</code> is marked as an unsigned signal of width 4 with binary point at 0.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Implementation:** option to choose between Radix-4 Streaming I/O, Radix-4 Burst I/O, Radix-2 Minimum Resources or Pipelined Streaming I/O.
- **Number of Sample Points:** transform length, one of $N = 2(3..16) = 8 - 65536$. The FFTx block supports sample points, 64 - 8192 for Radix-4 Streaming I/O, 64 - 65536 for Radix-4 Burst I/O, and 8 - 65536 for Radix-2 Minimum Resources and Pipelined Streaming I/O, implementation.
- **Output Ordering:** option to choose between bit reversed or natural order output.

- **Scaling:** option to select between Unscaled, Scaled and Block Floating Point output data types. The Block Floating Point option is not available for Radix-4 Streaming I/O and Pipelined Streaming I/O implementation.
- **Rounding Mode:** option to choose between Truncation and Convergent Rounding to be applied at the output of each rank.
- **Phase Factor Bit Width:** option to choose between 8, 12, 16, 20 or 24 to be used as bit widths for phase factors.
- **Enable Dynamic Transform Size:** option to have optional input ports N and N_we for dynamically varying the point size of input data frames.
- **Provide Overflow Port:** option to have optional output ports ovflo when Scaled scaling option is selected

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Optimize for Speed Using DSP48:** In Virtex™-4, the complex multiplications, the butterfly additions/subtractions, and part of the phase factor generator can be computed in Xtreme DSP™ slices.
 - ♦ **Butterfly arithmetic:** option to implement the additions and subtractions of the butterflies using DSP48's. This option is only available if the output width is less than or equal to 30.
 - ♦ **Complex multiplication:** option to implement the complex multipliers built out of 4 real multipliers instead of 3. This allows the entire real complex multiplication to be calculated within the Xtreme DSP slices, resulting in faster clock speeds. Select this option for the largest increase in clock speed with a minimal increase in the number of extra DSP48's used.
 - ♦ **Phase factor generation:** option to implement the phase factor generator using two Xtreme DSP slices for every phase factor table, increasing clock speeds for the larger point sizes with wide phase factor bit widths.
- **Phase Factor Memory Type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Data Memory Type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Number of Stages Using Block RAM:** option to store data and phase factor in block ram and partially in distributed ram. This option is available only for Pipelined Streaming I/O implementation.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Block Timing

To better understand the FFT blocks control behavior and timing, please consult the core data sheet.

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Fast Fourier Transform:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FFT v3_2	Fast Fourier Transform	V3.2		•				•	•	

FFT v4_1

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*.



The Xilinx FFT v4_1 block is supported for Virtex™-5, Virtex-4, Virtex-II Pro, Spartan™-3, Spartan-3E and Spartan-3A devices. The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).

The N-point (where, $N = 2m$, $m = 4 - 14$) forward or inverse DFT (IDFT) is computed on a vector of N complex values represented using data widths from 8 to 24, inclusive. The transform computation uses the Cooley-Tukey decimate-in-time algorithm as explained below.

Theory of Operation


The FFT is a computationally efficient algorithm for computing a Discrete Fourier Transform (DFT) of sample sizes that are a positive integer power of 2. The DFT of a sequence is defined as:

$$X(k) = \sum_{n=0}^{N-1} x(n)e^{-jnk2\pi/N} \quad k = 0, \dots, N-1$$

where N is the transform and j is the square root of -1. The inverse DFT (IDFT) is:

$$x(n) = \frac{1}{N} \sum_{k=0}^{N-1} X(k)e^{jnk2\pi/N} \quad n = 0, \dots, N-1$$

Block Interface

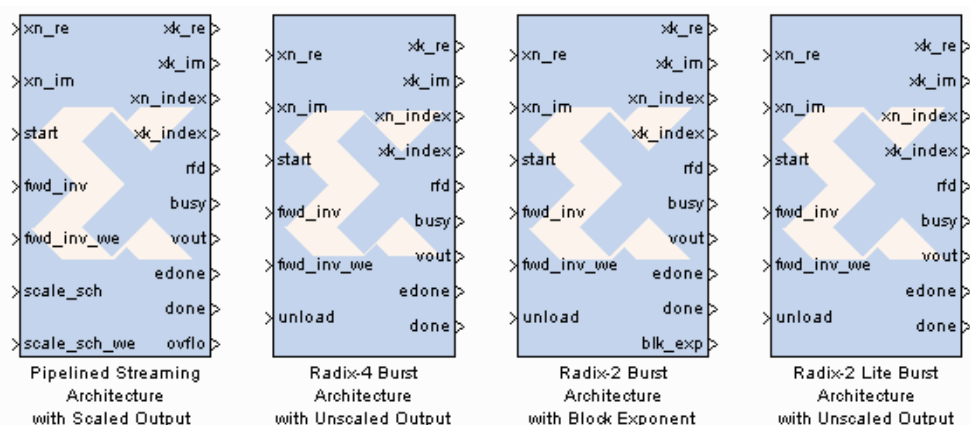

The block interface (inputs and outputs as seen on the FFT icon) for various implementation and scaling modes is as follows:

Input Signals:

<code>xn_re</code>	real component of input data stream. The signal driving <code>xn_re</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S</code> is a value between 8 and 24, inclusive. eg: <code>Fix_8_7</code> , <code>Fix_24_23</code>
<code>xn_im</code>	imaginary component of input data stream. The signal driving <code>xn_im</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S</code> is a value between 8 and 24, inclusive. eg: <code>Fix_8_7</code> , <code>Fix_24_23</code>
<code>start</code>	marks the beginning of each data frame. The <code>start</code> signal can be asserted as a pulse to start processing an input data frame or it can be tied to high. The signal driving <code>start</code> must be Bool.
<code>unload</code>	is used to read the output in natural order. The <code>unload</code> port is available only for implementing the Radix-4 Burst I/O, Radix-2 Burst I/O, or Radix-2 Lite Burst I/O architecture. The <code>unload</code> signal is sampled after the block is done processing the input frame. The block outputs data in natural order after the <code>unload</code> signal is asserted high. If the <code>start</code> signal is asserted before the <code>unload</code> signal, the block outputs data in bit reversed order. The signal driving <code>unload</code> must be Bool.
<code>fwd</code>	0 for inverse transform, 1 for forward transform. The signal driving <code>fwd</code> must be Bool. By default, the FFT is configured for forward transform.
<code>fwd_we</code>	when asserted, loads the transform type from the input port <code>fwd</code> for the next input data frame. The signal driving <code>fwd_we</code> must be Bool.
<code>scale_sch</code>	provides the scaling schedule to be used for the input data frame. The <code>scale_sch</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch</code> must be unsigned signal of width <code>S</code> with binary point at 0, where, $S = 2 * \log_2 N$, for Radix-2 architectures, $2 * \text{ceil}(\log_2 N / 2)$, otherwise
<code>scale_sch_we</code>	when asserted, loads the scaling schedule from the input port <code>scale_sch</code> for the next input data frame. The <code>scale_sch_we</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch_we</code> must be Bool.
<code>nfft</code>	provides the point size for the next input data frame. The <code>nfft</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft</code> must be unsigned signal of width 5 with binary point at 0, <code>UFix_5_0</code> .
<code>nfft_we</code>	when asserted, resets the current operation of the block and loads the point size from the input port <code>nfft</code> for the next input data frame. The <code>nfft_we</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft_we</code> must be Bool.

Note: Both `xn_re` and `xn_im` signals should have the same data type.

Output Signals:

<code>xk_re</code>	real component of output data stream. <code>xk_re</code> is the same as the input <code>xn_re</code> for Scaled and Block Floating Point mode. The width of <code>xk_re</code> signal grows left from the <code>xn_re</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xk_im</code>	imaginary component of output data stream. <code>xk_im</code> is the same as the input <code>xn_im</code> for Scaled and Block Floating Point mode. The width of <code>xk_im</code> signal grows left from the <code>xn_im</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xn_index</code>	marks the index of the input data. The <code>xn_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>xk_index</code>	marks the index of the output data. The <code>xk_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>rfd</code>	active high after the <code>start</code> signal is asserted till the <code>xn_index</code> count reaches $N-1$. The <code>rfd</code> signal is marked as Bool.
<code>busy</code>	active high when the block is processing the current input data frame. The <code>busy</code> signal is marked as Bool.
<code>vout</code>	marks the output data as valid or invalid. <code>vout</code> signal is marked as Bool.
<code>edone</code>	active high one sample period before the block is ready to output the processed data frame. <code>edone</code> is marked as Bool.
<code>done</code>	active high when the block is ready to output the processed data frame. <code>done</code> is marked as Bool.
<code>ovflo</code>	marks the output data frame with active high signal if an overflow condition was detected while processing the input data frame in the Scaled mode. <code>ovflo</code> signal is marked as Bool.
<code>blk_exp</code>	specifies the exponent value for the output data frame in Block Floating Point mode. <code>blk_exp</code> is marked as an unsigned signal of width 5 with binary point at 0.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Implementation:** option to choose between Radix-4 Streaming I/O, Radix-4 Burst I/O, Radix-2 Minimum Resources or Pipelined Streaming I/O.
- **Number of Sample Points:** transform length, one of $N = 2^{(3..16)} = 8 - 65536$. The FFTx block supports sample points, 64 - 65536 for Radix-4 Streaming I/O, 8 - 65536 for Radix-4 Burst I/O, and 8 - 65536 for Radix-2 Minimum Resources and Pipelined Streaming I/O, implementation.
- **Output Ordering:** option to choose between bit reversed or natural order output.

- **Scaling:** option to select between Unscaled, Scaled and Block Floating Point output data types. The Block Floating Point option is not available for Pipelined Streaming I/O implementation.
- **Rounding Mode:** option to choose between Truncation and Convergent Rounding to be applied at the output of each rank.
- **Phase Factor Bit Width:** option to choose a value between 8 and 24, inclusive to be used as bit widths for phase factors.
- **Enable Dynamic Transform Size:** option to have optional input ports `nfft` and `nfft_we` for dynamically varying the point size of input data frames.
- **Provide Overflow Port:** option to have optional output ports `ovflo` when Scaled scaling option is selected.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Optimize for Speed Using DSP48:** In Virtex™-4 and Virtex-5, the complex multiplications and the butterfly additions/subtractions can be computed in Xtreme DSP™ slices.
 - ♦ **Butterfly arithmetic:** option to implement the additions and subtractions of the butterflies using DSP48's. This option is only available in Virtex-4, if the output width is less than or equal to 30. In Virtex-5, this feature is available for all output widths.
 - ♦ **Complex multiplication:** option to implement the complex multipliers built out of 4 real multipliers instead of 3. This allows the entire real complex multiplication to be calculated within the Xtreme DSP slices, resulting in faster clock speeds. Select this option for the largest increase in clock speed with a minimal increase in the number of extra DSP48's used. This option is only available for Virtex-4. In Virtex-5 it is always selected.
- **Phase factor memory type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Data memory type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Number of Stages Using Block RAM:** option to store data and phase factor in block ram and partially in distributed ram. This option is available only for Pipelined Streaming I/O implementation.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Block Timing

To better understand the FFT blocks control behavior and timing, please consult the core data sheet.

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Fast Fourier Transform:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FFT v4_1	Fast Fourier Transform	V4.1		•	•	•		•	•	•

FFT v5_0

This block is listed in the following Xilinx Blockset libraries: DSP and Index.



The FFT implements an efficient algorithm for computing the Discrete Fourier Transform (DFT).

The Xilinx FFT v5_0 block is supported for Virtex™-5, Virtex-4, Virtex-II Pro, Spartan™-3, Spartan-3E and Spartan-3A devices.

The N-point (where, $N = 2^m$, $m = 4 - 14$) forward or inverse DFT (IDFT) is computed on a vector of N complex values represented using data widths from 8 to 24, inclusive. The transform computation uses the Cooley-Tukey decimate-in-time algorithm as explained below.

Theory of Operation


The FFT is a computationally efficient algorithm for computing a Discrete Fourier Transform (DFT) of sample sizes that are a positive integer power of 2. The DFT of a sequence is defined as:

$$X(k) = \sum_{n=0}^{N-1} x(n)e^{-jnk2\pi/N} \quad k = 0, \dots, N-1$$

where N is the transform and j is the square root of -1. The inverse DFT (IDFT) is:

$$x(n) = \frac{1}{N} \sum_{k=0}^{N-1} X(k)e^{jnk2\pi/N} \quad n = 0, \dots, N-1$$

Block Interface

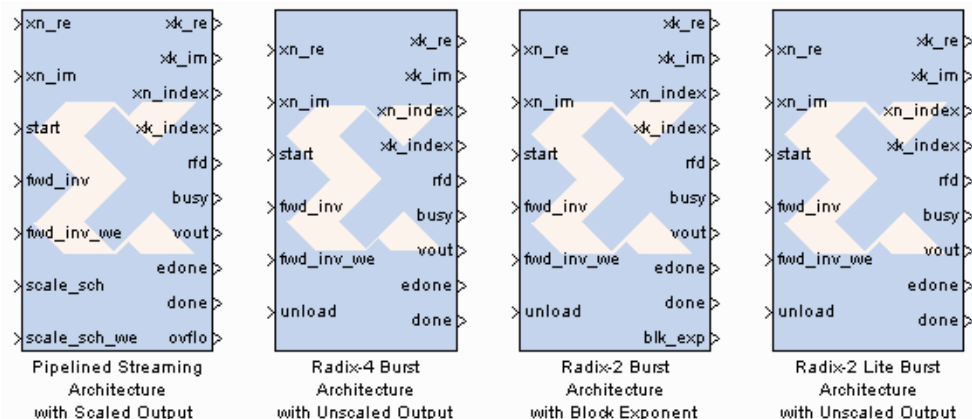

The block interface (inputs and outputs as seen on the FFT icon) for various implementation and scaling modes is as follows:

Input Signals:

<code>xn_re</code>	real component of input data stream. The signal driving <code>xn_re</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S</code> is a value between 8 and 24, inclusive. eg: <code>Fix_8_7</code> , <code>Fix_24_23</code>
<code>xn_im</code>	imaginary component of input data stream. The signal driving <code>xn_im</code> can be a signed data type of width <code>S</code> with binary point at <code>S-1</code> , where <code>S</code> is a value between 8 and 24, inclusive. eg: <code>Fix_8_7</code> , <code>Fix_24_23</code>
<code>start</code>	marks the beginning of each data frame. The <code>start</code> signal can be asserted as a pulse to start processing an input data frame or it can be tied to high. The signal driving <code>start</code> must be Bool.
<code>unload</code>	is used to read the output in natural order. The <code>unload</code> port is available only for implementing the Radix-4 Burst I/O, Radix-2 Burst I/O, or Radix-2 Lite Burst I/O architecture. The <code>unload</code> signal is sampled after the block is done processing the input frame. The block outputs data in natural order after the <code>unload</code> signal is asserted high. If the <code>start</code> signal is asserted before the <code>unload</code> signal, the block outputs data in bit reversed order. The signal driving <code>unload</code> must be Bool.
<code>fwd_inv</code>	0 for inverse transform, 1 for forward transform. The signal driving <code>fwd</code> must be Bool. By default, the FFT is configured for forward transform.
<code>fwd_inv_we</code>	when asserted, loads the transform type from the input port <code>fwd</code> for the next input data frame. The signal driving <code>fwd_we</code> must be Bool.
<code>nfft</code>	provides the point size for the next input data frame. The <code>nfft</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft</code> must be unsigned signal of width 5 with binary point at 0, <code>UFix_5_0</code> .
<code>nfft_we</code>	when asserted, resets the current operation of the block and loads the point size from the input port <code>nfft</code> for the next input data frame. The <code>nfft_we</code> port is available only when the checkbox for Enable Dynamic Transform Size is selected. The signal driving <code>nfft_we</code> must be Bool.
<code>cp_len</code>	provides the cyclic prefix length size for the next input data frame. The <code>cp_len</code> port is available only when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. The signal driving <code>cp_len</code> must be unsigned signal of width <code>N</code> with binary point at 0, where <code>N</code> is $\log_2$ of maximum number of sample points, <code>UFix_N_0</code> .
<code>cp_len_we</code>	when asserted, loads the cyclic prefix length from the input port <code>cp_len</code> for the next input data frame. The <code>cp_len_we</code> port is available only when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. The signal driving <code>cp_len_we</code> must be Bool
<code>scale_sch</code>	provides the scaling schedule to be used for the input data frame. The <code>scale_sch</code> port is available only for Fixed Point Scaled mode. The signal driving <code>scale_sch</code> must be unsigned signal of width <code>S</code> with binary point at 0, where, $S = 2 * \log_2 N$, for Radix-2 architectures, $2 * \text{ceil}(\log_2 N / 2)$, otherwise

`scale_sch_we` when asserted, loads the scaling schedule from the input port `scale_sch` for the next input data frame. The `scale_sch_we` port is available only for Fixed Point Scaled mode. The signal driving `scale_sch_we` must be Bool.

Note: Both `xn_re` and `xn_im` signals should have the same data type.

Output Signals:

<code>xk_re</code>	real component of output data stream. <code>xk_re</code> is the same as the input <code>xn_re</code> for Scaled and Block Floating Point mode. The width of <code>xk_re</code> signal grows left from the <code>xn_re</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xk_im</code>	imaginary component of output data stream. <code>xk_im</code> is the same as the input <code>xn_im</code> for Scaled and Block Floating Point mode. The width of <code>xk_im</code> signal grows left from the <code>xn_im</code> binary point in the Unscaled mode by $(1+\log_2 N)$.
<code>xn_index</code>	marks the index of the input data. The <code>xn_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>xk_index</code>	marks the index of the output data. The <code>xk_index</code> signal is marked as an unsigned signal of width $\log_2 N$ with binary point at 0.
<code>rfd</code>	active high after the <code>start</code> signal is asserted till the <code>xn_index</code> count reaches $N-1$. The <code>rfd</code> signal is marked as Bool.
<code>busy</code>	active high when the block is processing the current input data frame. The <code>busy</code> signal is marked as Bool.
<code>vout</code>	marks the output data as valid or invalid. <code>vout</code> signal is marked as Bool.
<code>edone</code>	active high one sample period before the block is ready to output the processed data frame. <code>edone</code> is marked as Bool.
<code>done</code>	active high when the block is ready to output the processed data frame. <code>done</code> is marked as Bool.
<code>cpv</code>	marks the output data as valid when cyclic prefix data is presented at the output. The <code>cpv</code> port is available only when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. <code>cpv</code> signal is marked as Bool
<code>rfs</code>	active high when the block is ready to process the start input to begin data loading. The <code>rfs</code> port is available only for Pipelined Streaming I/O implementation, when the checkbox for Cyclic prefix insertion is selected and the Output ordering is set to Natural Order. <code>rfs</code> signal is marked as Bool
<code>ovflo</code>	marks the output data frame with active high signal if an overflow condition was detected while processing the input data frame in the Scaled mode. <code>ovflo</code> signal is marked as Bool.
<code>blk_exp</code>	specifies the exponent value for the output data frame in Block Floating Point mode. <code>blk_exp</code> is marked as an unsigned signal of width 5 with binary point at 0.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Implementation:** option to choose between Radix-4 Streaming I/O, Radix-4 Burst I/O, Radix-2 Minimum Resources or Pipelined Streaming I/O.
- **Number of sample points:** transform length, one of $N = 2^{(3..16)} = 8 - 65536$. The FFTx block supports sample points, 64 - 65336 for Radix-4 Streaming I/O, 8 - 65336 for Radix-4 Burst I/O, and 8 - 65336 for Radix-2 Minimum Resources and Pipelined Streaming I/O, implementation.
- **Output mrdering:** option to choose between bit reversed or natural order output.
- **Scaling:** option to select between Unscaled, Scaled and Block Floating Point output data types. The Block Floating Point option is not available for Pipelined Streaming I/O implementation.
- **Rounding mode:** option to choose between Truncation and Convergent Rounding to be applied at the output of each rank.
- **Phase Factor Bit Width:** option to choose a value between 8 and 24, inclusive to be used as bit widths for phase factors.

Optional Ports

- **Cyclic prefix insertion:** option to have optional input ports `cp_len` and `cp_len_we` for dynamically specifying the cyclic prefix insertion for a transform output frame. Cyclic prefix insertion takes a section of the output of the FFT and prefixes it to the beginning of the transform. The resultant output data consists of the cyclic prefix (a copy of the end of the output data) followed by the complete output data, all in natural order. Cyclic prefix insertion is only available when output ordering is Natural Order.
- **Enable dynamic transform size:** option to have optional input ports `nfft` and `nfft_we` for dynamically varying the point size of input data frames.
- **Provide overflow port:** option to have optional output ports `ovflo` when Scaled scaling option is selected.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Optimize for Speed Using DSP48:** In Virtex™-4 and Virtex-5, the complex multiplications and the butterfly additions/subtractions can be computed in Xtreme DSP™ slices.
 - ♦ **Butterfly arithmetic:** option to implement the additions and subtractions of the butterflies using DSP48's. This option is only available in Virtex-4, if the output width is less than or equal to 30. In Virtex-5, this feature is available for all output widths.
 - ♦ **Complex multiplication:** option to implement the complex multipliers built out of 4 real multipliers instead of 3. This allows the entire real complex multiplication to be calculated within the Xtreme DSP slices, resulting in faster clock speeds. Select this option for the largest increase in clock speed with a

minimal increase in the number of extra DSP48's used. This option is only available for Virtex-4. In Virtex-5 it is always selected.

- **Phase factor memory type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Data memory type:** option to choose between Block RAM and Distributed RAM. This option is available only for sample points 16 till 1024. This option is not available for Pipelined Streaming I/O implementation.
- **Number of Stages Using Block RAM:** option to store data and phase factor in block ram and partially in distributed ram. This option is available only for Pipelined Streaming I/O implementation.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Block Timing

To better understand the FFT blocks control behavior and timing, please consult the core data sheet.

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Fast Fourier Transform:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FFT v5_0	Fast Fourier Transform	V5.0		•	•	•		•	•	•

FIFO

This block is listed in the following Xilinx Blockset libraries: *Control Logic, Memory, and Index.*



The Xilinx FIFO block implements a FIFO memory queue.

Values presented at the module's data-input port are written to the next available empty memory location when the write-enable input is one. By asserting the read-enable input port, data can be read out of the FIFO via the data output port (`dout`) in the order in which they were written. The FIFO can be implemented using block or distributed RAM.

The `full` output port is asserted to one when no unused locations remain in the module's internal memory. The `percent_full` output port indicates the percentage of the FIFO that is full, represented with user-specified precision. When the `empty` output port is asserted the FIFO is empty.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are:

- **Depth:** specifies the number of words that can be stored.
- **Bits of precision to use for %full signal:** specifies the bit width of the %full port. The binary point for this unsigned output is always at the top of the word. Thus, if for example precision is set to one, the output can take two values: 0.0 and 0.5, the latter indicating the FIFO is at least 50% full.


Implementation tab

- **Memory Type:** specifies how the FIFO is implemented in the FPGA; possible choices include block or distributed RAM.


Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

FIR Compiler 4.0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*



The Xilinx FIR Compiler 4.0 block implements a MAC-based or Distributed-Arithmetic FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration. The MAC-based filter is implemented using cascaded DSP48/DSP48E/DSP48A when available as shown in the figure below.

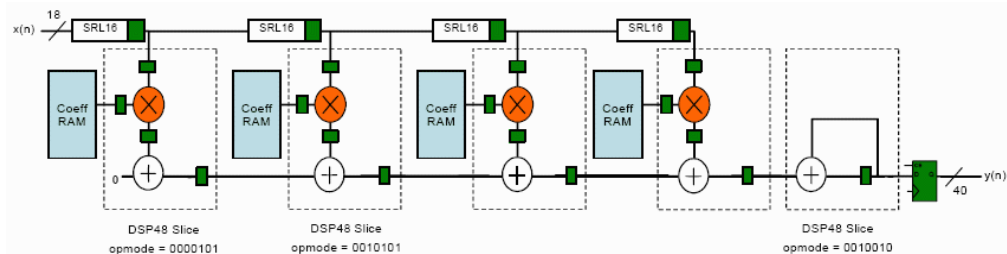


Note: In rest of this topic, DSP48/DSP48E/DSP48A will be referred to as DSP48.

Block Interface

The FIR Compiler 4.0 block can be configured to have a number of optional ports in addition to the **din** and **dout** ports which appear in all filter configurations.

Input Ports

- din**: data in port on the FIR Compiler. As shown below, the data for all channels is provided to the FIR Compiler in a time multiplexed manner through this port.

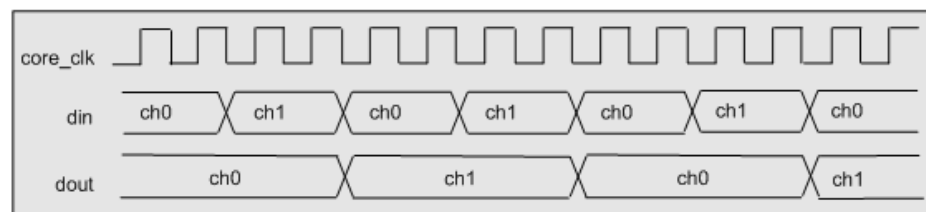

- rst**: synchronous reset port .
- en**: synchronous enable port.
- nd**: When this signal is asserted, the data sample presented on the **din** port is accepted into the filter core. **nd** should not be asserted while **rfd** is Low; any samples presented when **rfd** is Low are ignored by the core.
- filt_sel**: Filter Selection input signal, F-bit wide where $F = \text{ceil}(\log_2(\text{filter sets}))$. Only present when using multiple filter sets.
- coef_ld**: Indicates the beginning of a new coefficient reload cycle.
- coef_we**: Used for loading the coefficients into the filter to allow a host to halt loading until ready to transmit on the interface.

- **coef_din**: Input data bus for reloading coefficients. K is the core coefficient width for most filter types and coefficient width + 2 for interpolating filters where the symmetric coefficient structure is exploited.
- **coef_filt_sel**: Filter Selection input signal for reloading coefficients, F-bit wide where $F = \text{ceil}(\log_2(\text{filter sets}))$. Only present when using multiple filter sets and reloadable coefficients.

Output Ports

- **dout**: Note that for multi-channel implementations, this output is time-shared across all channels.
- **rdy**: Indicates that a new filter output sample is available on the **dout** port.
- **rfd**: Indicator to signal that the core is ready to accept a new data sample.
- **chan_in**: Standard binary count generated by the core that indicates the current filter input channel number.
- **chan_out**: Standard binary count generated by the core that indicates the current filter output channel number.
- **dout_i**: In-phase (I) data output component when using Hilbert transform.
- **dout_q**: Quadrature (Q) data output component when using Hilbert transform.
- **data_valid**: Output DATA VALID Indicator signal that can be used in conjunction with or in preference to **rdy**. The signal indicates that a new filter output sample is available on the **dout** port that has been generated from a complete data vector. Available for MAC-based FIR implementations

For more details, please refer to the LogiCORE™ data sheet

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Filter Specification tab

Parameters specific to the Filter Specification tab are as follows:

Filter Coefficients


- **Coefficients**: Specifies the coefficient vector as a single MATLAB row vector. The number of taps is inferred from the length of the MATLAB row vector. It is possible to enter these coefficients using the [FDATool](#) block as well.
- **Number of coefficients sets**: Specifies the number of different coefficient sets to be used. A value greater than 1 indicates that the multiple coefficient sets mode of the FIR compiler is being used.

Filter Specification

- **Filter type**:
 - ♦ **Single_Rate**: The data rate of the input and the output are the same.
 - ♦ **Interpolation**: The data rate of the output is faster than the input by a factor specified in **Sample rate change** parameter.
 - ♦ **Decimation**: The data rate of the output is slower than the input by a factor specified in the **Sample rate change** parameter.


- ♦ **Interpolated:** An interpolated FIR filter has a similar architecture to a conventional FIR filter, but with the unit delay operator replaced by k-1 units of delay. k is referred to as the zero-padding factor. The interpolated FIR should not be confused with an interpolation filter. Interpolated filters are single-rate systems employed to produce efficient realizations of narrow-band filters and, with some minor enhancements, wide-band filters can be accommodated. The data rate of the input and the output are the same.
- ♦ **Polyphase_Filter_Bank_Transmitter:** The polyphase filter bank implementation to efficiently consume and filter data that is output by Xilinx FFT core.
- ♦ **Polyphase_Filter_Bank_Receiver:** The polyphase filter bank implementation to efficiently consume and filter data that is input to the Xilinx FFT core.
- **Rate change type:**
 - ♦ **Integer:** Specifies that the rate change is an integer factor.
 - ♦ **Fixed_Fractional:** Specifies that the rate change is a fractional factor.
- **Interpolation rate value:** The data rate of the output is faster than the input by a factor specified in Sample rate change parameter.
- **Decimation rate value:** The data rate of the output is slower than the input by a factor specified in the **Sample rate change** parameter.
- **Zero pack factor:** Allows you to specify the number of 0's inserted between the coefficient specified by the coefficient vector. A zero packing factor of k inserts k-1 0s between the supplied coefficient values. This parameter is only active when the Filter type is set to Interpolated.
- **Number of channels:** The number of data channels to be processed by the FIR Compiler block. The multiple channel data is passed to the core in a time-multiplexed manner. A maximum of 64 channels is supported.
- **Effective input sample period:** Used to specify the effective input sample period when the nd has been selected or the Polyphase_Filter_Bank_Transmitter filter type has been selected. For all other filter types and control options, the sample period is taken from the input port properties of the filter's System Generator block. The effective input sample period is calculated by dividing the channel sample period by the number of channels being processed. In CoreGen terms this is equal to $\text{Clock\_Frequency} / (\text{Sample\_Frequency} * \text{Number\_Channels})$. This parameter will determine the folding factor in Systolic_Multiple_Accumulate fir filter.

The figure below shows the timing diagram for Polyphase_Filter_Bank_Transmitter and an example calculation for the Effective input sample period.

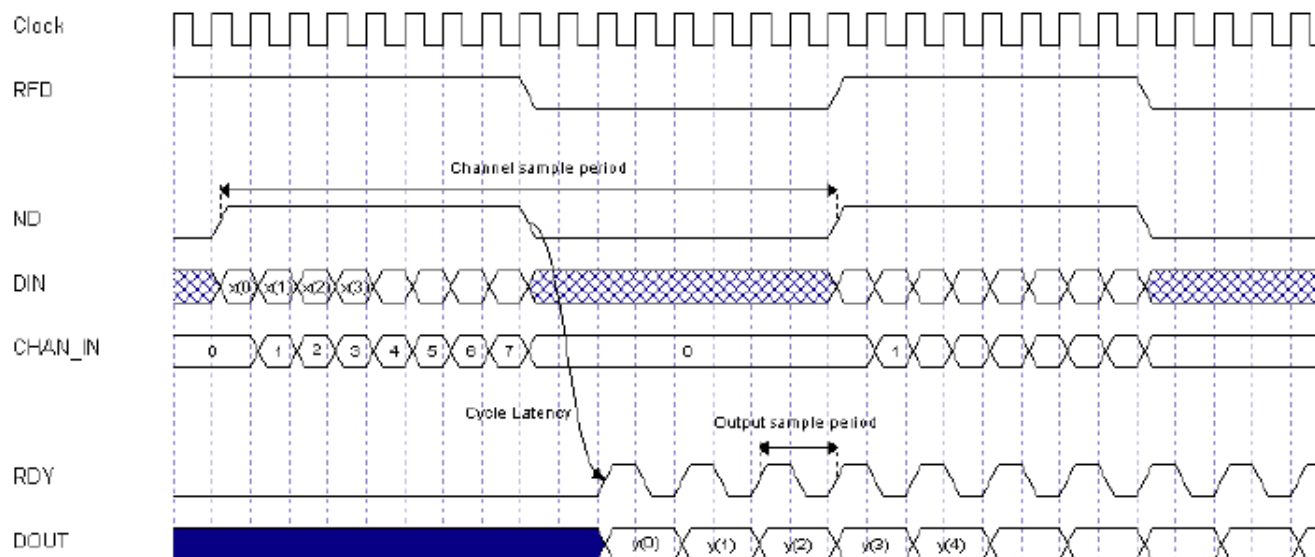

In the example shown above, there are 8 channels with a channel sample period of 16; this gives an effective input sample period of 2. The effective input sample period and output sample period will have the same value for the Polyphase Filter Bank Transmitter filter type.

The figure below demonstrates the input timing for a 3-Channel filter with the New Data port selected. In this example there is a channel sample period of 9 giving an effective sample period of 3. The input sample period, system clock period, interpolation and decimation rate determine the number of available clock cycles for data sample processing, which directly affects the level of parallelism in the core implementation.

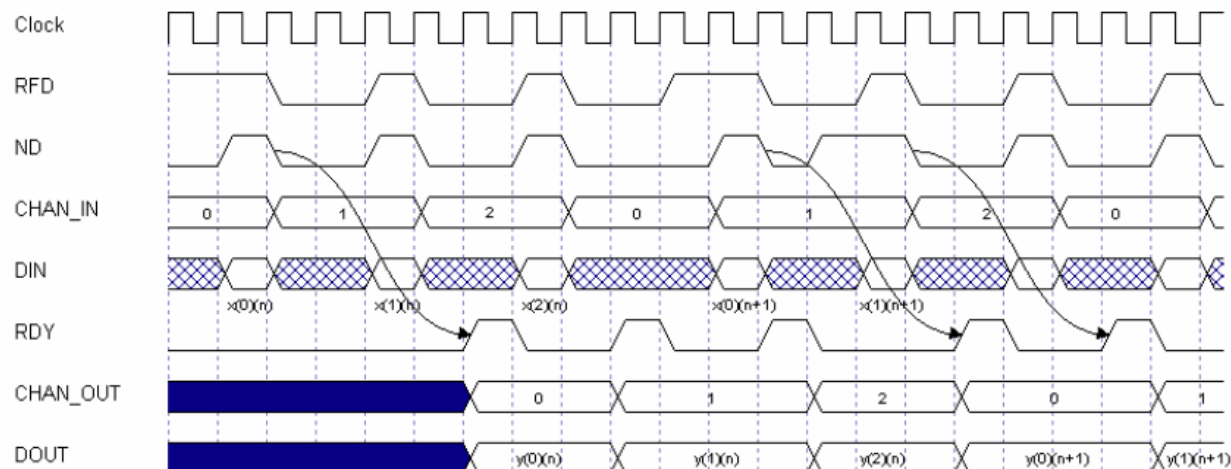

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Filter architecture** Choose one of the following:
 - ♦ **Systolic_Multiply_Accumulate:** This is a MAC-based architecture based on cascades of multiplier/DSP48s. This architecture is similar to the architectures supported by Sysgen block FIR Compiler v3.0/3.1/3.2
 - ♦ **Transpose_Multiply_Accumulate:** The Transpose Multiply-Accumulate architecture implements a Transposed Direct-Form filter.
 - ♦ **Distributed_Arithmetic:** Distributed Arithmetic FIR.

Coefficient Options

- **Use reloadable coefficients:** Check to add the coefficient reload ports to the block.
- **Coefficients Structure:** Specifies the coefficient structure. Depending on the coefficient structure optimizations are made in the core to reduce the amount of hardware required to implement a particular filter configuration. The selected structure can be any of the following:
 - ♦ Inferred
 - ♦ Non-Symmetric
 - ♦ Symmetric
 - ♦ Negative_Symmetric
 - ♦ Half_Band
 - ♦ Hilbert

The vector of coefficients specified must match the structure specified unless Inferred from coefficients is selected in which case the structure is determined automatically from these coefficients.

- **Coefficient type:** Specify Signed or Unsigned.
- **Quantization:** Specifies the quantization method to be used for quantizing the coefficients. This can be set to one of the following:
 - ♦ Integer_Coefficients
 - ♦ Quantize_Only
 - ♦ Maximize_Dynamic_Range
- **Coefficient width:** Specifies the number of bits used to represent the coefficients.
- **Coefficient fractional bits:** Specifies the binary point location in the coefficients datapath options
- **Number of paths:** Specifies the number of parallel data paths the filter is to process
- **Output rounding mode:** Choose one of the following:
 - ♦ Full_Precision
 - ♦ Truncate_LSBs
 - ♦ Non_Symmetric_Rounding_Down
 - ♦ Non_Symmetric_Rounding_Up
 - ♦ Symmetric_Rounding_to_Zero
 - ♦ Symmetric_Rounding_to_Infinity
 - ♦ Symmetric_Rounding_to_Even

- ◆ Symmetric_Rounding_to_Odd
- **Output width:** Specify the output width. Edit box activated only if the Rounding mode is set to a value other than **Full_Precision**.
- **Allow rounding approximation:** Check to specify that approximations can be used to save resources when using Symmetric_Rounding.

Detailed Implementation tab

Parameters specific to the Detailed Implementation tab are as follows:

- **Optimization goal:** Specifies if the core is required to operate at maximum possible speed ("Speed" option) or minimum area ("Area" option). The "Area" option is the recommended default and will normally achieve the best speed and area for the design, however in certain configurations, the "Speed" setting may be required to improve performance at the expense of overall resource usage (this setting normally adds pipeline registers in critical paths)
 - ◆ Area
 - ◆ Speed

Control Options

- **rst:** Provides a **rst** port on the block. This core always uses the `sclr_deterministic` option when using **rst**. Please refer to the LogiCORE™ data sheet for more information on the `sclr_deterministic` option.
- **Use deterministic rst behavior:** Allows fast simulation speeds when turned on. In this flow dout is held at 0 after reset until all the data-buffers are filled with post reset data. The use of this feature will result in additional core resources: a small amount of control logic and a counter used to determine when the data vector is complete. When **rst** is on and this control is off, simulation speeds are much slower but no extra logic is used to hold dout to 0.
- **en:** Provides `en` port on the block.
- **nd:** Has a `nd` (new data) input port.
- **data_valid:** Has a data valid output port.

Chan In options

- **Generate chan_in value in advance:** Specifies that the filter will generate the `CHAN_IN` value a number of input samples in advance.
- **Number of samples:** Specifies the number of inputs sample in advance that the `CHAN_IN` value will be generated.

Memory Options

The memory type for MAC implementations can either be user-selected or chosen automatically to suit the best implementation options. This option is disabled for DA-based architecture and is limited to Data and Coefficient Buffers for families which do not have DSP slices or Embedded Multipliers available, with no Automatic selection facility. Note that a choice of "Distributed" may result in a shift register implementation where appropriate to the filter structure. Forcing the RAM selection to be either Block or Distributed should be used with caution, as inappropriate use can lead to inefficient resource usage - the default Automatic mode is recommended for most applications.

- **Data buffer type:** Specifies the type of memory used to store data samples.
- **Coefficient buffer type:** Specifies the type of memory used to store the coefficients.

- **Input buffer type:** Specifies the type of memory to be used to implement the data input buffer, where present.
- **Output buffer type:** Specifies the type of memory to be used to implement the data output buffer, where present.
- **Preference for other storage:** Specifies the type of memory to be used to implement general storage in the datapath.

DSP Slice Column options

- **Multi column support:** For device families with DSP slices, implementations of large high speed filters might require chaining of DSP slice elements across multiple columns. Where applicable (the feature is only enabled for multi-column devices), the user can select the method of folding of the filter structure across the multiple-columns, which can be Automatic (based on the selected device for the project) or Custom (user selects length of first and subsequent columns)
 - ♦ **Disable**
 - ♦ **Automatic**
 - ♦ **Custom**
- **First column length:** Specifies the length of the first column in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
- **Column wrap length:** Specifies the length of subsequent columns in a multi-column DSP48 filter implementation. This value must be greater than or equal to the first column length specified. This control is only active when Multiple DSP48 column support is set to custom.
- **Inter column pipe length:** Specifies the length of the pipelines between columns in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ FIR Compiler:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FIR Compiler 4.0	FIR Compiler	V4.0		•	•	•		•	•	•


FIR Compiler v1_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*



The Xilinx Fir Compiler v1_0 block implements a high speed MAC-based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.


The filter is implemented using cascaded DSP48 slices as shown in the figure below.

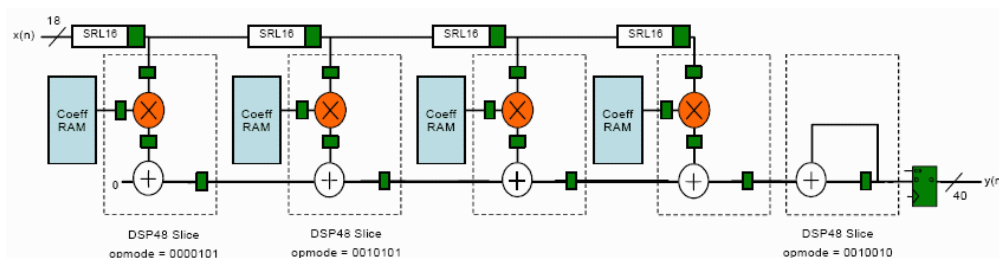


Block Interface

The FIR Compiler v1_0 block can be configured to have a number of optional ports in addition to **din** and **dout** ports which appear in all filter configurations.

- din**: data in port on the FIR Compiler. As shown below, the data for all channels is provided to the FIR Compiler in a time multiplexed manner through this port. This is a timing diagram for multichannel data input and output for a decimating filter with a sample rate change of 2 and hardware over-sampling of 2

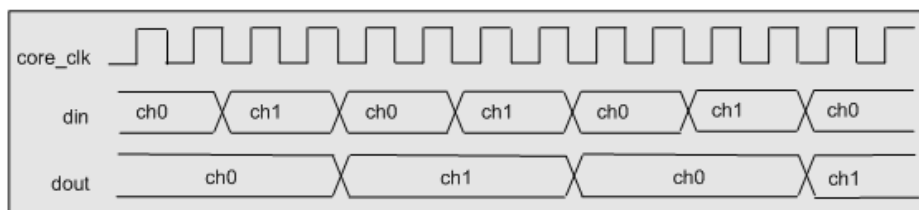

- vin**: valid in port. Marks each input on the **din** port as valid (high) or invalid (low). For multirate, multichannel filter cases, if the signal driving **vin** port is high for channel 0's data sample, then it must remain high until a corresponding sample for all the other channels has been clocked in (see figure below). In other words, a data sample for each channel from the first channel through to the final channel must be provided on consecutive clock cycles and the **vin** port must remain high over all these cycles. A simulation error will be reported if this rule is not adhered to.

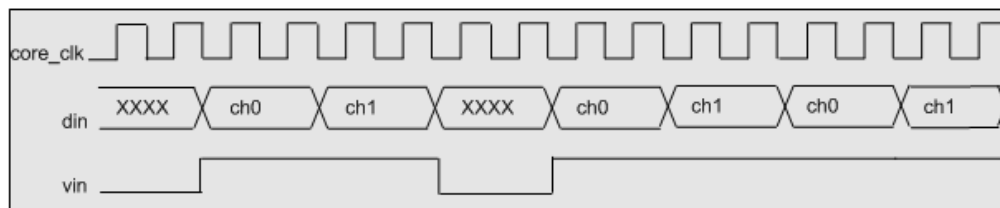

- **en**: synchronous enable port
- **rst**: synchronous reset port
- **rfd**: ready for data port. The output on this port goes high if the FIR block is ready to accept new input data.
- **dout**: data out port on the FIR compiler. Filtered output data for all the channels is provided through this port in a time multiplexed fashion.
- **vout**: indicates if the current output data on the dout port is valid (high) or invalid (low).
- **core_rdy**: control port to indicate when the block has initialized and is ready to accept data on the input ports. All inputs presented to the block will be ignored until core_rdy has been asserted by the core. This is a one shot control signal. It remains low at the start of the simulation and goes high after a time corresponding to the startup latency of the core. Once this signal goes high it will stay high for the remaining runtime. This port cannot be instanced if **rst** and **rfd** ports are used.
- **chan_out**: indicates which channel the current output data on the dout port belongs to.
- **chan_in**: indicates which channel's input data sample should be driven onto the din port next. As soon as the current input sample on din is clocked into the core the value on this output port will change indicating the next channel for which a data input is required

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Filter type**: Allows user to specify the filter as one of the following:
 - ♦ **SingleRate**: The data rate of the input and the output are the same.
 - ♦ **Decimation**: The data rate of the output is slower than the input by a factor specified in Sample rate change parameter
 - ♦ **Interpolation**: The data rate of the output is faster than the input by a factor specified in Sample rate change parameter
- **Sample rate change**: Allows you to specify the factor by which the sample rate of the output changes compared to input. This parameter is only active when the Filter Type is set to either Decimation or Interpolation. When Decimation is selected the sample rate of the output decreases with respect to the input by a factor equal to Sample rate change. When interpolation is selected the sample rate of the output increases with respect to the input by a factor equal to Sample rate change.
- **Number of channels**: The number of data channels to be processed by the Fir Compiler block. The multiple channel data is passed to the core in a time multiplexed manner. A maximum of 16 channels is supported.
- **Hardware over-sampling rate**: Specifies the ratio between the faster of input data rate and the output data rate versus the internal core rate. The over-clocking rate determines the number of filter taps folded onto each DSP48 in the filter.
- **Coefficient vector**: Specifies the coefficient vector as a single MATLAB row vector. The number of taps is inferred from the length of the MATLAB row vector. The

number of coefficients in a filter configuration, the specified coefficient structure and the hardware over-sampling factor determine the number of DSP48s instanced by the filter.

- **Coefficients Structure:** Specifies the coefficient structure. Depending on the coefficient structure optimizations are made in the core to reduce the amount of hardware required to implement a particular filter configuration. The selected structure can be any of the following:
 - ◆ Inferred from coefficients
 - ◆ Non-Symmetric
 - ◆ Symmetric
 - ◆ Negative-Symmetric
 - ◆ Half Band

The vector of coefficients specified must match the structure specified unless Inferred from Coefficients is selected in which case the structure is determined automatically from these coefficients.

Ports tab

Parameters specific to the Ports tab are as follows:

- **Provide valid ports:** Provides `vin` and `vout` ports on the block.
- **Provide core_rdy port(Ports):** Provides an output port on the block which is low initially for a number of cycles equal to the start up latency of the core. After this signal is driven high the core has completed its initialization sequence and is able to accept input data. Refer to the data sheet for more information on the startup latency.
- **Provide rst and rfd ports(Ports):** Provides `rst` and `rfd` ports on the block.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Storage options:** Allows custom memory options to be selected for the storage of both coefficients and data.
 - ◆ **Data buffer:** Specifies the type of memory used to store data samples.
 - ◆ **Coefficient buffer:** Specifies the type of memory used to store the coefficients.
- **Multiple DSP48 column support:** Specifies the method for implementing filters over multiple columns of DSP48 slices in a Virtex™-4 device. Custom mode allows you to specify an exact multi-column implementation and setting this control to disabled turns off all support for multi-column implementations.
 - ◆ **Cross column pipelining:** Specifies the length of the pipelines between columns in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ◆ **First column length:** Specifies the length of the first column in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ◆ **Column wrap length:** Specifies the length of subsequent columns in a multi-column DSP48 filter implementation. This value must be greater than or equal to the first column length specified. This control is only active when Multiple DSP48 column support is set to custom.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ FIR Compiler:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FIR Compiler v1_0	FIR Compiler	V1.0	•	•			•	•	•	

Known Issues


The following known issues are associated with certain features of Fir Compiler in SysGen:

- Currently the FIR Compiler block only supports Mac Fir for Virtex™-4 devices.
- There is no support for re-loadable coefficients or multiple coefficient sets
- There is no automatic multi-column support
- There is support only for a maximum of 512 taps
- If a design containing the block simulates but produces the error reproduced below during netlist phase then refer to the coregen.log file located in \$target_directory/sysgen/coregen_XXXX/coregen_tmp:

```
standard exception: XNetlistEngine: An exception
was raised: com.xilinx.sysgen.netlist.f: ERROR:
coreutil - Failure to generate output products
at C:/MATLAB701/toolbox/xilinx/sysgen/scripts/
SgGenerateCores.pm line 590
$target_directory refers to the netlist target directory as specified
on the SysGen token.
```


FIR Compiler v2_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*



The Xilinx Fir Compiler v2_0 block implements a high speed MAC based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.


The filter is implemented using cascaded DSP48 slices as shown in the figure below.

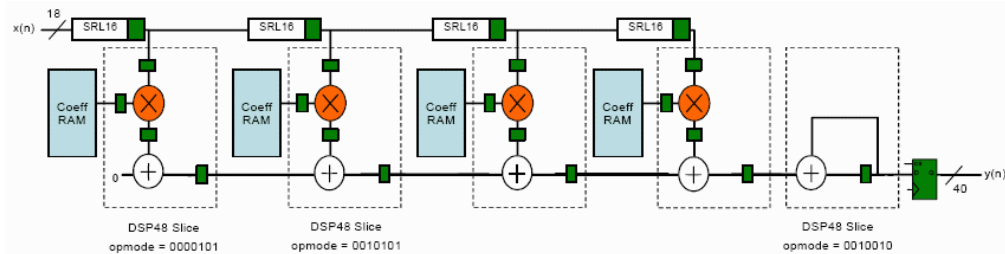


Block Interface

The FIR Compiler v1_0 block can be configured to have a number of optional ports in addition to **din** and **dout** ports which appear in all filter configurations.

- din**: data in port on the FIR Compiler. As shown below, the data for all channels is provided to the FIR Compiler in a time multiplexed manner through this port. This is a timing diagram for multichannel data input and output for a decimating filter with a sample rate change of 2 and hardware over-sampling of 2

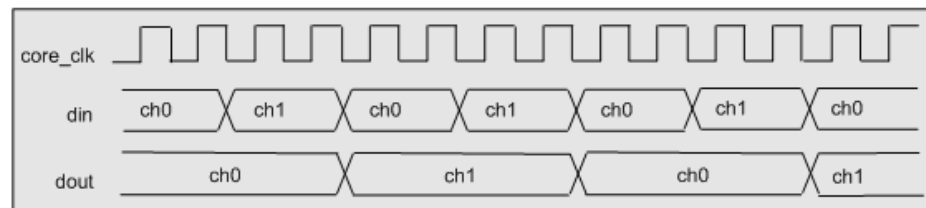

- vin**: valid in port. Marks each input on the din port as valid (high) or invalid (low). For multirate, multichannel filter cases, if the signal driving **vin** port is high for channel 0's data sample, then it must remain high until a corresponding sample for all the other channels has been clocked in. In other words, a data sample for each channel from the first channel through to the final channel must be provided on consecutive clock cycles and the **vin** port must remain high over all these cycles. A simulation error will be reported if this rule is not adhered to.

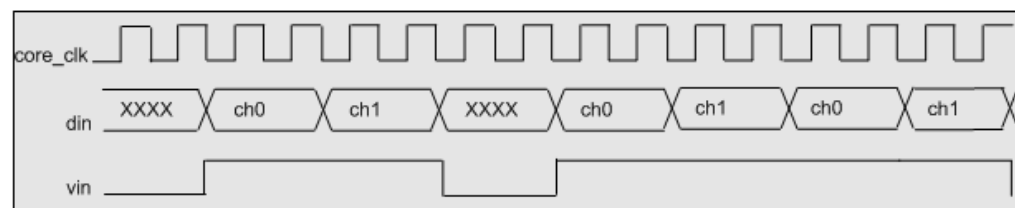

- **en:** synchronous enable port
- **rst:** synchronous reset port
- **rfd:** ready for data port. The output on this port goes high if the FIR block is ready to accept new input data.
- **dout:** data out port on the FIR compiler. Filtered output data for all the channels is provided through this port in a time multiplexed fashion.
- **vout:** indicates if the current output data on the dout port is valid(high) or invalid(low).
- **core_rdy:** control port to indicate when the block has initialized and is ready to accept data on the input ports. All inputs presented to the block will be ignored until core_rdy has been asserted by the core. This is a one shot control signal. It remains low at the start of the simulation and goes high after a time corresponding to the startup latency of the core. Once this signal goes high it will stay high for the remaining runtime. This port cannot be instanced if rst and rfd ports are used.
- **chan_out:** indicates which channel the current output data on the dout port belongs to.
- **chan_in:** indicates which channel's input data sample should be driven onto the din port next. As soon as the current input sample on din is clocked into the core the value on this output port will change indicating the next channel for which a data input is required

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Filter type:** Allows user to specify the filter as one of the following:
 - ♦ **SingleRate:** The data rate of the input and the output are the same.
 - ♦ **Decimation:** The data rate of the output is slower than the input by a factor specified in Sample rate change parameter
 - ♦ **Interpolation:** The data rate of the output is faster than the input by a factor specified in Sample rate change parameter
- **Sample rate change:** Allows you to specify the factor by which the sample rate of the output changes compared to input. This parameter is only active when the Filter Type is set to either Decimation or Interpolation. When Decimation is selected the sample rate of the output decreases with respect to the input by a factor equal to Sample rate change. When interpolation is selected the sample rate of the output increases with respect to the input by a factor equal to Sample rate change.
- **Number of channels:** The number of data channels to be processed by the Fir Compiler block. The multiple channel data is passed to the core in a time multiplexed manner. A maximum of 16 channels is supported.
- **Hardware over-sampling rate:** Specifies the ratio between the faster of input data rate and the output data rate versus the internal core rate. The overclocking rate determines the number of filter taps folded onto each DSP48 in the filter.
- **Coefficient vector:** Specifies the coefficient vector as a single MATLAB row vector. The number of taps is inferred from the length of the MATLAB row vector. The

number of coefficients in a filter configuration, the specified coefficient structure and the hardware over-sampling factor determine the number of DSP48s instanced by the filter.

- **Coefficients Structure:** Specifies the coefficient structure. Depending on the coefficient structure optimizations are made in the core to reduce the amount of hardware required to implement a particular filter configuration. The selected structure can be any of the following:
 - ◆ Inferred from coefficients
 - ◆ Non-Symmetric
 - ◆ Symmetric
 - ◆ Negative-Symmetric
 - ◆ Half Band

The vector of coefficients specified must match the structure specified unless Inferred from Coefficients is selected in which case the structure is determined automatically from these coefficients.

Ports tab

Parameters specific to the Ports tab are as follows:

- **Provide valid ports:** Provides `vin` and `vout` ports on the block.
- **Provide core_rdy port(Ports):** Provides an output port on the block which is low initially for a number of cycles equal to the start up latency of the core. After this signal is driven high the core has completed its initialization sequence and is able to accept input data. Refer to the data sheet for more information on the startup latency.
- **Provide rst and rfd ports(Ports):** Provides `rst` and `rfd` ports on the block.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Storage options:** Allows custom memory options to be selected for the storage of both coefficients and data.
 - ◆ **Data buffer:** Specifies the type of memory used to store data samples.
 - ◆ **Coefficient buffer:** Specifies the type of memory used to store the coefficients.
- **Multiple DSP48 column support:** Specifies the method for implementing filters over multiple columns of DSP48 slices in a Virtex™-4 device. Custom mode allows you to specify an exact multi-column implementation and setting this control to disabled turns off all support for multi-column implementations.
 - ◆ **Cross column pipelining:** Specifies the length of the pipelines between columns in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ◆ **First column length:** Specifies the length of the first column in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ◆ **Column wrap length:** Specifies the length of subsequent columns in a multi-column DSP48 filter implementation. This value must be greater than or equal to the first column length specified. This control is only active when Multiple DSP48 column support is set to custom.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ FIR Compiler:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
FIR Compiler v2_0	FIR Compiler	V2.0	•	•			•	•	•	•

Known Issues

The following known issues are associated with certain features of Fir Compiler in SysGen:


- Currently the FIR Compiler block only supports Mac Fir for Virtex 4 devices.
- There is no support for re-loadable coefficients or multiple coefficient sets
- There is no automatic multi-column support
- There is no automatic multi-column support
- There is support only for a maximum of 512 taps
- If a design containing the block simulates but produces the error reproduced below during netlist phase then refer to the coregen.log file located in \$target_directory/sysgen/coregen_XXXX/coregen_tmp:

```
standard exception: XNetlistEngine: An exception
was raised: com.xilinx.sysgen.netlist.f: ERROR:
coreutil - Failure to generate output products
at C:/MATLAB701/toolbox/xilinx/sysgen/scripts/
SgGenerateCores.pm line 590
```

\$target_directory refers to the netlist target directory as specified on the SysGen token.


FIR Compiler v3_0

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*



The Xilinx Fir Compiler v3_0 block implements a high speed MAC based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.

The filter is implemented using cascaded DSP48/DSP48E/DSP48A slices as shown in the figure below.

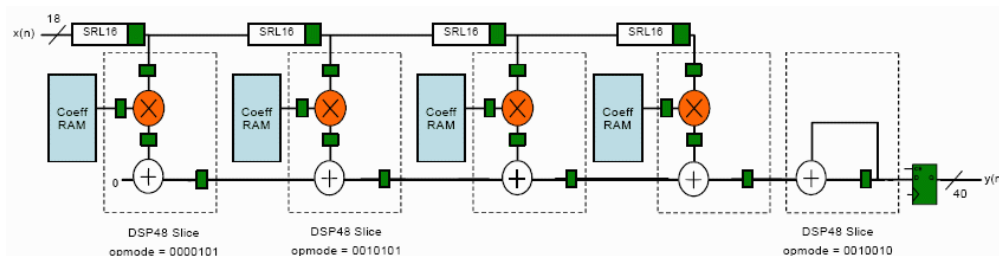


In rest of this topic, DSP48/DSP48E /DSP48A will be referred to as DSP48.


Block Interface

The FIR Compiler v3_0 block can be configured to have a number of optional ports in addition to `din` and `dout` ports which appear in all filter configurations. The first data is consumed by the FIR compiler when the core is ready. This can be inferred by monitoring the `core_rdy` signal which has been described in this section.

- **din**: data in port on the FIR Compiler. As shown below, the data for all channels is provided to the FIR Compiler in a time multiplexed manner through this port.

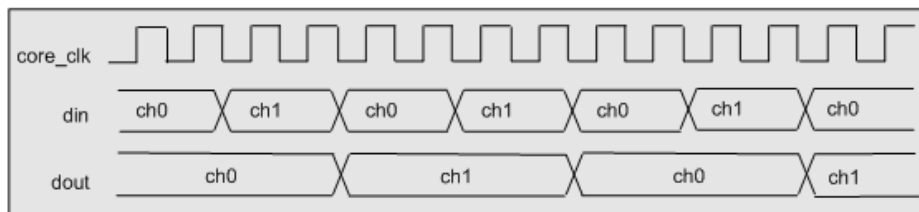


- **vin**: valid in port. Marks each input on the `din` port as valid (high) or invalid (low).

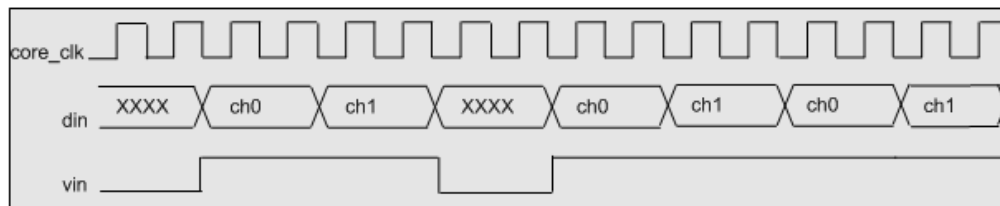

- **en**: synchronous enable port
- **rst**: synchronous reset port
- **dout**: data out port on the FIR compiler. Filtered output data for all the channels is provided through this port in a time multiplexed fashion.
- **vout**: indicates if the current output data on the **dout** port is valid(high) or invalid(low).
- **chan_out**: indicates which channel the current output data on the **dout** port belongs to.
- **chan_in**: indicates which channel's input data sample should be driven onto the **din** port next. As soon as the current input sample on **din** is clocked into the core, the value on this output port will change indicating the next channel for which a data input is required.
- **coef_ld**: coefficient load port. The signal driving **coef_ld** must be boolean. For more information on the **coef_ld** port, refer to the section below on re-loadable coefficients.
- **coef_we**: coefficient write enable port. The signal driving **coef_we** must be boolean. For more information on the **coef_we** port, refer to the section below on re-loadable coefficients.
- **coef_din**: coefficient data input port. The signal driving **coef_din** must have a type identical to the one specified for coefficients in the block mask. For more information on the **coef_din** port, refer to the section below on re-loadable coefficients.

Reloading Coefficients

The FIR Compiler allows for reloading new coefficient sets dynamically. Three ports **coef_ld**, **coef_we**, and **coef_din**, are used to accomplish this. The timing relationship between the signals on various ports is shown below:

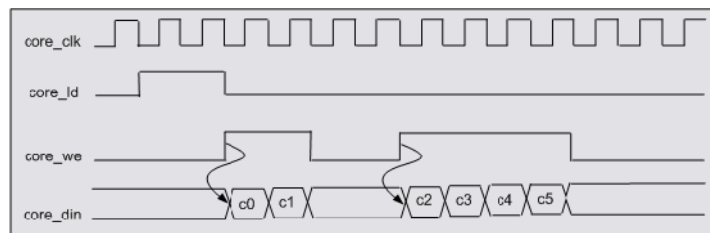

The **core_we** signal can go high at any time after the falling edge of **coef_ld** signal. This initiates the loading of the coefficients. Also observe that all coefficients need not be loaded continuously. When the last coefficient is loaded, after a delay of two **core_clk** cycles (a delay of one in the case of halfband filter coefficients), the new set of coefficients becomes active.

The order that the FIR filter is loaded is determined by the configuration of the FIR Compiler. A utility function called **xlGetReloadOrder** is also provided to determine this order.

xlGetReloadOrder

xlGetReloadOrder is a MATLAB utility function that returns the mapping between the time order of the reloaded coefficient and their tap position in the FIR filter. The function **xlGetReloadOrder** accepts the following arguments:

- **n_taps**: number of filter taps in the FIR Compiler
- **coef_struct**: Specifies the coefficient structure. It can take one of the following String values
 - ◆ 'Symmetric'
 - ◆ 'Negative-Symmetric'
 - ◆ 'Halfband'
 - ◆ 'Non-Symmetric'
- **filter_type**: Specifies the type of filter being used. It can take one of the following numeric values
 - ◆ 'SingleRate'
 - ◆ 'Decimation'
 - ◆ 'Interpolation'
- **rate_change**: Interpolation or decimation rate change (1-16)
- **overclock**: overclocking factor (1 – n_taps)
- **multiple_column_support**: Disable or custom specify multiple column support
 - ◆ 'Disabled'
 - ◆ 'Custom'
- **first_column_length**: Integer specifying the first column length when multiple column support is enabled
- **column_wrap_length**: Integer specifying the column wrap length when multiple column support is specified

For example, the coefficient reload order of an FIR Compiler block configured as a 16-tap symmetric coefficients decimate by 2 filter, which is overclocked by 2 can be obtained as shown below:

```
>> xlGetReloadOrder( 16, 'Symmetric', 'Decimation', 2, 2, 'Disabled',
4, 32)
ans =
     5
     7
     4
     6
     1
     3
     0
     2
```

The utility returns a vector that captures the reload order. The first element of the vector here is 5. This implies that the first coefficient passed to the Fir Compiler forms the 5th tap of the FIR filter (and hence also the 10th because the filter has symmetric coefficient structure). Similarly the second element value is 7 which denotes that the 2nd coefficient passed to the FIR Compiler forms the 7th(and also 8th) tap of the FIR filter.

Symmetric Interpolation

Symmetric interpolation cases have a reload scheme that is different from all the others in that the coefficients are loaded in a combined manner. Under this configuration the `xlGetReloadOrder` returns a string describing the combination:

```
>> xlGetReloadOrder(16, 'Symmetric', 'Interpolation', 2, 2, 'Disabled',
4, 32)
```

```
ans =
{4 - 5} {6 - 7} {4 + 5} {6 + 7} {0 - 1} {2 - 3} {0 + 1} {2 + 3}
```

The above string implies that the first sample clocked into the `coef_din` port is interpreted as the difference between coefficient 4 and coefficient 5. The second sample is interpreted as the difference between coefficient 6 and coefficient 7.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

MODE

- **Filter type:** Allows you to specify the filter as one of the following:
 - ♦ **SingleRate:** The data rate of the input and the output are the same.
 - ♦ **Decimation:** The data rate of the output is slower than the input by a factor specified in the **Sample rate change** parameter
 - ♦ **Interpolation:** The data rate of the output is faster than the input by a factor specified in Sample rate change parameter
 - ♦ **Interpolated:** An interpolated FIR filter has a similar architecture to a conventional FIR filter, but with the unit delay operator replaced by k-1 units of delay. k is referred to as the zero-packing factor. The interpolated FIR should not be confused with an interpolation filter. Interpolated filters are single-rate systems employed to produce efficient realizations of narrow-band filters and, with some minor enhancements, wide-band filters can be accommodated. The data rate of the input and the output are the same
- **Sample rate change:** Allows you to specify the factor by which the sample rate of the output changes compared to the input. This parameter is only active when the **Filter type** is set to either Decimation or Interpolation. When Decimation is selected, the sample rate of the output decreases with respect to the input by a factor equal to Sample rate change. When Interpolation is selected, the sample rate of the output increases with respect to the input by a factor equal to the Sample rate change.
- **Zero packing factor:** Allows you to specify the number of 0's inserted between the coefficient specified by the coefficient vector. A zero packing factor of k inserts k-1 0s between the supplied coefficient values. This parameter is only active when the Filter type is set to Interpolated.
- **Number of channels:** The number of data channels to be processed by the FIR Compiler block. The multiple channel data is passed to the core in a time multiplexed manner. A maximum of 64 channels is supported.
- **Hardware over-sampling rate:** Specifies the ratio between the faster of input data rate and the output data rate versus the internal core rate. The overclocking rate determines the number of filter taps folded onto each DSP48 in the filter.
- **Coefficients**
- **Coefficient vector:** Specifies the coefficient vector as a single MATLAB row vector. The number of taps is inferred from the length of the MATLAB row vector. The number of coefficients in a filter configuration, the specified coefficient structure and

the hardware over-sampling factor determine the number of DSP48s instanced by the filter. It is possible to enter these coefficients using the [FDATool](#) block as well.

- **Coefficients Structure:** Specifies the coefficient structure. Depending on the coefficient structure optimizations are made in the core to reduce the amount of hardware required to implement a particular filter configuration. The selected structure can be any of the following:
 - ◆ Inferred from coefficients
 - ◆ Non-Symmetric
 - ◆ Symmetric
 - ◆ Negative-Symmetric
 - ◆ Half Band

The vector of coefficients specified must match the structure specified unless Inferred from coefficients is selected in which case the structure is determined automatically from these coefficients.

Ports tab

Parameters specific to the Ports tab are as follows:

- **Provide valid ports:** Provides `vin` and `vout` ports on the block.
- **Provide rst and rfd ports(Ports):** Provides `rst` and `rfd` ports on the block.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Storage options:** Allows custom memory options to be selected for the storage of both coefficients and data.
 - ◆ **Data buffer:** Specifies the type of memory used to store data samples.
 - ◆ **Coefficient buffer:** Specifies the type of memory used to store the coefficients.
- **Multiple DSP48 column support:** Specifies the method for implementing filters over multiple columns of DSP48 slices in a Virtex™-4 device. Custom mode allows you to specify an exact multi-column implementation and setting this control to disabled turns off all support for multi-column implementations.
 - ◆ **Cross column pipelining:** Specifies the length of the pipelines between columns in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ◆ **First column length:** Specifies the length of the first column in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ◆ **Column wrap length:** Specifies the length of subsequent columns in a multi-column DSP48 filter implementation. This value must be greater than or equal to the first column length specified. This control is only active when Multiple DSP48 column support is set to custom.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ FIR Compiler:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FIR Compiler v3_0	FIR Compiler	V3.0	•	•	•	•	•	•	•	•


Known Issues

The following known issues are associated with certain features of Fir Compiler in SysGen:

- Currently the FIR Compiler block only supports Mac Fir for Virtex™-4, Virtex-5, and Spartan™-3A DSP devices
- There is no automatic multi-column support
- Simulation speed may vary depending on the configuration


FIR Compiler v3_1

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*



The Xilinx Fir Compiler v3_1 block implements a high speed MAC based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.

The filter is implemented using cascaded DSP48/DSP48E/DSP48A slices as shown in the figure below.

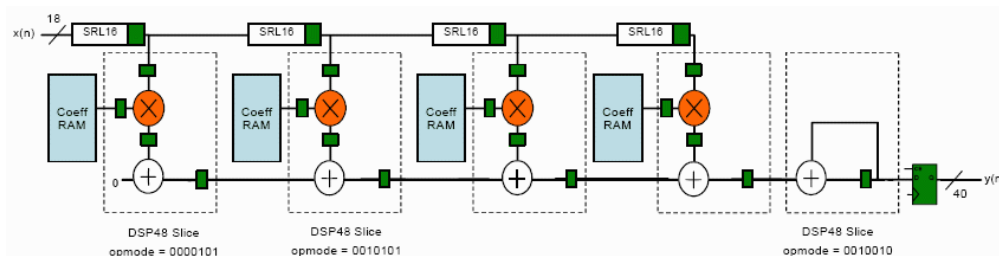


In rest of this topic, DSP48/DSP48E/DSP48A will be referred to as DSP48.


Block Interface

The FIR Compiler v3_1 block can be configured to have a number of optional ports in addition to `din` and `dout` ports which appear in all filter configurations. The first data is consumed by the FIR compiler when the core is ready. This can be inferred by monitoring the `core_rdy` signal which has been described in this section.

- **din**: data in port on the FIR Compiler. As shown below, the data for all channels is provided to the FIR Compiler in a time multiplexed manner through this port.

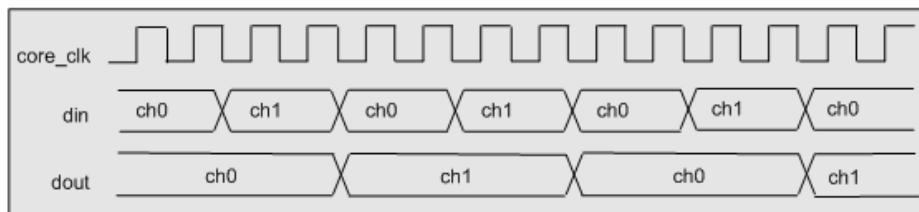


- **vin**: valid in port. Marks each input on the `din` port as valid (high) or invalid (low).

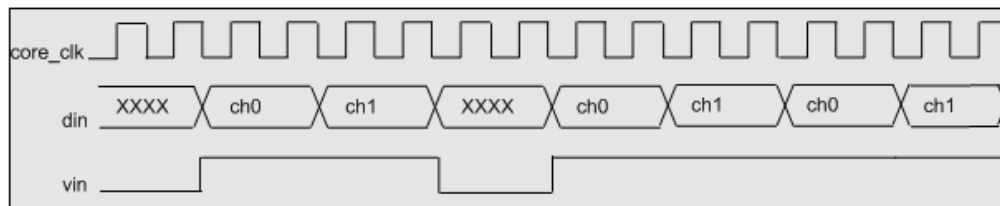

- **en**: synchronous enable port
- **rst**: synchronous reset port
- **dout**: data out port on the FIR compiler. Filtered output data for all the channels is provided through this port in a time multiplexed fashion.
- **vout**: indicates if the current output data on the **dout** port is valid(high) or invalid(low).
- **chan_out**: indicates which channel the current output data on the **dout** port belongs to.
- **chan_in**: indicates which channel's input data sample should be driven onto the **din** port next. As soon as the current input sample on **din** is clocked into the core, the value on this output port will change indicating the next channel for which a data input is required.
- **coef_ld**: coefficient load port. The signal driving **coef_ld** must be boolean. For more information on the **coef_ld** port, refer to the section below on re-loadable coefficients.
- **coef_we**: coefficient write enable port. The signal driving **coef_we** must be boolean. For more information on the **coef_we** port, refer to the section below on re-loadable coefficients.
- **coef_din**: coefficient data input port. The signal driving **coef_din** must have a type identical to the one specified for coefficients in the block mask. For more information on the **coef_din** port, refer to the section below on re-loadable coefficients.

Reloading Coefficients

The FIR Compiler allows for reloading new coefficient sets dynamically. Three ports **coef_ld**, **coef_we**, and **coef_din**, are used to accomplish this. The timing relationship between the signals on various ports is shown below:

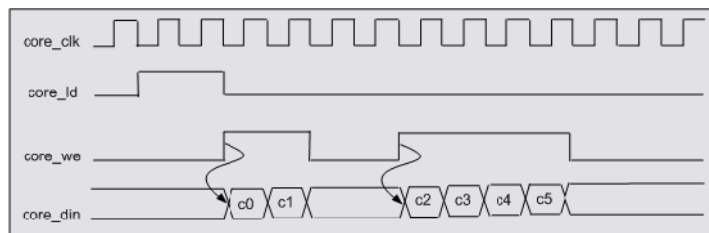

The **core_we** signal can go high at any time after the falling edge of **coef_ld** signal. This initiates the loading of the coefficients. Also observe that all coefficients need not be loaded continuously. When the last coefficient is loaded, after a delay of two **core_clk** cycles (a delay of one in the case of halfband filter coefficients), the new set of coefficients becomes active.

The order that the FIR filter is loaded is determined by the configuration of the FIR Compiler. A utility function called **xlGetReloadOrder** is also provided to determine this order.

xlGetReloadOrder

xlGetReloadOrder is a MATLAB utility function that returns the mapping between the time order of the reloaded coefficient and their tap position in the FIR filter. The function **xlGetReloadOrder** accepts the following arguments:

- **n_taps**: number of filter taps in the FIR Compiler
- **coef_struct**: Specifies the coefficient structure. It can take one of the following String values
 - ◆ 'Symmetric'
 - ◆ 'Negative-Symmetric'
 - ◆ 'Halfband'
 - ◆ 'Non-Symmetric'
- **filter_type**: Specifies the type of filter being used. It can take one of the following numeric values
 - ◆ 'SingleRate'
 - ◆ 'Decimation'
 - ◆ 'Interpolation'
- **rate_change**: Interpolation or decimation rate change (1-16)
- **overclock**: overclocking factor (1 – n_taps)
- **multiple_column_support**: Disable or custom specify multiple column support
 - ◆ 'Disabled'
 - ◆ 'Custom'
- **first_column_length**: Integer specifying the first column length when multiple column support is enabled
- **column_wrap_length**: Integer specifying the column wrap length when multiple column support is specified

For example, the coefficient reload order of an FIR Compiler block configured as a 16-tap symmetric coefficients decimate by 2 filter, which is overclocked by 2 can be obtained as shown below:

```
>> xlGetReloadOrder( 16, 'Symmetric', 'Decimation', 2, 2, 'Disabled',
4, 32)
ans =
     5
     7
     4
     6
     1
     3
     0
     2
```

The utility returns a vector that captures the reload order. The first element of the vector here is 5. This implies that the first coefficient passed to the Fir Compiler forms the 5th tap of the FIR filter (and hence also the 10th because the filter has symmetric coefficient structure). Similarly the second element value is 7 which denotes that the 2nd coefficient passed to the FIR Compiler forms the 7th(and also 8th) tap of the FIR filter.

Symmetric Interpolation

Symmetric interpolation cases have a reload scheme that is different from all the others in that the coefficients are loaded in a combined manner. Under this configuration the `xlGetReloadOrder` returns a string describing the combination:

```
>> xlGetReloadOrder(16, 'Symmetric', 'Interpolation', 2, 2, 'Disabled',
4, 32)
```



```
ans =
{4 - 5} {6 - 7} {4 + 5} {6 + 7} {0 - 1} {2 - 3} {0 + 1} {2 + 3}
```

The above string implies that the first sample clocked into the `coef_din` port is interpreted as the difference between coefficient 4 and coefficient 5. The second sample is interpreted as the difference between coefficient 6 and coefficient 7.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

MODE

- **Filter type:** Allows you to specify the filter as one of the following:
 - ♦ **SingleRate:** The data rate of the input and the output are the same.
 - ♦ **Decimation:** The data rate of the output is slower than the input by a factor specified in the **Sample rate change** parameter
 - ♦ **Interpolation:** The data rate of the output is faster than the input by a factor specified in Sample rate change parameter
 - ♦ **Interpolated:** An interpolated FIR filter has a similar architecture to a conventional FIR filter, but with the unit delay operator replaced by $k-1$ units of delay. k is referred to as the zero-padding factor. The interpolated FIR should not be confused with an interpolation filter. Interpolated filters are single-rate systems employed to produce efficient realizations of narrow-band filters and, with some minor enhancements, wide-band filters can be accommodated. The data rate of the input and the output are the same

- **Sample rate change:** Allows you to specify the factor by which the sample rate of the output changes compared to the input. This parameter is only active when the **Filter type** is set to either Decimation or Interpolation. When Decimation is selected, the sample rate of the output decreases with respect to the input by a factor equal to Sample rate change. When Interpolation is selected, the sample rate of the output increases with respect to the input by a factor equal to the Sample rate change.
- **Zero packing factor:** Allows you to specify the number of 0's inserted between the coefficient specified by the coefficient vector. A zero packing factor of k inserts k-1 0s between the supplied coefficient values. This parameter is only active when the Filter type is set to Interpolated.
- **Number of channels:** The number of data channels to be processed by the FIR Compiler block. The multiple channel data is passed to the core in a time multiplexed manner. A maximum of 64 channels is supported.
- **Hardware over-sampling rate:** Specifies the ratio between the faster of input data rate and the output data rate versus the internal core rate. The overclocking rate determines the number of filter taps folded onto each DSP48 in the filter.

Coefficients

- **Coefficient vector:** Specifies the coefficient vector as a single MATLAB row vector. The number of taps is inferred from the length of the MATLAB row vector. The number of coefficients in a filter configuration, the specified coefficient structure and the hardware over-sampling factor determine the number of DSP48s instantiated by the filter. It is possible to enter these coefficients using the [FDATool](#) block as well.
- **Coefficients Structure:** Specifies the coefficient structure. Depending on the coefficient structure optimizations are made in the core to reduce the amount of hardware required to implement a particular filter configuration. The selected structure can be any of the following:
 - ♦ Inferred from coefficients
 - ♦ Non-Symmetric
 - ♦ Symmetric
 - ♦ Negative-Symmetric
 - ♦ Half Band

The vector of coefficients specified must match the structure specified unless Inferred from coefficients is selected in which case the structure is determined automatically from these coefficients.

Ports tab

Parameters specific to the Ports tab are as follows:

- **Provide valid ports:** Provides `vin` and `vout` ports on the block.
- **Provide rst and rfd ports(Ports):** Provides `rst` and `rfd` ports on the block.

Advanced tab

Parameters specific to the Advanced tab are as follows:

- **Rounding mode:** Choose one of the following:
 - ♦ **Full_Precision:**
 - ♦ **Truncated_LSBs:**
 - ♦ **Non_Symmetric_Rounding_Down:**
 - ♦ **Non_Symmetric_Rounding_Up:**
 - ♦ **Convergent_Rounding_To_Even:**
 - ♦ **Convergent_Rounding_To_Odd:**
 - ♦ **Symmetric_Rounding_To_Zero:**
 - ♦ **Symmetric_Rounding_To_One:**
 - ♦ **Symmetric_Rounding_To_Infinity:**
- **Output Width:** Specify the output width. Edit box activated only if the Rounding mode is set to a value other than Full_Precision.
- **Allow Rounding Approximation:** Check to specify that approximations can be used to save resources when using Symmetric_Rounding.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Storage options:** Allows custom memory options to be selected for the storage of both coefficients and data.
 - ♦ **Data buffer:** Specifies the type of memory used to store data samples.
 - ♦ **Coefficient buffer:** Specifies the type of memory used to store the coefficients.
- **Multiple DSP48 column support:** Specifies the method for implementing filters over multiple columns of DSP48 slices in a Virtex™-4 device. Custom mode allows you to specify an exact multi-column implementation and setting this control to disabled turns off all support for multi-column implementations.
 - ♦ **Cross column pipelining:** Specifies the length of the pipelines between columns in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ♦ **First column length:** Specifies the length of the first column in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ♦ **Column wrap length:** Specifies the length of subsequent columns in a multi-column DSP48 filter implementation. This value must be greater than or equal to the first column length specified. This control is only active when Multiple DSP48 column support is set to custom.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ FIR Compiler:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FIR Compiler v3_1	FIR Compiler	V3.1	•	•	•	•	•	•	•	•


Known Issues

The following known issues are associated with certain features of Fir Compiler in SysGen:

- Currently the FIR Compiler block only supports Mac Fir for Virtex™-4, Virtex-5, and Spartan™-3A DSP devices
- There is no automatic multi-column support
- Simulation speed may vary depending on the configuration


FIR Compiler v3_2

This block is listed in the following Xilinx Blockset libraries: *DSP and Index*



The Xilinx Fir Compiler v3_2 block implements a high speed MAC-based FIR filter. It accepts a stream of input data and computes filtered output with a fixed delay, based on the filter configuration.

When the filter is implemented in a device that has DSP48/DSP48E/DSP48A slices, the slices are cascaded as shown in the figure below.

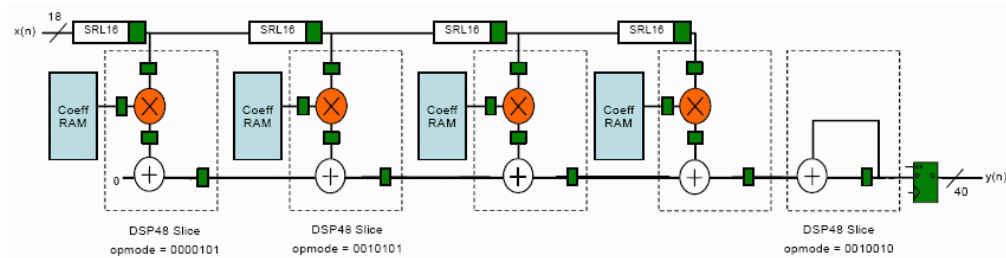


In rest of this topic, DSP48/DSP48E/DSP48A will be referred to as DSP48.


Block Interface

The FIR Compiler v3_2 block can be configured to have a number of optional ports in addition to **din** and **dout** ports which appear in all filter configurations. The first data is consumed by the FIR compiler when the core is ready. This can be inferred by monitoring the **core_rdy** signal which is described in this section.

- **din**: data in port on the FIR Compiler. As shown below, the data for all channels is provided to the FIR Compiler in a time-multiplexed manner through this port.

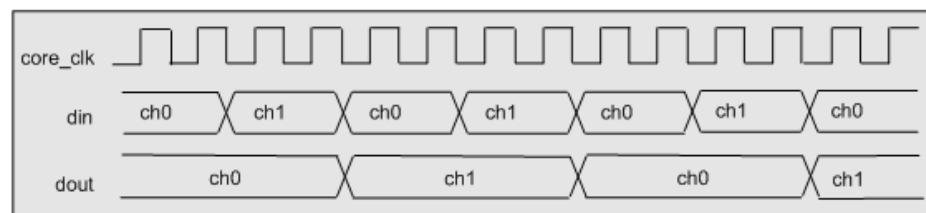


- **vin**: valid in port. Marks each input on the **din** port as valid (high) or invalid (low).

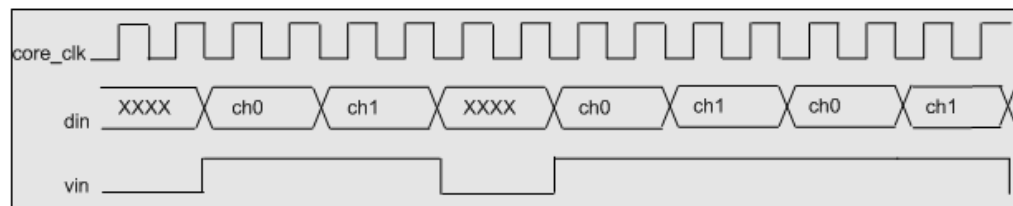

- **en**: synchronous enable port
- **rst**: synchronous reset port
- **dout**: data out port on the FIR compiler. Filtered output data for all the channels is provided through this port in a time-multiplexed fashion.
- **vout**: indicates if the current output data on the **dout** port is valid(high) or invalid(low).
- **chan_out**: indicates which channel the current output data on the **dout** port belongs to.
- **chan_in**: indicates which channel's input data sample should be driven onto the **din** port next. As soon as the current input sample on **din** is clocked into the core, the value on this output port will change indicating the next channel for which a data input is required.
- **coef_ld**: coefficient load port. The signal driving **coef_ld** must be boolean. For more information on the **coef_ld** port, refer to the section below on re-loadable coefficients.
- **coef_we**: coefficient write enable port. The signal driving **coef_we** must be boolean. For more information on the **coef_we** port, refer to the section below on re-loadable coefficients.
- **coef_din**: coefficient data input port. The signal driving **coef_din** must have a type identical to the one specified for coefficients in the block mask. For more information on the **coef_din** port, refer to the section below on re-loadable coefficients.

Reloading Coefficients

The FIR Compiler allows for reloading new coefficient sets dynamically. Three ports **coef_ld**, **coef_we**, and **coef_din**, are used to accomplish this. The timing relationship between the signals on various ports is shown below:

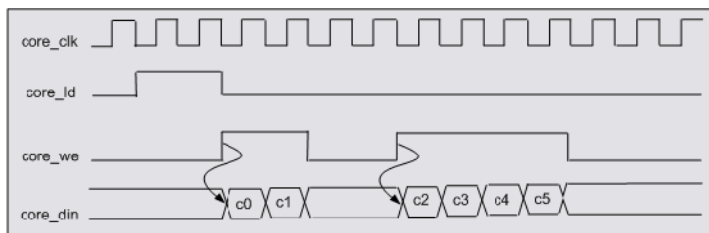

The **core_we** signal can go high at any time after the falling edge of **coef_ld** signal. This initiates the loading of the coefficients. Also observe that all coefficients need not be loaded continuously. When the last coefficient is loaded, after a delay of two **core_clk** cycles (a delay of one in the case of halfband filter coefficients), the new set of coefficients becomes active.

The order that the FIR filter is loaded is determined by the configuration of the FIR Compiler. A utility function called `x1GetReloadOrder` is also provided to determine this order.

xlGetReloadOrder

xlGetReloadOrder is a MATLAB utility function that returns the mapping between the time order of the reloaded coefficient and their tap position in the FIR filter. The function xlGetReloadOrder accepts the following arguments:

- **n_taps**: number of filter taps in the FIR Compiler
- **coef_struct**: Specifies the coefficient structure. It can take one of the following String values
 - ◆ 'Symmetric'
 - ◆ 'Negative-Symmetric'
 - ◆ 'Halfband'
 - ◆ 'Non-Symmetric'
- **filter_type**: Specifies the type of filter being used. It can take one of the following numeric values
 - ◆ 'SingleRate'
 - ◆ 'Decimation'
 - ◆ 'Interpolation'
- **rate_change**: Interpolation or decimation rate change (1-16)
- **overclock**: overclocking factor (1 – n_taps)
- **multiple_column_support**: Disable or custom specify multiple column support
 - ◆ 'Disabled'
 - ◆ 'Custom'
- **first_column_length**: Integer specifying the first column length when multiple column support is enabled
- **column_wrap_length**: Integer specifying the column wrap length when multiple column support is specified

For example, the coefficient reload order of an FIR Compiler block configured as a 16-tap symmetric coefficients decimate by 2 filter, which is overclocked by 2 can be obtained as shown below:

```
>> xlGetReloadOrder( 16, 'Symmetric', 'Decimation', 2, 2, 'Disabled',
4, 32)
ans =
     5
     7
     4
     6
     1
     3
     0
     2
```

The utility returns a vector that captures the reload order. The first element of the vector here is 5. This implies that the first coefficient passed to the Fir Compiler forms the 5th tap of the FIR filter (and hence also the 10th because the filter has symmetric coefficient structure). Similarly the second element value is 7 which denotes that the 2nd coefficient passed to the FIR Compiler forms the 7th(and also 8th) tap of the FIR filter.

Symmetric Interpolation

Symmetric interpolation cases have a reload scheme that is different from all the others in that the coefficients are loaded in a combined manner. Under this configuration the `xlGetReloadOrder` returns a string describing the combination:

```
>> xlGetReloadOrder(16, 'Symmetric', 'Interpolation', 2, 2, 'Disabled',
4, 32)
ans =
{4 - 5} {6 - 7} {4 + 5} {6 + 7} {0 - 1} {2 - 3} {0 + 1} {2 + 3}
```

The above string implies that the first sample clocked into the `coef_din` port is interpreted as the difference between coefficient 4 and coefficient 5. The second sample is interpreted as the difference between coefficient 6 and coefficient 7.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

MODE

- **Filter type:** Allows you to specify the filter as one of the following:
 - ♦ **SingleRate:** The data rate of the input and the output are the same.
 - ♦ **Decimation:** The data rate of the output is slower than the input by a factor specified in the **Sample rate change** parameter
 - ♦ **Interpolation:** The data rate of the output is faster than the input by a factor specified in Sample rate change parameter
 - ♦ **Interpolated:** An interpolated FIR filter has a similar architecture to a conventional FIR filter, but with the unit delay operator replaced by $k-1$ units of delay. k is referred to as the zero-packing factor. The interpolated FIR should not be confused with an interpolation filter. Interpolated filters are single-rate systems employed to produce efficient realizations of narrow-band filters and, with some minor enhancements, wide-band filters can be accommodated. The data rate of the input and the output are the same

- **Sample rate change:** Allows you to specify the factor by which the sample rate of the output changes compared to the input. This parameter is only active when the **Filter type** is set to either Decimation or Interpolation. When Decimation is selected, the sample rate of the output decreases with respect to the input by a factor equal to Sample rate change. When Interpolation is selected, the sample rate of the output increases with respect to the input by a factor equal to the Sample rate change.
- **Zero packing factor:** Allows you to specify the number of 0's inserted between the coefficient specified by the coefficient vector. A zero packing factor of k inserts k-1 0s between the supplied coefficient values. This parameter is only active when the Filter type is set to Interpolated.
- **Number of channels:** The number of data channels to be processed by the FIR Compiler block. The multiple channel data is passed to the core in a time multiplexed manner. A maximum of 64 channels is supported.
- **Hardware over-sampling rate:** Specifies the ratio between the faster of input data rate and the output data rate versus the internal core rate. The overclocking rate determines the number of filter taps folded onto each DSP48 in the filter.

Coefficients

- **Coefficient vector:** Specifies the coefficient vector as a single MATLAB row vector. The number of taps is inferred from the length of the MATLAB row vector. The number of coefficients in a filter configuration, the specified coefficient structure and the hardware over-sampling factor determine the number of DSP48s instantiated by the filter. It is possible to enter these coefficients using the [FDATool](#) block as well.
- **Coefficients Structure:** Specifies the coefficient structure. Depending on the coefficient structure optimizations are made in the core to reduce the amount of hardware required to implement a particular filter configuration. The selected structure can be any of the following:
 - ◆ Inferred from coefficients
 - ◆ Non-Symmetric
 - ◆ Symmetric
 - ◆ Negative-Symmetric
 - ◆ Half Band

The vector of coefficients specified must match the structure specified unless Inferred from coefficients is selected in which case the structure is determined automatically from these coefficients.

Ports tab

Parameters specific to the Ports tab are as follows:

- **Provide valid ports:** Provides `vin` and `vout` ports on the block.
- **Provide en port :** Provides `en` port on the block.
- **Provide rst port :** Provides `rst` port on the block.

Advanced tab

Parameters specific to the Advanced tab are as follows:

- **Rounding mode:** Choose one of the following:
 - ♦ **Full_Precision:**
 - ♦ **Truncated_LSBs:**
 - ♦ **Non_Symmetric_Rounding_Down:**
 - ♦ **Non_Symmetric_Rounding_Up:**
 - ♦ **Convergent_Rounding_To_Even:**
 - ♦ **Convergent_Rounding_To_Odd:**
 - ♦ **Symmetric_Rounding_To_Zero:**
 - ♦ **Symmetric_Rounding_To_One:**
 - ♦ **Symmetric_Rounding_To_Infinity:**
- **Output Width:** Specify the output width. Edit box activated only if the Rounding mode is set to a value other than Full_Precision.
- **Allow Rounding Approximation:** Check to specify that approximations can be used to save resources when using Symmetric_Rounding.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Storage options:** Allows custom memory options to be selected for the storage of both coefficients and data.
 - ♦ **Data buffer:** Specifies the type of memory used to store data samples.
 - ♦ **Coefficient buffer:** Specifies the type of memory used to store the coefficients.
- **Multiple DSP48 column support:** Specifies the method for implementing filters over multiple columns of DSP48 slices in a Virtex™-4 device. Custom mode allows you to specify an exact multi-column implementation and setting this control to disabled turns off all support for multi-column implementations.
 - ♦ **Cross column pipelining:** Specifies the length of the pipelines between columns in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ♦ **First column length:** Specifies the length of the first column in a multi-column DSP48 filter implementation. This control is only active when Multiple DSP48 column support is set to custom.
 - ♦ **Column wrap length:** Specifies the length of subsequent columns in a multi-column DSP48 filter implementation. This value must be greater than or equal to the first column length specified. This control is only active when Multiple DSP48 column support is set to custom.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ FIR Compiler:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FIR Compiler v3_2	FIR Compiler	V3.2	•	•	•	•	•	•	•	•

Known Issues

The following known issues are associated with certain features of Fir Compiler in Sysgen:

- Currently the FIR Compiler block only supports Mac Fir for Virtex™-4, Virtex-5, and Spartan™-3A DSP devices
- There is no automatic multi-column support

Simulation speed may vary depending on the configuration

From FIFO

This block is listed in the following Xilinx Blockset libraries: *Shared Memory and Index*.



The Xilinx From FIFO block implements the trailing half of a first-in-first-out memory queue.

By asserting the read-enable input port *re*, data can be read from the FIFO via the data output port *dout*. The empty output port is asserted when the FIFO is empty. The percent full output port indicates the percentage of the FIFO that is full, represented with user-specified precision.

The From FIFO is implemented in hardware using the FIFO Generator v2.1 core. System Generator's hardware co-simulation interfaces allow the From FIFO block to be compiled and co-simulated in FPGA hardware. When used in System Generator co-simulation hardware, shared FIFOs facilitate high-speed transfers between the host PC and FPGA, and bolster the tool's real-time hardware co-simulation capabilities.

Starting with the 9.2 release, during netlisting, each pair of **From FIFO** and **To FIFO** blocks with the same name are stitched together as a BRAM-based **FIFO** block in the netlist. If a **From FIFO** or **To FIFO** block does not form a pair with another block, it's input and output ports are pushed to the top level of System Generator design. A pair of matching blocks can exist anywhere in the hierarchy of the design, however, if two or more **From FIFO** or **To FIFO** blocks with the same name exist in the design, then an error is issued.

For backward compatibility, you can set the MATLAB global variable `xlSgSharedMemoryStitch` to "off" to bring System Generator back to the netlisting behavior before the 9.2 release. For example, from the MATLAB command line, enter the following:

```
global xlSgSharedMemoryStitch;
xlSgSharedMemoryStitch = 'off';
```

Block Parameters

Basic tab

Parameters specific to the Basic tab are as follows:

- **Shared memory name:** name of the shared FIFO. All FIFOs with the same name share the same physical FIFO.
- **Ownership:** indicates whether the memory is Locally owned or Owned elsewhere. A block that is Locally owned is responsible for creating an instance of the FIFO. A block that is Owned elsewhere attaches itself to a FIFO instance that has already been created.
- **Depth:** specifies the number of words in the memory. The word size is inferred from the bit width of the port *din*.
- **Bits of precision to use for %full port:** specifies the bit width of the %full port. The binary point for this unsigned output is always at the top of the word. Thus, for example, if precision is set to one, the output can take two values: 0.0 and 0.5, the latter indicating the FIFO is at least 50% full.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block is implemented with the Xilinx LogiCORE™ FIFO Generator:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
From FIFO	FIFO Generator	V4.2	•	•	•	•	•	•	•	•

See Also

The following topics provide valuable insight into using and understanding the From FIFO block:

[To FIFO](#)

[Multiple Subsystem Generator](#)

[Co-Simulating Shared FIFOs](#)

From Register

This block is listed in the following Xilinx Blockset libraries: Index.



The Xilinx From Register block implements the trailing half of a D flip-flop based register. The physical register can be shared among two designs or two portions of the same design.

The block reads data from a register that is written to by the corresponding To Register block. The `dout` port presents the output of the register. The bit width specified on the mask must match the width of the corresponding To Register block.

Starting with the 9.2 release, during netlisting, each pair of **From Register** and **To Register** blocks with the same name are stitched together as a single **Register** block in the netlist. If a **From Register** or **To Register** block does not form a pair with another block, its input and output ports are pushed to the top level of System Generator design. A pair of matching blocks can exist anywhere in the hierarchy of the design, however, if two or more **From Register** or **To Register** blocks with the same name exist in the design, then an error is issued.

For backward compatibility, you can set the MATLAB global variable `xlSgSharedMemoryStitch` to "off" to bring System Generator back to the netlisting behavior before the 9.2 release. For example, from the MATLAB command line, enter the following:

```
global xlSgSharedMemoryStitch;
xlSgSharedMemoryStitch = 'off';
```

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the Basic tab are as follows:


- **Shared Memory Name:** name of the shared register. There must be exactly one To Register and exactly one From Register block for a particular register name. In addition, the name must be distinct from all other shared memory names in the design.
- **Initial value:** specifies the initial value in the register.
- **Ownership and initialization:** indicates whether the register is Locally owned and initialized or Owned and initialized elsewhere. A block that is locally owned is responsible for creating an instance of the register. A block that is owned elsewhere attaches itself to a register instance that has already been created. As a result, if two shared register blocks are used in two different models during simulation, the model containing the locally owned block has to be started first.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Crossing Clock Domain

When a To Register and From Register block pair are used to cross clock domain boundaries, a single register is implemented in hardware. This register is clocked by the To Register block clock domain. For example, assume a design has two clock domains,

Domain_A and Domain_B. Also assume that a shared register pair are used to cross the two clock domains shown below.

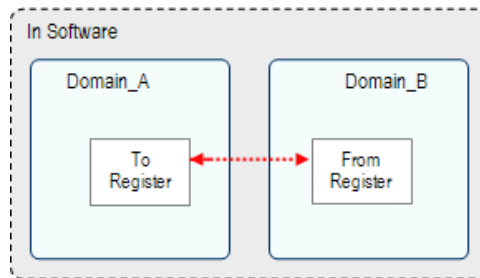

When the design is generated using the Multiple Subsystem Generator block, only one register is included in the design. The clock and clock enable register signals are driven from the Domain_A domain.

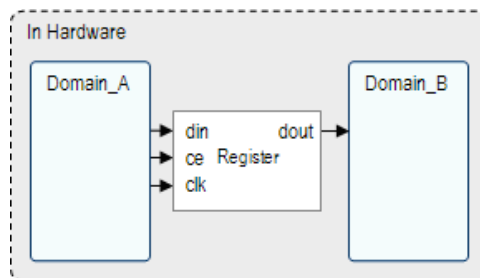

Crossing domains in this manner may be unsafe. To reduce the chance of metastability, include two Register blocks immediately following the From Register block to re-synchronize the data to the From Register's clock domain.

See Also

The following topics provide valuable insight into using and understanding the From Register block:

[To Register](#)

[Multiple Subsystem Generator](#)

[Co-Simulating Shared Registers](#)

Gateway In

This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Data Types, and Index.*



The Xilinx Gateway In blocks are the inputs into the Xilinx portion of your Simulink design. These blocks convert Simulink integer, double and fixed-point data types into the System Generator fixed-point type. Each block defines a top-level input port in the HDL design generated by System Generator.

While converting a double type to a System Generator fixed-point type, the Gateway In uses the selected overflow and quantization options. For overflow, the options are to saturate to the largest positive/smallest negative value, to wrap (i.e., to discard bits to the left of the most significant representable bit), or to flag an overflow as a Simulink error during simulation. For quantization, the options are to round to the nearest representable value (or to the value furthest from zero if there are two equidistant nearest representable values), or to truncate (i.e., to discard bits to the right of the least significant representable bit).

It is important to realize that overflow and quantization do not take place in hardware – they take place in the block software itself, before entering the hardware phase.

Gateway Blocks

As listed below, the Xilinx *Gateway In* block is used to provide a number of functions:

- Converting data from Simulink integer, double and fixed-point types to the System Generator fixed-point type during simulation in Simulink.
- Defining top-level input ports in the HDL design generated by System Generator.
- Defining testbench stimuli when the **Create Testbench** box is checked in the System Generator block. In this case, during HDL code generation, the inputs to the block that occur during Simulink simulation are logged as a logic vector in a data file. During HDL simulation, an entity that is inserted in the top level testbench checks this vector and the corresponding vectors produced by Gateway Out blocks against expected results.
- Naming the corresponding port in the top level HDL entity.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the Basic tab are as follows:

- **IOB Timing Constraint:** In hardware, a Gateway In is realized as a set of input/output buffers (IOBs). There are two ways to constrain the timing on IOBs. They are None and Data Rate.

If None is selected, no timing constraints for the IOBs are put in the constraint file (.xcf if using the XST synthesis tool, .ncf otherwise) produced by System Generator. This means the paths from the IOBs to synchronous elements are not constrained.

If Data Rate is selected, the IOBs are constrained at the data rate at which the IOBs operate. The rate is determined by the System Clock Period field in the System Generator block and the sample rate of the Gateway relative to the other sample periods in the design. For example, the following OFFSET = IN constraints are generated for a Gateway In named 'Din' that is running at the system period of 10 ns:


```
# Offset in constraints
NET "Din(0)" OFFSET = IN : 10.0 : BEFORE "clk";
NET "Din(1)" OFFSET = IN : 10.0 : BEFORE "clk";
NET "Din(2)" OFFSET = IN : 10.0 : BEFORE "clk";
```

- **Specify IOB Location Constraints:** When this box is checked, a new edit box appears that allows you to specify IOB location constraints, discussed below.
- **IOB Pad Locations, e.g. {'MSB', ..., 'LSB'}:** IOB pin locations can be specified as a cell array of strings in this edit box. The locations are package-specific. For the above example, if a Virtex™-E 2000 in a FG680 package is used, the location constraints for the Din bus can be specified in the dialog box as {'C36', 'B36', 'D35'}. This is translated into constraints in the .xcf (or .ncf) file in the following way:

```
# Loc constraints
NET "Din(0)" LOC = "D35";
NET "Din(1)" LOC = "B36";
NET "Din(2)" LOC = "C35";
```

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#). However, the Gateway In block, as opposed to other blocks, will not use extra hardware resources when selecting Round for the Quantization field or Saturate for the Overflow field

Gateway Out

This block is listed in the following Xilinx Blockset libraries: *Basic Elements*, *Data Types*, and *Index*.



Xilinx Gateway Out blocks are the outputs from the Xilinx portion of your Simulink design. This block converts the System Generator fixed-point data type into Simulink Double.

According to its configuration, the Gateway Out block can either define an output port for the top level of the HDL design generated by System Generator, or be used simply as a test point that will be trimmed from the hardware representation

Gateway Blocks

As listed below, the Xilinx *Gateway Out* block is used to provide a number of functions:

- Converting data from Sysgen Generator fixed-point type to Simulink double.
- Defining I/O ports for the top level of the HDL design generated by System Generator. A Gateway Out block defines a top level output port.
- Defining testbench result vectors when the System Generator Create Testbench box is checked. In this case, during HDL code generation, the outputs from the block that occur during Simulink simulation are logged as logic vectors in a data file. For each top level port, an HDL component is inserted in the top level testbench that checks this vector against expected results during HDL simulation.
- Naming the corresponding output port on the top level HDL entity.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the Basic tab are as follows:

- **Translate into Output Port:** Having this box unchecked prevents the gateway from becoming an actual output port when translated into hardware. This checkbox is on by default, enabling the output port. When this option is not selected, the Gateway Out block is used only during debugging, where its purpose is to communicate with Simulink Sink blocks for probing portions of the design. In this case, the Gateway Out block will turn gray in color, indicating that the gateway will not be translated into an output port.
- **IOB Timing Constraint:** In hardware, a Gateway Out is realized as a set of input/output buffers (IOBs). There are three ways to constrain the timing on IOBs. They are None, Data Rate, and Data Rate, Set 'FAST' Attribute.

If **None** is selected, no timing constraints for the IOBs are put in the user constraint file (.xctf if using the XST synthesis tool, .ncf otherwise) produced by System Generator. This means the paths from the IOBs to synchronous elements are not constrained.

If **Data Rate** is selected, the IOBs are constrained at the data rate at which the IOBs operate. The rate is determined by System Clock Period provided on the System Generator block and the sample rate of the Gateway relative to the other sample periods in the design. For example, the following OFFSET = OUT constraints are generated for a Gateway Out named 'Dout' that is running at the system period of 10 ns:

```
# Offset out constraints
```

```
NET "Dout(0)" OFFSET = OUT : 10.0 : AFTER "clk";
NET "Dout(1)" OFFSET = OUT : 10.0 : AFTER "clk";
NET "Dout(2)" OFFSET = OUT : 10.0 : AFTER "clk";
```

If **Data Rate, Set 'FAST' Attribute** is selected, the OFFSET = OUT constraints described above are produced. In addition, a FAST slew rate attribute is generated for each IOB. This reduces delay but increases noise and power consumption. For the previous example, the following additional attributes are added to the .xcf (or .ncf) file

```
NET "Dout(0)" FAST;
NET "Dout(1)" FAST;
NET "Dout(2)" FAST;
```

- **Specify IOB Location Constraints:** Checking this option allows IOB location constraints to be specified.
- **IOB Pad Locations, e.g. {'MSB', ..., 'LSB'}:** IOB pin locations can be specified as a cell array of strings in this edit box. The locations are package-specific. For the above example, if a Virtex™-E 2000 in a FG680 package is used, the location constraints for the Dout bus can be specified in the dialog box as {'B34', 'D33', 'B35'}. This is translated into constraints in the .xcf (or .ncf) file in the following way:

```
# Loc constraints
NET "Dout(0)" LOC = "B35";
NET "Dout(1)" LOC = "D33";
NET "Dout(2)" LOC = "B34";
```

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Indeterminate Probe

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The output of the Xilinx Indeterminate Probe indicates whether the input data is indeterminate (MATLAB value NaN). An indeterminate data value corresponds to a VHDL indeterminate logic data value of 'X'.

The probe accepts any Xilinx signal as input and produces a double signal as output. Indeterminate data on the probe input will result in an assertion of the output signal indicated by a value one. Otherwise, the probe output is zero.


Interleaver Deinterleaver v4_0

This block is listed in the following Xilinx Blockset libraries: Communication and Index.




The Xilinx Interleaver/Deinterleaver block implements an interleaver or a deinterleaver. An interleaver is a device that rearranges the ordering of a sequence of symbols in a one-to-one deterministic manner. Associated with any interleaver is a deinterleaver, a device that restores the reordered sequence.

When the block is in interleaver mode, the input data sampled on the din port shall be multiplexed into and out of B shift registers onto the dout port using two (synchronized) commutator arms, as illustrated in the figure below. B is the number of branches as entered in the block's parameters dialog. Branch 0 shall have a shift register of zero length. Branch 1 shall have a shift register of length L. Branch 2 shall have a shift register of length 2L. Branch (B-1) shall have a shift register of length (B-1)L. L is the branch length constant entered as an array with a length of one.

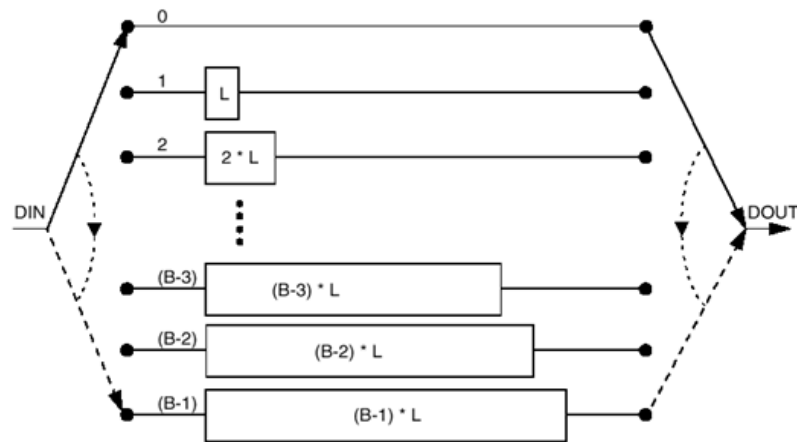

When the block is in deinterleaver mode, the input data sampled on the din port is multiplexed into and out of B shift registers onto the dout port using two (synchronized) commutator arms. Branch 0 will have a shift register of length (B-1)*L. Branch (B-1) shall have a shift register length of zero.

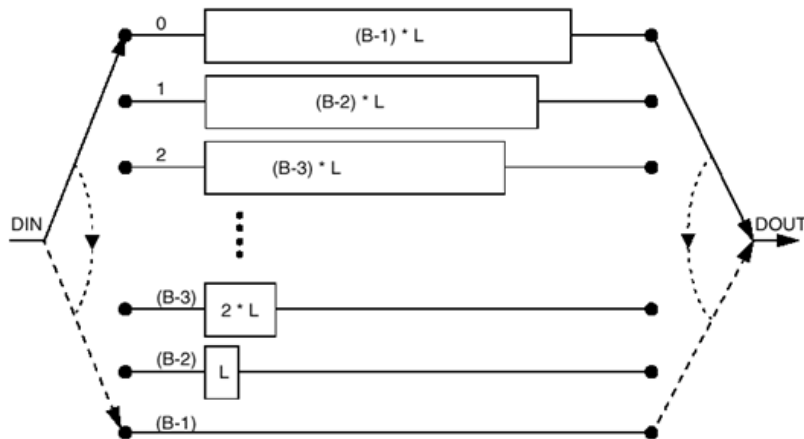

When the branch lengths are specified as an array, the block operates the same in either interleaver or deinterleaver mode because the array fully defines the length of all the branches. The array must have length B, matching the number of branches.

The reset pin (`rst`) will set the commutator arms to branch 0, but will not clear the branches of data.

Block Interface

The Interleaver/Deinterleaver block has two to four input and two output ports. The input port, `din`, must be between 1 and 256 (inclusive) bits. The `vin` port indicates that the values presented on the `din` port are valid. Only valid data is multiplexed into and out of the shift registers. The `vout` port indicates that the values presented on the `dout` port are valid. The size of the output port, `dout`, is the same as the input port, `din`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic Tab

Parameters specific to the Basic tab are as follows:

- **Mode:** Interleaver or Deinterleaver
- **Number of branches:** 1 to 256 (inclusive)
- **Lengths of branches:** 1 to MAX (inclusive). MAX depends on the number of branches and size of core input. Branch length must be an array of either length one or number of branches. If the array size is one, the value is used as a constant difference between consecutive branches. Otherwise, each branch has a unique length.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Memory type:** Automatically chosen, block RAM or distributed RAM.
- **Pipeline for maximum performance:** pipeline the core.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Interleaver/De-interleaver:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
Interleaver Deinterleaver v4_0	Interleaver/De-Interleaver	V4.0	•	•			•	•	•	


Interleaver Deinterleaver v5_0

This block is listed in the following Xilinx Blockset libraries: Communication and Index.




The Xilinx Interleaver/Deinterleaver block implements an interleaver or a deinterleaver. An interleaver is a device that rearranges the ordering of a sequence of symbols in a one-to-one deterministic manner. Associated with any interleaver is a deinterleaver, a device that restores the reordered sequence.

When the block is in interleaver mode, the input data sampled on the `din` port is multiplexed into and out of B shift registers onto the `dout` port using two (synchronized) commutator arms, as illustrated in the figure below. B is the number of branches as entered in the block's parameters dialog. Branch 0 has a shift register of zero length. Branch 1 has a shift register of length L . Branch 2 has a shift register of length $2L$. Branch $(B-1)$ has a shift register of length $(B-1)L$. L is the branch length constant entered as an array with a length of one.

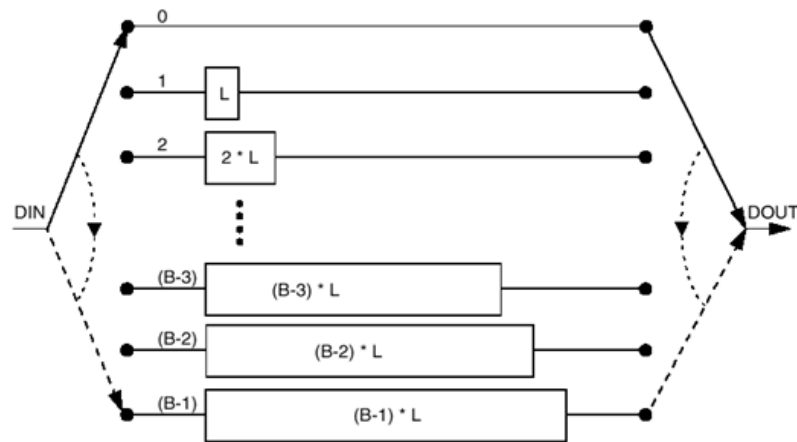

When the block is in deinterleaver mode, the input data sampled on the `din` port is multiplexed into and out of B shift registers onto the `dout` port using two (synchronized) commutator arms. Branch 0 has a shift register of length $(B-1)L$. Branch $(B-1)$ has a shift register length of zero.

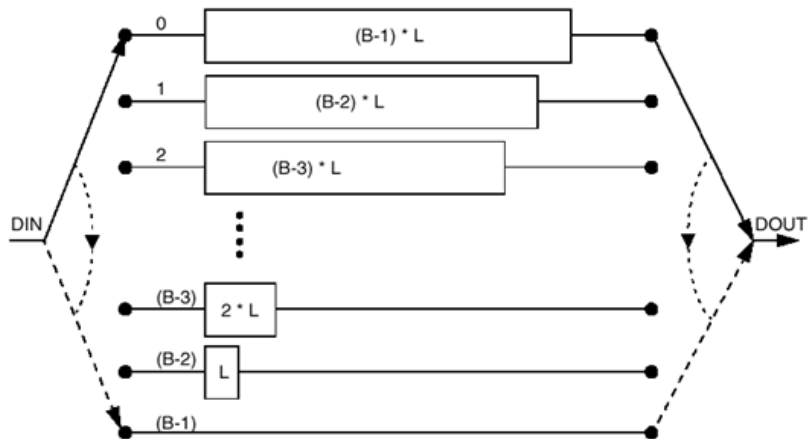

When the branch lengths are specified as an array, the block operates the same in either interleaver or deinterleaver mode because the array fully defines the length of all the branches. The array must have length B, matching the number of branches.

The reset pin (`rst`) sets the commutator arms to branch 0, but does not clear the branches of data.

Block Interface

The Interleaver/Deinterleaver block has two to four input and two output ports. The input port, `din`, must be between 1 and 256 (inclusive) bits. The `vin` port indicates that the values presented on the `din` port are valid. Only valid data is multiplexed into and out of the shift registers. The `vout` port indicates that the values presented on the `dout` port are valid. The size of the output port, `dout`, is the same as the input port, `din`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic Tab

Parameters specific to the Basic tab are as follows:

- **Mode:** Interleaver or Deinterleaver
- **Number of branches:** 1 to 256 (inclusive)
- **Lengths of branches:** 1 to MAX (inclusive). MAX depends on the number of branches and size of core input. Branch length must be an array of either length one or number of branches. If the array size is one, the value is used as a constant difference between consecutive branches. Otherwise, each branch has a unique length.

Implementation tab

Parameters specific to the Implementation tab are as follows:

- **Memory type:** Automatically chosen, block RAM or distributed RAM.
- **Pipeline for maximum performance:** pipeline the core.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block uses the following Xilinx LogiCORE™ Interleaver/De-interleaver:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
Interleaver Deinterleaver v5_0	Interleaver/De-Interleaver	V5.0	•	•			•	•	•	

Inverter

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Math, and Index.



The Xilinx Inverter block calculates the bitwise logical complement of a fixed-point number. The block is implemented as a synthesizable VHDL module.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

JTAG Co-Simulation



JTAG
Co-simulation

The Xilinx JTAG Co-Simulation block allows you to perform hardware co-simulation using JTAG and a Parallel Cable IV or Platform USB. The JTAG hardware co-simulation interface takes advantage of the ubiquity of JTAG to extend System Generator's hardware in the simulation loop capability to numerous other FPGA platforms.

The port interface of the co-simulation block varies. When a model is implemented for JTAG hardware co-simulation, a new library is created that contains a custom JTAG co-simulation block with ports that match the gateway names (or port names if the subsystem is not the top level) from the original model. The co-simulation block interacts with the FPGA hardware platform during a Simulink simulation. Simulation data that is written to the input ports of the block are passed to the hardware by the block. Conversely, when data is read from the co-simulation block's output ports, the block reads the appropriate values from the hardware and drives them on the output ports so they can be interpreted in Simulink. In addition, the block automatically opens, configures, steps, and closes the platform.

Refer to [JTAG Hardware Co-Simulation](#) for JTAG hardware requirements, and information on how to support new platforms.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Clock source:** You may select between Single stepped and Free running clock sources. Selecting a Single stepped clock allows the block to step the board one clock cycle at a time. Each clock cycle step corresponds to some duration of time in Simulink. Using this clock source ensures the behavior of the co-simulation hardware during simulation will be bit and cycle accurate when compared to the simulation behavior of the subsystem from which it originated. Sometimes single stepping is not necessary and the board can be run with a Free Running clock. In this case, the board will operate asynchronously to the Simulink simulation.
- **Has combinational path:** Sometimes it is necessary to have a direct combinational feedback path from an output port on a hardware co-simulation block to an input port on the same block (e.g., a wire connecting an output port to an input port on a given block). If you require a direct feedback path from an output to input port, and your design does not include a combinational path from any input port to any output port, un-checking this box will allow the feedback path in the design.
- **Bitstream name:** Specifies the co-simulation FPGA configuration file for the JTAG hardware co-simulation platform. When a new co-simulation block is created during compilation, this parameter is automatically set so that it points to the appropriate configuration file. You need only adjust this parameter if the location of the configuration file changes.

Advanced tab

- **Skip device configuration:** Selecting this option causes the co-simulation block to skip the device configuration phase at the beginning of a simulation. Doing so is useful for co-simulation designs that do not need to be reset (or reprogrammed) at the end of a simulation. This checkbox should be used with caution since the co-simulation platform is not programmed when this checkbox is selected. This means that it is possible to perform hardware co-simulation without a co-simulation bitstream loaded on the hardware platform.


Cable tab

- **Download cable:** You may select between Parallel Cable IV and Platform USB programming cables for performing JTAG hardware co-simulation.
- **Cable speed:** Sometimes you may need to run the programming cable at a frequency less than the default (maximum) speed setting for hardware co-simulation. This menu allows you to choose a cable speed that is suitable for your hardware setup. Normally the default speed will suffice, however, it is recommended to try a slower cable speed if System Generator fails to configure the device for co-simulation.
- **Shared cable for concurrent access:** This option allows the JTAG cable to be shared with EDK XMD and ChipScope™ Pro Analyzer during a JTAG co-simulation. When the option is checked, the JTAG co-simulation engine only acquires a lock on the cable access and then immediately releases the lock when the access completes. Otherwise, the JTAG co-simulation engine holds the lock throughout the simulation. Due to the significant overhead on locking and unlocking the cable, this cable sharing option is disabled by default and only enabled when you check the box.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

LFSR

This block is listed in the following Xilinx Blockset libraries: Basic Elements, DSP, Memory, and Index.



ports

The Xilinx LFSR block implements a Linear Feedback Shift Register (LFSR). This block supports both the Galois and Fibonacci structures using either the XOR or XNOR gate and allows a re-loadable input to change the current value of the register at any time. The LFSR output and re-loadable input can be configured as either serial or parallel

Block Interface

Port Name	Port Description	Port Type
din	Data input for re-loadable seed	Optional serial or parallel input
load	Load signal for din	Optional boolean input
rst	Reset signal	Optional boolean input
en	Enable signal	Optional boolean input
dout	Data output of LFSR	Required serial or parallel output

As shown in the table above, there can be between 0 and 4 block input ports and exactly one output port. If the configuration selected requires 0 inputs, the LFSR will be set up to start at a specified initial seed value and will step through a repeatable sequence of states determined by the LFSR structure type, gate type and initial seed.

The optional `din` and `load` ports provide the ability to change the current value of the LFSR at runtime. After the load completes, the LFSR will behave as with the 0 input case and start up a new sequence based upon the newly loaded seed and the statically configured LFSR options for structure and gate type.

The optional `rst` port will reload the statically specified initial seed of the LFSR and continue on as before after the `rst` signal goes low. And when the optional `en` port goes low, the LFSR will remain at its current value with no change until the `en` port goes high again.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- Type:** Fibonacci or Galois. This field specifies the structure of the feedback. Fibonacci has one XOR (or XNOR) gate at the beginning of the register chain that XORs (or XNORs) the taps together with the result going into the first register. Galois has one XOR(or XNOR) gate for each tap and gates the last register in the chains output with the input to the register at that tap.

- **Gate type:** XOR or XNOR. This field specifies the gate used by the feedback signals.
- **Number of bits in LFSR:** This field specifies the number of registers in the LFSR chain. As a result, this number specifies the size of the input and output when selected to be parallel.
- **Feedback polynomial:** This field specifies the tap points of the feedback chain and the value must be entered in hex with single quotes. The lsb of this polynomial always must be set to 1 and the msb is an implied 1 and is not specified in the hex input. Please see the LFSR core data sheet link shown below for more information on how to specify this equation and for optimal settings for the maximum repeating sequence.
- **Initial value:** This field specifies the initial seed value where the LFSR begins its repeating sequence. The initial value may not be all zeroes when choosing the XOR gate type and may not be all ones when choosing XNOR, as those values will stall the LFSR.

Advanced tab


Parameters specific to the Advanced tab are as follows:

- **Parallel output:** This field specifies whether all of the bits in the LFSR chain are connected to the output or just the last register in the chain (serial or parallel).
- **Use reloadable seed values:** This field specifies whether or not an input is needed to reload a dynamic LFSR seed value at runtime.
- **Parallel input:** This field specifies whether the reloadable input seed is shifted in one bit at a time or if it happens in parallel.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Logical

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Math, and Index.



The Xilinx Logical block performs bitwise logical operations on 2, 3, or 4 fixed-point numbers. Operands are zero padded and sign extended as necessary to make binary point positions coincide; then the logical operation is performed and the result is delivered at the output port.

In hardware this block is implemented as synthesizable VHDL. If you build a tree of logical gates, this synthesizable implementation is best as it facilitates logic collapsing in synthesis and mapping.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Logical function:** specifies one of the following bitwise logical operators: AND, NAND, OR, NOR, XOR, XNOR.
- **Number of inputs:** specifies the number of inputs (1 - 1024).

Output Type tab

Parameters specific to the Output Type tab are as follows:

- **Align binary point:** specifies that the block must align binary points automatically. If not selected, all inputs must have the same binary point position.


Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block does not use a Xilinx LogiCORE™.

MCode

This block is listed in the following Xilinx Blockset libraries: *Control Logic*, *Math*, and *Index*.



The Xilinx **MCode** block is a container for executing a user-supplied MATLAB function within Simulink. A parameter on the block specifies the M-function name. The block executes the M-code to calculate block outputs during a Simulink simulation. The same code is translated in a straightforward way into equivalent behavioral VHDL/Verilog when hardware is generated.

The block's Simulink interface is derived from the MATLAB function signature, and from block mask parameters. There is one input port for each parameter to the function, and one output port for each value the function returns. Port names and ordering correspond to the names and ordering of parameters and return values.

The **MCode** block supports a limited subset of the MATLAB language that is useful for implementing arithmetic functions, finite state machines and control logic. Users who wish to implement complete MATLAB algorithms on fixed-point FPGA hardware should consider using the Xilinx AccelDSP™ Synthesis Tool. AccelDSP can be used to create custom IP blocks, from high-level, floating-point MATLAB, for use in combination with the Xilinx DSP blockset.

The **MCode** block has the following three primary coding guidelines that must be followed:

- All block inputs and outputs must be of Xilinx fixed-point type.
- The block must have at least one output port.
- The code for the block must exist on the MATLAB path or in the same directory as the directory as the model that uses the block.

The topic [Compiling MATLAB into an FPGA](#) shows three examples of functions for the **MCode** block. The first example (also described below) consists of a function `x1max` which returns the maximum of its inputs. The second illustrates how to do simple arithmetic. The third shows how to build a finite state machine. These examples are linked from the topic titled [Additional Examples and Tutorials](#).

Configuring an MCode Block

The **MATLAB Function** parameter of an **MCode** block specifies the name of the block's M-code function. This function must exist in one of the three locations at the time this parameter is set. The three possible locations are:


- The directory where the model file is located.
- A subdirectory of the model directory named `private`.
- A directory in the MATLAB path.

The block icon displays the name of the M-function. To illustrate these ideas, consider the file `x1max.m` containing function `x1max`:


```
function z = x1max(x, y)
    if x > y
        z = x;
    else
        z = y;
    end
```

An **MCode** block based on the function `xlmax` will have input ports `x` and `y` and output port `z`.

The following figure shows how to set up an **MCode** block to use function `xlmax`.

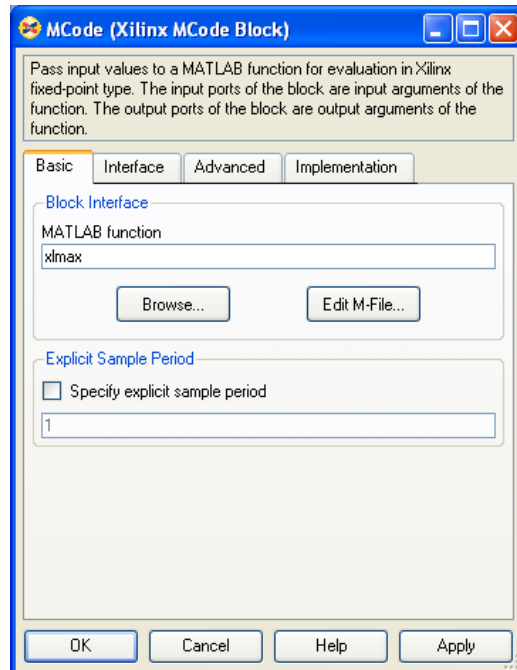

Once the model is compiled, the `xlmax` **MCode** block will appear like the block illustrated below.

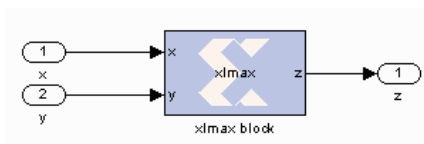

MATLAB Language Support

The **MCode** block supports the following MATLAB language constructs:

- Assignment statements
- Simple and compound `if/else/elseif` end statements
- `switch` statements
- Arithmetic expressions involving only addition and subtraction
- Addition
- Subtraction
- Multiplication
- Division by a power of two

- Relational operators:

<	Less than
<=	Less than or equal to
>	Greater than
>=	Greater than or equal to
==	Equal to
~=	Not equal to
- Logical operators:

&	And
	Or
~	Not

The **MCode** block supports the following MATLAB functions.

- Type conversion. The only supported data type is `xfix`, the Xilinx fixed-point type. The `xfix()` type conversion function is used to convert to this type. The conversion is done implicitly for integers but must be done explicitly for floating point constants. All values must be scalar; arrays are not supported.
- Functions that return `xfix` properties:

<code>xl_nbits()</code>	Returns number of bits
<code>xl_binpt()</code>	Returns binary point position
<code>xl_arith()</code>	Returns arithmetic type
- Bit-wise logical functions:

<code>xl_and()</code>	Bit-wise and
<code>xl_or()</code>	Bit-wise or
<code>xl_xor()</code>	Bit-wise xor
<code>xl_not()</code>	Bit-wise not
- Shift functions: `xl_lsh()` and `xl_rsh()`
- Slice function: `xl_slice()`
- Concatenate function: `xl_concat()`
- Reinterpret function: `xl_force()`
- Internal state variables: `xl_state()`

- MATLAB Functions:

<code>disp()</code>	Displays variable values
<code>error()</code>	Displays message and abort function
<code>isnan()</code>	Tests whether a number is NaN
<code>NaN()</code>	Returns Not-a-Number
<code>num2str()</code>	Converts a number to string
<code>ones(1,N)</code>	Returns 1-by-N vector of ones
<code>pi()</code>	Returns pi
<code>zeros(1,N)</code>	Returns 1-by-N vector of zeros

Data Types

There are three kinds of `xfix` data types: unsigned fixed-point (`xlUnsigned`), signed fixed-point (`xlSigned`), and boolean (`xlBoolean`). Arithmetic operations on these data types produce signed and unsigned fixed-point values. Relational operators produce a boolean result. Relational operands can be any `xfix` type, provided the mixture of types makes sense. Boolean variables can be compared to boolean variables, but not to fixed-point numbers; boolean variables are incompatible with arithmetic operators. Logical operators can only be applied to boolean variables. Every operation is performed in full precision, i.e., with the minimum precision needed to guarantee that no information is lost.

Literal Constants

Integer, floating-point, and boolean literals are supported. Integer literals are automatically converted to `xfix` values of appropriate width having a binary point position at zero. Floating-point literals must be converted to the `xfix` type explicitly with the `xfix()` conversion function. The predefined MATLAB values `true` and `false` are automatically converted to boolean literals.

Assignment

The left-hand side of an assignment can only contain one variable. A variable can be assigned more than once.

Control Flow

The conditional expression of an `if` statement must evaluate to a boolean. Switch statements can contain a `case` clause and an `otherwise` clause. The types of a switch selector and its cases must be compatible; thus, the selector can be boolean provided its cases are. All cases in a `switch` must be constant; equivalently, no `case` can depend on an input value.

When the same variable is assigned in several branches of a control statement, the types being assigned must be compatible. For example,

```
if (u > v)
    x = a;
else
    x = b;
end
```

is acceptable only if `a` and `b` are both boolean or both arithmetic.

Constant Expressions

An expression is constant provided its value does not depend on the value of any input argument. Thus, for example, the variable `c` defined by

```
a = 1;
b = a + 2;
c = xfix({xlSigned, 10, 2}, b + 3.345);
```

can be used in any context that demands a constant.

xfix() Conversion

The `xfix()` conversion function converts a double to an `xfix`, or changes one `xfix` into another having different characteristics. A call on the conversion function looks like the following

```
x = xfix(type_spec, value)
```

Here `x` is the variable that receives the `xfix`. `type_spec` is a cell array that specifies the type of `xfix` to create, and `value` is the value being operated on. The `value` can be floating point or `xfix` type. The `type_spec` cell array is defined using curly braces in the usual MATLAB method. For example,

```
xfix({xlSigned, 20, 16, xlRound, xlWrap}, 3.1415926)
```

returns an `xfix` approximation to `pi`. The approximation is signed, occupies 20 bits (16 fractional), quantizes by rounding, and wraps on overflow.

The `type_spec` consists of 1, 3, or 5 elements. Some elements can be omitted. When elements are omitted, default element settings are used. The elements specify the following properties (in the order presented): data type, width, binary point position, quantization mode, and overflow mode. The data type can be `xlBoolean`, `xlUnsigned`, or `xlSigned`. When the type is `xlBoolean`, additional elements are not needed (and must not be supplied). For other types, width and binary point position must be supplied. The quantization and overflow modes are optional, but when one is specified, the other must be as well. Three values are possible for quantization: `xlTruncate`, `xlRound`, and `xlRoundBanker`. The default is `xlTruncate`. Similarly, three values are possible for overflow: `xlWrap`, `xlSaturate`, and `xlThrowOverflow`. For `xlThrowOverflow`, if an overflow occurs during simulation, an exception occurs.

All values in a `type_spec` must be known at compilation time; equivalently, no `type_spec` value can depend on an input to the function.

The following is a more elaborate example of an `xfix()` conversion:

```
width = 10, binpt = 4;
z = xfix({xlUnsigned, width, binpt}, x + y);
```

This assignment to `x` is the result of converting `x + y` to an unsigned fixed-point number that is 10 bits wide with 4 fractional bits using `xlTruncate` for quantization and `xlWrap` for overflow.

If several `xfix()` calls need the same `type_spec` value, you can assign the `type_spec` to a variable, then use the variable for `xfix()` calls. For example, the following is allowed:

```
proto = {xlSigned, 10, 4};
x = xfix(proto, a);
y = xfix(proto, b);
```

xfix Properties: xl_arith, xl_nbits, and xl_binpt

Each `xfix` number has three properties: the arithmetic type, the bit width, and the binary point position. The **MCode** blocks provide three functions to get these properties of a fixed-point number. The results of these functions are constants and will be evaluated when Simulink compiles the model.

Function `a = xl_arith(x)` returns the arithmetic type of the input number `x`. The return value is either 1, 2, or 3 for `xlUnsigned`, `xlSigned`, or `xlBoolean` respectively.

Function `n = xl_nbits(x)` returns the width of the input number `x`.

Function `b = xl_binpt(x)` returns the binary point position of the input number `x`.

Bit-wise Operators: xl_or, xl_and, xl_xor, and xl_not

The **MCode** block provides four built-in functions for bit-wise logical operations: `xl_or`, `xl_and`, `xl_xor`, and `xl_not`.

Function `xl_or`, `xl_and`, and `xl_xor` perform bit-wise logical or, and, and xor operations respectively. Each function is in the form of

```
x = xl_op(a, b, ...).
```

Each function takes at least two fixed-point numbers and returns a fixed-point number. All the input arguments are aligned at the binary point position.

Function `xl_not` performs a bit-wise logical not operation. It is in the form of `x = xl_not(a)`. It only takes one `xfix` number as its input argument and returns a fixed-point number.

The following are some examples of these function calls:

```
X = xl_and(a, b);
Y = xl_or(a, b, c);
Z = xl_xor(a, b, c, d);
N = xl_not(x);
```

Shift Operators: xl_rsh, and xl_lsh

Functions `xl_lsh` and `xl_rsh` allow you to shift a sequence of bits of a fixed-point number. The function is in the form:

`x = xl_lsh(a, n)` and `x = xl_rsh(a, n)` where `a` is a `xfix` value and `n` is the number of bits to shift.

Left or right shift the fixed-point number by `n` number of bits. The right shift (`xl_rsh`) moves the fixed-point number toward the least significant bit. The left shift (`xl_lsh`) function moves the fixed-point number toward the most significant bit. Both shift functions are a full precision shift. No bits are discarded and the precision of the output is adjusted as needed to accommodate the shifted position of the binary point.

Here are some examples:

```
% left shift a 5 bits
a = xfix({xlSigned, 20, 16, xlRound, xlWrap}, 3.1415926)
b = xl_rsh(a, 5);
```

The output `b` is of type `xlSigned` with 21 bits and the binary point located at bit 21.

Slice Function: xl_slice

Function `xl_slice` allows you to access a sequence of bits of a fixed-point number. The function is in the form:

```
x = xl_slice(a, from_bit, to_bit).
```

Each bit of a fixed-point number is consecutively indexed from zero for the LSB up to the MSB. For example, given an 8-bit wide number with binary point position at zero, the LSB is indexed as 0 and the MSB is indexed as 7. The block will throw an error if the `from_bit` or `to_bit` arguments are out of the bit index range of the input number. The result of the function call is an unsigned fixed-point number with zero binary point position.

Here are some examples:

```
% slice 7 bits from bit 10 to bit 4
b = xl_slice(a, 10, 4);
% to get MSB
c = xl_slice(a, xl_nbits(a)-1, xl_nbits(a)-1);
```

Concatenate Function: xl_concat

Function `x = xl_concat(hi, mid, ..., low)` concatenates two or more fixed-point numbers to form a single fixed-point number. The first input argument occupies the most significant bits, and the last input argument occupies the least significant bits. The output is an unsigned fixed-point number with binary point position at zero.

Reinterpret Function: xl_force

Function `x = xl_force(a, arith, binpt)` forces the output to a new type with `arith` as its new arithmetic type and `binpt` as its new binary point position. The `arith` argument can be one of `xlUnsigned`, `xlSigned`, or `xlBoolean`. The `binpt` argument must be from 0 to the bit width inclusively. Otherwise, the block will throw an error.

State Variables: xl_state

An **MCode** block can have internal state variables that hold their values from one simulation step to the next. A state variable is declared with the MATLAB keyword `persistent` and must be initially assigned with an `xl_state` function call.

The following code models a 4-bit accumulator:

```
function q = accum(din, rst)
    init = 0;
    persistent s, s = xl_state(init, {xlSigned, 4, 0});
    q = s;
    if rst
        s = init;
    else
        s = s + din;
    end
```

The state variable `s` is declared as `persistent`, and the first assignment to `s` is the result of the `xl_state` invocation. The `xl_state` function takes two arguments. The first is the initial value and must be a constant. The second is the precision of the state variable. It can be a type cell array as described in the `xfix` function call. It can also be an `xfix` number. In the above code, if `s = xl_state(init, din)`, then state variable `s` will use `din` as the precision. The `xl_state` function must be assigned to a `persistent` variable.

The `xl_state` function behaves in the following way:

1. In the first cycle of simulation, the `xl_state` function initializes the state variable with the specified precision.
2. In the following cycles of simulation, the `xl_state` function retrieves the state value left from the last clock cycle and assigns the value to the corresponding variable with the specified precision.

`v = xl_state(init, precision)` returns the value of a state variable. The first input argument `init` is the initial value, the second argument `precision` is the precision for this state variable. The argument `precision` can be a cell array in the form of `{type, nbits, binpt}` or `{type, nbits, binpt, quantization, overflow}`. The `precision` argument can also be an `xfix` number.

`v = xl_state(init, precision, maxlen)` returns a vector object. The vector will be initialized with `init` and will have `maxlen` for the maximum length it can be. The vector will be initialized with `init`. For example, `v = xl_state(zeros(1, 8), prec, 8)` creates a vector of 8 zeros, `v = xl_state([], prec, 8)` creates an empty vector with 8 as maximum length, `v = xl_state(0, prec, 8)` creates a vector of one zero as content and with 8 as the maximum length.

Conceptually, a vector state variable is a double ended queue. It has two ends, the front which is the element at address 0 and the back which is the element at length – 1.

Methods available for vector are:

<code>val = v(idx);</code>	Returns the value of element at address <code>idx</code> .
<code>v(idx) = val;</code>	Assigns the element at address <code>idx</code> with <code>val</code> .
<code>f = v.front;</code>	Returns the value of the front end. An error will be thrown if the vector is empty.
<code>v.push_front(val);</code>	Pushes <code>val</code> to the front and then increases the vector length by 1. An error will be thrown if the vector is full.
<code>v.pop_front;</code>	Pops one element from the front and decreases the vector length by 1. An error will be thrown if the vector is empty.
<code>b = v.back;</code>	Returns the value of the back end. An error will be thrown if the vector is empty.
<code>v.push_back(val);</code>	Pushes <code>val</code> to the back and the increases the vector length by 1. An error will be thrown if the vector is full.
<code>v.pop_back;</code>	Pops one element from the back and decreases the vector length by 1. An error will be thrown if the vector is empty.
<code>v.push_front_pop_back(val);</code>	Pushes <code>val</code> to the front and pops one element out from the back. It's a shift operation. The length of the vector is unchanged. The vector cannot be empty to perform this operation.
<code>full = v.full;</code>	Returns <code>true</code> if the vector is full, otherwise, <code>false</code> .

<code>empty = v.empty;</code>	Returns true if the vector is empty, otherwise, false.
<code>len = v.length;</code>	Returns the number of elements in the vector.

A method of a vector that queries a state variable is called a *query method*. It has a return value. The following methods are query method: `v(idx)`, `v.front`, `v.back`, `v.full`, `v.empty`, `v.length`, `v.maxlen`. A method of a vector that changes a state variable is called an *update method*. An update method does not return any value. The following methods are update methods: `v(idx) = val`, `v.push_front(val)`, `v.pop_front`, `v.push_back(val)`, `v.pop_back`, and `v.push_front_pop_back(val)`. All query methods of a vector must be invoked before any update method is invocation during any simulation cycle. An error will be thrown during model compilation if this rule is broken.

The **MCode** block may map a vector state variable into a vector of registers, a delay line, an addressable shift register, a single port ROM, or a single port RAM based on the usage of the state variable. The `xl_state` function can also be used to convert a MATLAB 1-D array into a zero-indexed constant array. If the **MCode** block cannot map a vector state variable into an FPGA device, an error message will be issued during model netlist time. The following are examples of using vector state variables.

Delay Line

The state variable in the following function will be mapped into a delay line.

```
function q = delay(d, lat)
    persistent r, r = xl_state(zeros(1, lat), d, lat);
    q = r.back;
    r.push_front_pop_back(d);
```

Line of Registers

The state variable in the following function will be mapped into a line of registers.

```
function s = sum4(d)
    persistent r, r = xl_state(zeros(1, 4), d);
    S = r(0) + r(1) + r(2) + r(3);
    r.push_front_pop_back(d);
```

Vector of Constants

The state variable in the following function will be mapped into a vector of constants.

```
function s = myadd(a, b, c, d, nbits, binpt)
    p = {xlSigned, nbits, binpt, xlRound, xlSaturate};
    persistent coef, coef = xl_state([3, 7, 3.5, 6.7], p);
    s = a*coef(0) + b*coef(1) + c*coef(2) + c*coef(3);
```

Addressable Shift Register

The state variable in the following function will be mapped into an addressable shift register.

```
function q = addrshr(d, addr, en, depth)
    persistent r, r = xl_state(zeros(1, depth), d);
    q = r(addr);
    if en
        r.push_front_pop_back(d);
    end
```

Single Port ROM

The state variable in the following function will be mapped into a single port ROM.

```
function q = addrsr(contents, addr, arith, nbits, binpt)
    proto = {arith, nbits, binpt};
    persistent mem, mem = xl_state(contents, proto);
    q = mem(addr);
```

Single Port RAM

The state variable in the following function will be mapped into a single port RAM.

```
function dout = ram(addr, we, din, depth, nbits, binpt)
    proto = {xlSigned, nbits, binpt};
    persistent mem, mem = xl_state(zeros(1, depth), proto);
    dout = mem(addr);
    if we
        mem(addr) = din;
    end
```

MATLAB Functions

disp()

Displays the expression value. In order to see the printing on the MATLAB console, the option **Enable printing with disp** must be checked on the **Advanced** tab of the **MCode** block parameters dialog box. The argument can be a string, an **xfix** number, or an **MCode** state variable. If the argument is an **xfix** number, it will print the type, binary value, and double precision value. For example, if variable **x** is assigned with **xfix({xlSigned, 10, 7}, 2.75)**, the **disp(x)** will print the following line:

```
type: Fix_10_7, binary: 010.1100000, double: 2.75
```

If the argument is a vector state variable, **disp()** will print out the type, maximum length, current length, and the binary and double values of all the elements. For each simulation step, when **Enable printing with disp** is on and when a **disp()** function is invoked, a title line will be printed for the corresponding block. The title line includes the block name, Simulink simulation time, and FPGA clock number.

The following **MCode** function shows several examples of using the **disp()** function.

```
function x = testdisp(a, b)
    persistent dly, dly = xl_state(zeros(1, 8), a);
    persistent rom, rom = xl_state([3, 2, 1, 0], a);
    disp('Hello World!');
    disp(['num2str(dly) is ', num2str(dly)]);
    disp('disp(dly) is ');
    disp(dly);
    disp('disp(rom) is ');
    disp(rom);
    a2 = dly.back;
    dly.push_front_pop_back(a);
    x = a + b;
    disp(['a = ', num2str(a), ', ', '...',
    'b = ', num2str(b), ', ', '...',
    'x = ', num2str(x)]);
    disp(num2str(true));
    disp('disp(10) is');
    disp(10);
    disp('disp(-10) is');
```



```
disp(-10);
disp('disp(a) is ');
disp(a);
disp('disp(a == b)');
disp(a==b);
```

The following lines are the result for the first simulation step.

```
xlmcode_testdisp/MCode (Simulink time: 0.000000, FPGA clock: 0)
Hello World!
num2str(dly) is [0.000000, 0.000000, 0.000000, 0.000000, 0.000000,
0.000000, 0.000000, 0.000000]
disp(dly) is
type: Fix_11_7,
maxlen: 8,
length: 8,
0: binary 0000.0000000, double 0.000000,
1: binary 0000.0000000, double 0.000000,
2: binary 0000.0000000, double 0.000000,
3: binary 0000.0000000, double 0.000000,
4: binary 0000.0000000, double 0.000000,
5: binary 0000.0000000, double 0.000000,
6: binary 0000.0000000, double 0.000000,
7: binary 0000.0000000, double 0.000000,
disp(rom) is
type: Fix_11_7,
maxlen: 4,
length: 4,
0: binary 0011.0000000, double 3.0,
1: binary 0010.0000000, double 2.0,
2: binary 0001.0000000, double 1.0,
3: binary 0000.0000000, double 0.0,
a = 0.000000, b = 0.000000, x = 0.000000
1
disp(10) is
type: UFix_4_0, binary: 1010, double: 10.0
disp(-10) is
type: Fix_5_0, binary: 10110, double: -10.0
disp(a) is
type: Fix_11_7, binary: 0000.0000000, double: 0.000000
disp(a == b)
type: Bool, binary: 1, double: 1
```

You can find the above example in the topic [Compiling MATLAB into an FPGA](#).

error()

Displays message and abort function. See Matlab help on this function for more detailed information. Message formatting is not supported by the MCode block. For example:

```
if latency <=0
    error('latency must be a positive');
end
```

isnan()

Returns true for Not-a-Number. `isnan(X)` returns true when `X` is Not-a-Number. `X` must be a scalar value of double or Xilinx fixed-point number. This function is not supported for vectors or matrices. For example:

```
if isnan(incr) & incr == 1
    cnt = cnt + 1;
end
```

NaN()

The `NaN()` function generates an IEEE arithmetic representation for Not-a-Number. A NaN is obtained as a result of mathematically undefined operations like `0.0/0.0` and `inf-inf`. `NaN(1,N)` generates a 1-by-`N` vector of NaN values. Here are examples of using NaN.

```
if x < 0
    z = NaN;
else
    z = x + y;
end
```

num2Str()

Converts a number to a string. `num2str(X)` converts the `X` into a string. `X` can be a scalar value of double, a Xilinx fixed-point number, or a vector state variable. The default number of digits is based on the magnitude of the elements of `X`. Here's an example of `num2str`:

```
if opcode <= 0 | opcode >= 10
    error(['opcode is out of range: ', num2str(opcode)]);
end
```

ones()

The `ones()` function generates a specified number of one values. `ones(1,N)` generates a 1-by-`N` vector of ones. `ones(M,N)` where `M` must be 1. It's usually used with `xl_state()` function call. For example, the following line creates a 1-by-4 vector state variable initialized to [1, 1, 1, 1].

```
persistent m, m = xl_state(ones(1, 4), proto)
```

zeros()

The `zeros()` function generates a specified number of zero values. `zeros(1,N)` generates a 1-by-`N` vector of zeros. `zeros(M,N)` where `M` must be 1. It's usually used with `xl_state()` function call. For example, the following line creates a 1-by-4 vector state variable initialized to [0, 0, 0, 0].

```
persistent m, m = xl_state(zeros(1, 4), proto)
```

FOR Loop

FOR statement is fully unrolled. The following function sums `n` samples.

```
function q = sum(din, n)
    persistent regs, regs = xl_state(zeros(1, 4), din);
    q = reg(0);
    for i = 1:n-1
        q = q + reg(i);
    end
    regs.push_front_pop_back(din);
```

The following function does a bit reverse.

```
function q = bitreverse(d)
    q = xl_slice(d, 0, 0);
    for i = 1:xl_nbits(d)-1
        q = xl_concat(q, xl_slice(d, i, i));
    end
```

Variable Availability

MATLAB code is sequential (i.e., statements are executed in order). The **MCode** block requires that every possible execution path assigns a value to a variable before it is used (except as a left-hand side of an assignment). When this is the case, we say the variable is *available* for use. The **MCode** block will throw an error if its M-code function accesses unavailable variables.

Consider the following M-code:

```
function [x, y, z] = test1(a, b)
    x = a;
    if a>b
        x = a + b; y = a;
    end
    switch a
        case 0
            z = a + b;
        case 1
            z = a - b;
    end
```


Here *a*, *b*, and *x* are available, but *y* and *z* are not. Variable *y* is not available because the **if** statement has no **else**, and variable *z* is not available because the **switch** statement has no **otherwise** part.

DEBUG MCode


There are two ways to debug your **MCode**. One is to insert `disp()` functions in your code and enable printing; the other is to use the MATLAB debugger. For usage of the `disp()` function, please reference the topic [disp\(\)](#).

If you want to use the MATLAB debugger, you need to check the **Enable MATLAB debugging** option on the **Advanced** tab of the **MCode** block parameters dialog box. Then you can open your MATLAB function with the MATLAB editor, set break points, and debug your M-function. Just be aware that every time you modify your script, you need to execute a `clear functions` command in the MATLAB console.


To start debugging your M-function, you need to first check the **Enable MATLAB debugging** checkbox on the **Advanced** tab of the **MCode** block parameters dialog, then click the **OK** or **Apply** button.

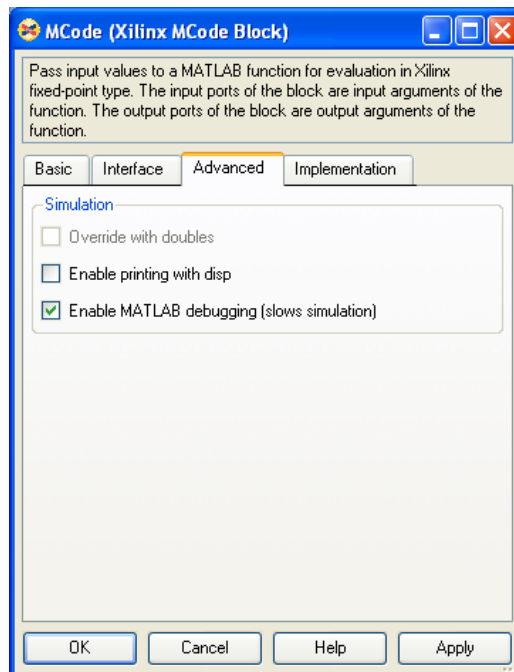


Now you can edit the M-file with the MATLAB editor and set break points as needed.

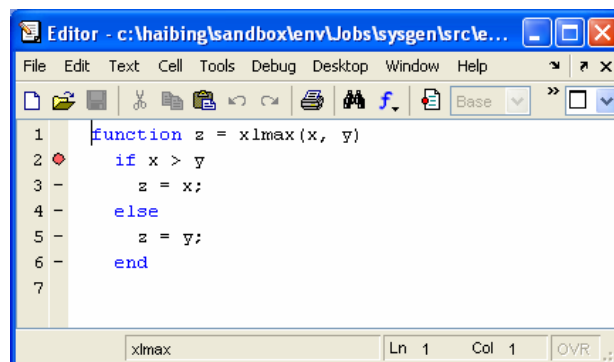

During the Simulink simulation, the MATLAB debugger will stop at the break points you set when the break points are reached.

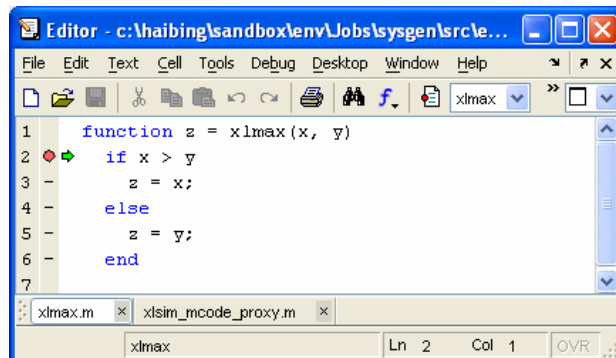

When debugging, you can also examine the values of the variables by typing the variable names in the MATLAB console.

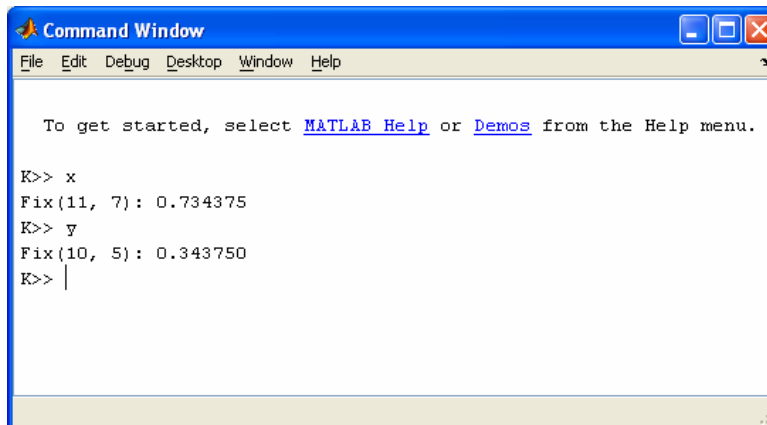

There is one special case to consider when the function for an **MCode** block is executed from the MATLAB debugger. A `switch/case` expression inside an **MCode** block must be type `xfix`, however, executing a `switch/case` expression from the MATLAB console requires that the expression be a `double` or `char`. To facilitate execution in the MATLAB console, a call to `double()` must be added. For example, consider the following:

```
switch i
case 0
    x = 1;
case 1
    x = 2;
end
```

where `i` is type `xfix`. To run from the console this code must be changed to

```
switch double(i)
case 0
    x = 1;
case 1
    x = 2;
end
```

The `double()` function call only has an effect when the M code is run from the console. The **MCode** block ignores the `double()` call.



Passing Parameters

It is possible to use the same M-function in different **MCode** blocks, passing different parameters to the M-function so that each block may behave differently. This is achieved by binding input arguments to some values. To bind the input arguments, select the **Interface** tab on the block GUI. After you bind those arguments to some values, these M-function arguments will not be shown as input ports of the **MCode** block.


Consider for example, the following M-function:

```
function dout = xl_sconvert(din, nbits, binpt)
proto = {xlSigned, nbits, binpt};
dout = xfix(proto, din);
```

The following figures shows how the bindings are set for the **din** input of two separate **xl_sconvert** blocks.

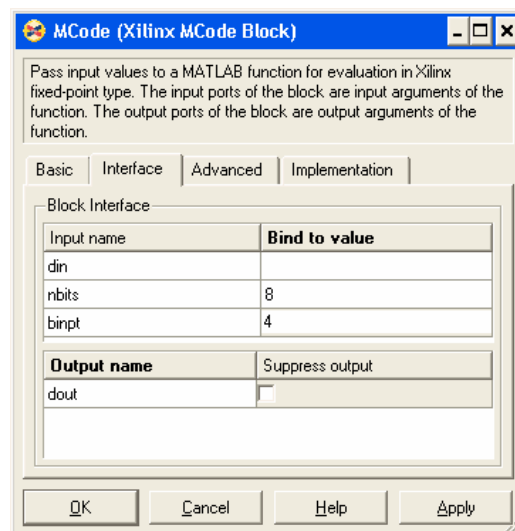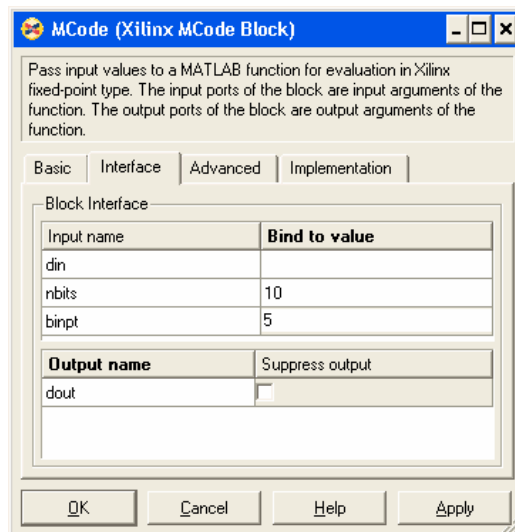

The following figure shows the block diagram after the model is compiled.

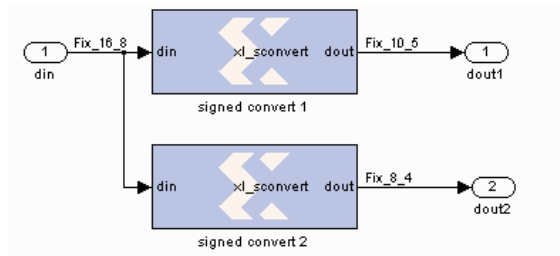

The parameters can only be of type double or they can be logical numbers.


Optional Input Ports

The parameter passing mechanism allows the **MCode** block to have optional input ports. Consider for example, the following M-function:

```
function s = xl_m_addsub(a, b, sub)
    if sub
        s = a - b;
    else
        s = a + b;
    end
end
```

If `sub` is set to be `false`, the **MCode** block that uses this M-function will have two input ports `a` and `b` and will perform full precision addition. If it is set to an empty cell array `{}`, the block will have three input ports `a`, `b`, and `sub` and will perform full precision addition or subtraction based on the value of input port `sub`.

The following figure shows the block diagram of two blocks using the same `xl_m_addsub` function, one having two input ports and one having three input ports.

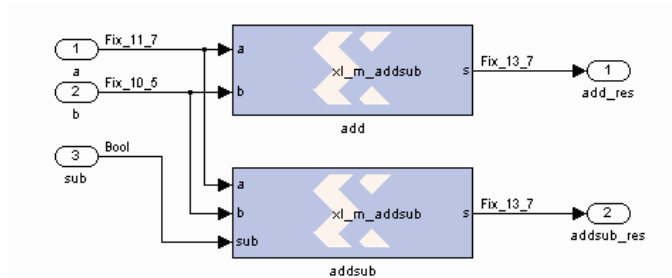

Constructing a State Machine

There are two ways to build a state machine using an **MCode** block. One way is to specify a stateless transition function using a MATLAB function and pair an **MCode** block with one or more state register blocks. Usually the **MCode** block drives a register with the value representing the next state, and the register feeds back the current state into the **MCode** block. For this to work, the precision of the state output from the **MCode** block must be static, that is, independent of any inputs to the block. Occasionally you may find you need to use `xfix()` conversions to force static precision. The following code illustrates this:

```
function nextstate = fsm1(currentstate, din)
% some other code
nextstate = currentstate;
switch currentstate
    case 0, if din==1, nextstate = 1; end
end
% a xfix call should be used at the end
nextstate = xfix({xlUnsigned, 2, 0}, nextstate);
```

Another way is to use state variables. The above function can be re-written as follows:

```
function currentstate = fsm1(din)
persistent state, state=xl_state(0, {xlUnsigned, 2, 0});
currentstate = state;
switch double(state)
    case 0, if din==1; state = 1; end
end
```

Reset and Enable Signals for State Variables

The **MCode** block can automatically infer register reset and enable signals for state variables when conditional assignments to the variables contain two or fewer branches.

For example, the following M-code infers an enable signal for conditional assignment of **persistent** state variable `r1`:

```
function myFn = aFn(en, a)
persistent r1, r1 = xl_state(0, {xlUnsigned, 2, 0});
myFn = r1;
if en
    r1 = r1 + a
else
    r1 = r1
end
```

There are two branches in the conditional assignment to persistent state variable `r1`. A register is used to perform the conditional assignment. The input of the register is connected to `r1 + a`, the output of the register is `r1`. The register's enable signal is inferred; the enable signal is connected to `en`, when `en` is asserted. Persistent state variable `r1` is assigned to `r1 + a` when `en` evaluates to `false`, the enable signal on the register is de-asserted resulting in the assignment of `r1` to `r1`.

The following M-code will also infer an enable signal on the register used to perform the conditional assignment:

```
function myFn = aFn(en, a)
    persistent r1, r1 = xl_state(0, {xlUnsigned, 2, 0});
    myFn = r1;
    if en
        r1 = r1 + a
    end
```

An enable is inferred instead of a reset because the conditional assignment of persistent state variable `r1` is to a non-constant value, `r1 + a`.

If there were three branches in the conditional assignment of persistent state variable `r1`, the enable signal would not be inferred. The following M-code illustrates the case where there are three branches in the conditional assignment of persistent state variable `r1` and the enable signal is not inferred:

```
function myFn = aFn(en, en2, a, b)
    persistent r1, r1 = xl_state(0, {xlUnsigned, 2, 0});
    if en
        r1 = r1 + a
    elseif en2
        r1 = r1 + b
    else
        r1 = r1
    end
    v
```

The reset signal can be inferred if a persistent state variable is conditionally assigned to a constant; the reset is synchronous. Consider the following M-code example which infers a reset signal for the assignment of persistent state variable `r1` to `init`, a constant, when `rst` evaluates to true and `r1 + 1` otherwise:

```
function myFn = aFn(rst)
    persistent r1, r1 = xl_state(0, {xlUnsigned, 4, 0});
    myFn = r1;
    init = 7;
    if (rst)
        r1 = init
    else
        r1 = r1 + 1
    end
```

The M-code example above which infers reset can also be written as:

```
function myFn = aFn(rst)
    persistent r1, r1 = xl_state(0, {xlUnsigned, 4, 0});
    init = 1;
    myFn = r1;
    r1 = r1 + 1
    if (rst)
        r1 = init
    end
```

In both code examples above, the reset signal of the register containing persistent state variable `r1` is assigned to `rst`. When `rst` evaluates to true, the register's reset input is asserted and the persistent state variable is assigned to constant `init`. When `rst` evaluates to false, the register's reset input is de-asserted and persistent state variable `r1` is assigned to `r1 + 1`. Again, if the conditional assignment of a persistent state variable contains three or more branches, a reset signal is not inferred on the persistent state variable's register.

It is possible to infer reset and enable signals on the register of a single persistent state variable. The following M-code example illustrates simultaneous inference of reset and enable signals for the persistent state variable `r1`:

```
function myFn = aFn(rst,en)
    persistent r1, r1 = xl_state(0, {xlUnsigned, 4, 0});
    myFn = r1;
    init = 0;
    if rst
        r1 = init
    else
        if en
            r1 = r1 + 1
        end
    end
end
```

The reset input for the register of persistent state variable `r1` is connected to `rst`; when `rst` evaluates to `true`, the register's reset input is asserted and `r1` is assigned to `init`. The enable input of the register is connected to `en`; when `en` evaluates to `true`, the register's enable input is asserted and `r1` is assigned to `r1 + 1`. It is important to note that an inferred reset signal takes precedence over an inferred enable signal regardless of the order of the conditional assignment statements. Consider the second code example above; if both `rst` and `en` evaluate to `true`, persistent state variable `r1` would be assigned to `init`.

Inference of reset and enable signals also works for conditional assignment of persistent state variables using switch statements, provided the switch statements contain two or less branches.

The **MCode** block performs dead code elimination and constant propagation compiler optimizations when generating code for the FPGA. This can result in the inference of reset and/or enable signals in conditional assignment of persistent state variables, when one of the branches is never executed. For this to occur, the conditional must contain two branches that are executed after dead code is eliminated and constant propagation is performed.

Pipelining Combinational Logic

The generated FPGA bitstream for an MCode block may contain many levels of combinational logic and hence a large critical path delay. To allow a downstream logic synthesis tool to automatically pipeline the combinational logic, you can add delay blocks before the MCode block inputs or after the MCode block outputs. These delay blocks should have the parameter **Implement using behavioral HDL** set, which instructs the code generator to implement delay with synthesizable HDL. You can then instruct the downstream logic synthesis tool to implement register re-timing or register balancing. As an alternative approach, you can use the vector state variables to model delays.

Shift Operations with Multiplication and Division

The **MCode** block can detect when a number is multiplied or divided by constants that are powers of two. If detected, the **MCode** block will perform a shift operation. For example, multiplying by 4 is equivalent to left shifting 2 bits and dividing by 8 is equivalent to right shifting 3 bits. A shift is implemented by adjusting the binary point, expanding the `xfix` container as needed. For example, a `Fix_8_4` number multiplied by 4 will result in a `Fix_8_2` number, and a `Fix_8_4` number multiplied by 64 will result in a `Fix_10_0` number.


Using the xl_state Function with Rounding Mode

The `xl_state` function call creates an `xfix` container for the state variable. The container's precision is specified by the second argument passed to the `xl_state` function call. If precision uses `xlRound` for its rounding mode, hardware resources will be added to accomplish the rounding. If rounding the initial value is all that is required, an `xfix` call to round a constant does not require additional hardware resources. The rounded value can then be passed to the `xl_state` function. For example:

```
init = xfix({xlSigned,8,5,xlRound,xlWrap}, 3.14159);  
persistent s, s = xl_state(init, {xlSigned, 8, 5});
```

Block Parameters Dialog Box

The block parameters dialog box can be invoked by double-clicking the block icon in a Simulink model.

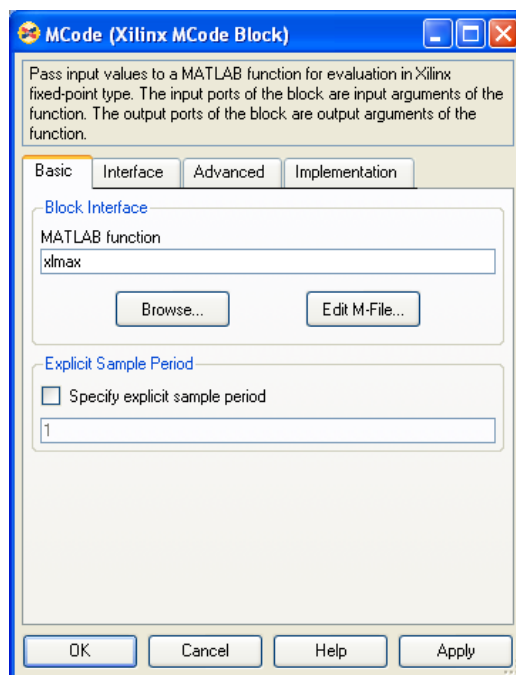


As described earlier in this topic, the **MATLAB function** parameter on an **MCode** block tells the name of the block's function, and the **Interface** tab specifies a list of constant inputs and their values.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


MicroBlaze Processor

This block is listed in the following Xilinx Blockset libraries: *Control and Index*.

This block is now obsolete. Please use the EDK Processor block instead.



The Xilinx MicroBlaze™ Processor block provides a way to design and simulate peripherals created to target the EDK MicroBlaze Processor. As shown in the figure below, you can connect customized IP to the MicroBlaze via Fast Simplex Links (FSLs) that are available on the processor. FSLs can be thought of as unidirectional FIFOs. The MicroBlaze can include a maximum of eight input and eight output FSLs (a total of 16). Both synchronous and asynchronous FIFOs can be used; users can create System Generator peripherals that run synchronously or asynchronously to the MicroBlaze processor. As depicted in the figure below, instanting of the FSL FIFOs is left to the [EDK tool](#) (Embedded Development Kit). Simulation of such systems may be done via hardware co-simulation. Creation, management and configuration of the simulation model is accessed via the block parameter mask and will be explained in further detail in the following text.

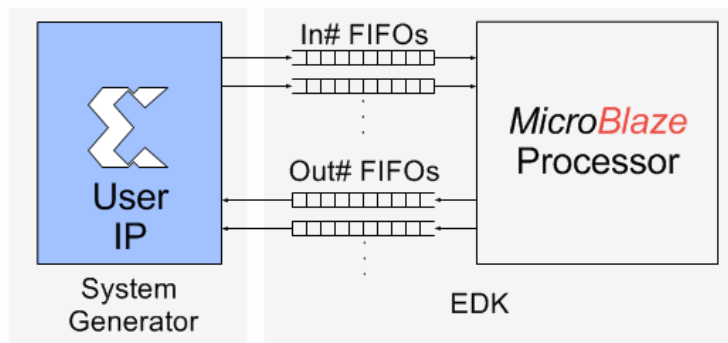

Block Interface

In the following discussion, the symbol # represents a number from 0 to 7. The block has a user-configurable number of input and output interfaces. For each input interface, 4 ports are created: 3 input ports (In#_data, In#_control and In#_write) and 1 output port (In#_full). Similarly, 4 ports are also created for each output interface: 1 input port (Out#_read) and 3 output ports (Out#_data, Out#_control and Out#_exists). A maximum of 8 input and 8 output interfaces are supported. An optional Rst port is made available on selecting the **Provide Reset Port** option. Note that the Rst port will appear as an output port on the MicroBlaze™ Processor block. This port can be connected to any of the asynchronous reset ports/pins on the MicroBlaze (from the EDK environment), and provides a way for the MicroBlaze to reset any connected System Generator designs.

Port Descriptions


Descriptions of the ports are available in the table below.

Port Name	Port Type	Port Width (Bits)	Port Description	FSL Connection
In#_data	Input	32	Data to be written to the FSL FIFO	Masters the FSL connection, i.e. writing to the FSL FIFO.
In#_control	Input	1	Flag bit. High indicates that data written onto the FIFO is a control word	
In#_write	Input	1	High enables writing to an FSL FIFO on which the EDK MicroBlaze is connected as a Slave Peripheral	
In#_full	Output	1	High indicates that the FSL FIFO is full	
Out#_data	Output	32	Data read from the FSL FIFO	Slave to the FSL connection, i.e. reading from the FSL FIFO.
Out#_control	Output	1	Flag bit. High indicates that data read from the FIFO is a control word	
Out#_read	Input	1	High enables reading from an FSL FIFO on which the EDK MicroBlaze is connected as a Master Peripheral	
Out#exists	Output	1	High indicates that the FIFO is non-empty.	
Rst	Output	1	Indicates the state of an asynchronous Reset port/pin	N/A

The timing relationship between the various signals on the ports for successful read and write operations are depicted in timing diagrams that follow.


Write Operations

As shown in the timing diagram for a Write operation below, if `In#_full` is low and `In#_write` is driven high, the value of `In#_data` is written into the FIFO. The `In#_full` signal is high when the FIFO is full, writes to the FIFO when `In#_full` is high will be ignored. `In#` ports Masters the FSL that it connects to, and must be configured as a Master peripheral in the EDK project.

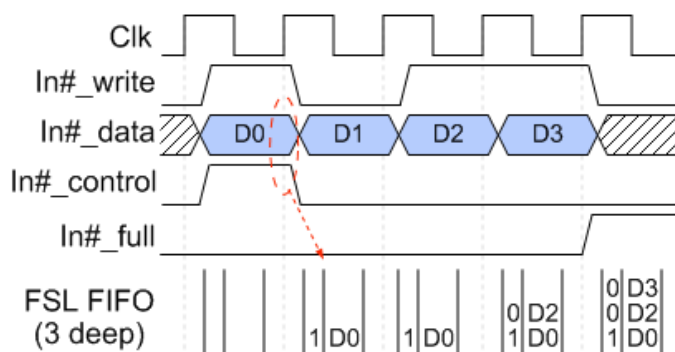

Read Operations

As shown in the timing diagram for a Read operation below, setting `Out#_read` to high when `Out#_exists` is also high, causes the first data item in the FIFO to be read. The data read is available on the `Out#_data` port. The `Out#_exists` signal goes low when the FIFO is empty. Reading from an empty FIFO returns an undefined value. `Out#` ports are Slaves to the FSL that it connects to, and must be configured as a Slave peripheral in the EDK project.

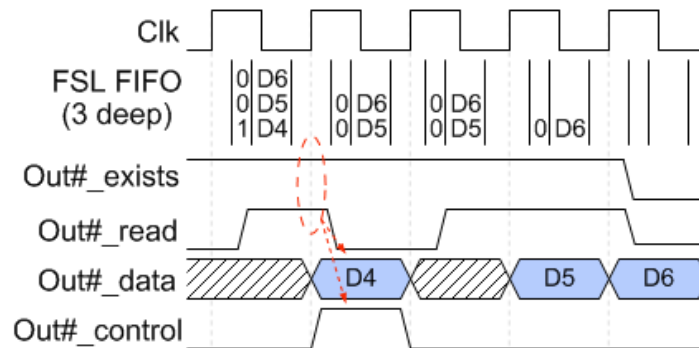

After designing the FSL peripherals in System Generator, the model must be exported to the EDK environment using the EDK Export Tool. System Generator, in addition to VHDL source code, generates a Microprocessor Peripheral Definition (MPD) file, a Peripheral Analyze Order (PAO) file and a Black Box Definition (BBD) file for this block. Refer to the [EDK Export Tool](#) for more information.

Note: The mapping of `In#` and `Out#` to FSLs is completely controlled by the user from within the EDK environment. That is, `In0` will not necessarily be connected to `SFSL0`, `Out0` will not necessarily be connected to `MSFL0` and so on.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

General tab

The General tab contains parameters that customizes the MicroBlaze™ Processor, and enables the hardware co-simulation feature of the block.

Parameters specific to the General tab are as follows:

- **Number of Input Interfaces:** Determines the number of System Generator to MicroBlaze FSL interfaces. The block interface is appropriately configured with a number of input and output ports. The number of input interfaces must be less than or equal to 8.
- **Number of Output Interfaces:** Determines the number of MicroBlaze to System Generator FSL interfaces. The block interface is appropriately configured with a number of input and output ports. The number of output interfaces must be less than or equal to 8.
- **Provide Reset Port:** Adds an output port "Rst" on the block interface. This provides a way for you to allow the System Generator design to be reset by the MicroBlaze.
- **Provide Processor Model:** Enables the hardware co-simulation feature of the MicroBlaze. Selecting the Provide Processor Model checkbox will enable the Hardware and Software tabs

Hardware tab

The General tab contains parameters that customizes the MicroBlaze Processor, and enables the hardware co-simulation feature of the block.

Parameters specific to the Hardware tab are as follows:

- **Simulation Model:** The System Generator processor core cache will be empty when the block is first used, so no simulation models will be available in the 'Simulation Model' pull down menu.
A simulation model must be tied to a hardware platform (board) so that the MicroBlaze processor is aware of board specific information, such as whether a RS232 port is available. If a simulation model is present in the core cache, it will be listed in the 'Simulation Model' pull down menu under its compilation target (board) name, e.g. companyxyz_boardnm_partnm_packagenum_rev_1.
- **Add Simulation Model:** Clicking on the **Add Simulation Model** button causes the 'Hardware Co-Simulation Targets' dialog box to appear. This allows a compilation target to be specified. (Refer to the topic [System Generator Compilation Types](#) for more information.) Clicking the **Generate** button sets in motion the following series of compilations that may take sometime to complete:
 - a. An EDK project is created in the Target Directory specified in the System Generator token block. (XPS)
 - b. The EDK project is netlisted. (EDK+XFlow)
 - c. A hardware co-simulation token is created out of the EDK netlists, and saved in the System Generator core cache. (System Generator, XFlow)
 - d. EDK software libraries are compiled. (EDK)

Note: When you create a new board support package (topic [Using SBDBuilder](#)), it is important to specify the board's system Reset and RS232 ports as non-memory mapped ports, otherwise they will not be correctly routed. Further, the port name for the reset port should be labeled as 'Reset', the port name for the receive port of the RS232 port should be labeled as 'RXD' and the transmit port should be labeled as 'TXD'. Labeling these ports in this manner allows System Generator to correctly detect and route the signals to the relevant pins.


If a RS232 port is available, a UART with the following parameters is created in the MicroBlaze:

Baud rate (bits per second): 115200, Data bits: 8, Parity: None, Stop bits: 1, Flow control: none. The stdin and stdout channels will be mapped to the UART, allowing for input and output via the RS232

Software tab

The Software Tab provides buttons to edit and compile the source code that will execute in the simulation model.

- **Edit Source Code:** Clicking on the **Edit Source Code** button will bring up the source code associated with this MicroBlaze block. This code is used only by the simulation model.

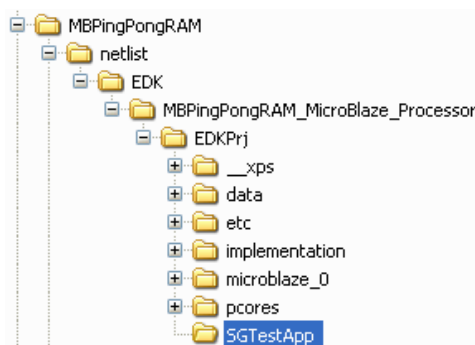

The figure above shows the directory structure created by System Generator. In this case, **MBPingPongRAM** is the name of the Simulink model and **netlist** is the user specified Target Directory. The EDK project is generated under a directory created by appending the model name to the MicroBlaze's full path. The source code associated with the block is kept in the highlighted directory; SGTestApp, and is called MainProg.c.

The default MATLAB editor is used to edit the source file. This is a user configurable option in MATLAB and can be edited from the MATLAB menu bar: **File > Preferences**, under the **Editor/Debugger** section.

- **Compile Source Code:** Clicking on 'Compile Source Code' compiled the source code and updates the hardware co-simulation bit file with the binary code created.

MicroBlaze Software Issues

Accessing FSL Peripherals from Software

System Generator peripherals can be accessed by the MicroBlaze™ through assembly instructions that access the relevant FSLs. The EDK provides eight C macros that simplifies read and writes to FSLs. Please refer to the [EDK documentation](#) for more details.

Non-Blocking Data Read and Write

```
microblaze_nbread_datafsl(val,id);
```

```
microblaze_nbwrite_datafsl(val,id);
```

Non-Blocking Control Read and Write

```
microblaze_nbread_cntlfsl(val,id);
```

```
microblaze_nbwrite_cntlfsl(val,id);
```

Blocking Data Read and Write

```
microblaze_bread_datafsl(val,id);
```

```
microblaze_bwrite_datafsl(val,id);
```

Blocking Control Read and write

```
microblaze_bread_cntlfsl(val,id);
```

```
microblaze_bwrite_cntlfsl(val,id);
```

In the macro calls shown above, val refers to the 32-bit data value that will be read or written to the FSL. The id parameter refers to the FSL being accessed. Blocking read or write will stall the MicroBlaze until a read or write can occur. Non-blocking read or writes will not stall the MicroBlaze even if a read or write was unable to complete. A data write will write val to the FSL's data port and a 0 (zero) to the FSL's control port. A control write will write val to the FSL's data port and a 1 (one) to the FSL's control port. Please refer to the [EDK MicroBlaze documentation](#) and the following System Generator tutorials for more information:


- [Designing and Exporting MicroBlaze Processor Peripherals](#)
- [Tutorial Example - Designing and Simulating MicroBlaze Processor Systems](#)

Correspondence Between EDK FSL Buses and System Generator Ports

It is important to understand the difference between FSL instances and FSL bus connections in the EDK. The MicroBlaze contains sixteen bus connections that can connect to FSLs (or any peripheral that mimics the FSL interface). Eight of these bus connections are inputs and are called SFSL (for Slave FSL) in the EDK. The other eight bus connections

are outputs and are called MFSL (for Master FSL) in the EDK. FSL instances refer to the physical implementation of the FIFO hardware which makes up an FSL.

In the EDK, the SFSL and MFSL bus connection numbers are independent to FSL instances. In other words, SFSL0 need not be connect to instance 0 of an FSL and similarly MFSL1 need not be connected to instance 1 of an FSL. This means that in a System Generator block, port In0_* need not be connected to SFSL0. The consequence of this is that a user has to be aware of the FSL connectivity to write correct software code. The assumption that a `microblaze_nbwrite_datafsl` instruction to FSL0 will output data to System Generator in Out0_*, is not necessarily correct.



The access functions provided by the EDK for accessing FSLs, refer to FSL bus connections and not FSL instances. The figure above shows a System Generator MicroBlaze block, with a MicroBlaze that has been manually configured (the inner box). The MicroBlaze processor that the System Generator block represents is also shown (the outer box). Here In0 is connected to bus connection SFSL2 and In1 to SFSL3.

In the case shown above, software code written to access data from In0 should access SFSL2. A non-blocking data read from In0 would thus be:

```
int val;
microblaze_nbread_datafsl(val, 2);
```

Similarly a non-block write to Out0 would be:

```
microblaze_nbwrite_datafsl(val, 0);
```

Reading and Writing to FSLs During Simulation

Normally, when exporting to the EDK, it is your responsibility to wire up bus connections. During simulation, System Generator provides a pre-configured MicroBlaze; In 0-7 is connected to SFSL 0-7, Out 0-7 is connected to MFSL 0-7.

During simulation, reading from FSL id 0, corresponds to reading from In0. Writing to FSL id 0 corresponds to writing to Out0.

FSL Read and Write Errors

The MicroBlaze EDK documentation uses the big-endian naming convention to label buses. To be consistent with that document, the following discussions will also use the big-endian naming convention; bit 0 corresponds to the most significant bit.

The MicroBlaze Status Register (MSR) stores status conditions in the MicroBlaze and can be used to determine if errors have occurred.

Reading the MSR Register for Error Condition

Errors that occur during FSL read and write operations are returned to the MicroBlaze MSR register. The MSR register can be read using the `mfs` MicroBlaze assembly instruction. It is recommended that the following macro be used to read the MSR register.

```
#define readmsr(val, dep) asm("mfs %0,rmsr" : "=d" (##val##) : "d"
(dep))
```

Define the macro at the top of your C program and use it in the following manner:

```
int val, mymsr;
microblaze_nbread_cntlfsl(val, 0);
readmsr(mymsr, val);
```

The macro establishes dependence between the writing of the `val` register and the reading of the MSR register. This is especially important when used within a loop; if a dependency is not created, the compiler may move the `mfs` instruction out of the loop, when it performs software code optimizations.

FSL Read Errors

Reads from FSLs can fail in two possible ways: *data invalid* and *FSL error*. A *data invalid* occurs when a blocking or non-blocking read fails because there is no data in the FSL. An *FSL error* occurs when a blocking or non-blocking control read is used to read a data value that does not have the control flag set to one. Similarly, an *FSL error* also occurs when a blocking or non-blocking data read is used to read a data value that has the control flag set to one.

When a *data invalid* error occurs, the MSR's carry flag is set high. The mask for the carry flag is 0x4 and corresponds to bit 29. The carry flag is also replicated on the most significant bit (bit 0) of the MSR register.

When an *FSL error* occurs, the FSL flag is set high. The mask for the FSL flag is 0x10 and corresponds to bit 27.

FSL Write Errors

Writes to FSLs fail if the FSL being written is full. Both blocking and non-blocking writes return a *data invalid* error when attempts to write to a full FSL are detected.

When a *data invalid* error occurs, the MSR's carry flag is set high. The mask for the carry flag is 0x4 and corresponds to bit 29. The carry flag is also replicated on the most significant bit (bit 0) of the MSR register.

Known Issues

- Only one MicroBlaze block per design is supported. However, it is possible to connect multiple MicroBlaze blocks to the created FSL interfaces from the EDK side.
- The MicroBlaze must be instantiated on the top level when exporting to EDK. When using hardware co-simulation model, it is important to guard FSL reads and writes and check for error conditions. When simulation starts, the MicroBlaze program will execute in hardware and may read or write from FSLs before the System Generator model has a chance to execute. Refer to the topics [Tutorial Example - Designing and Simulating MicroBlaze Processor Systems](#) and [EDK Export Tool](#) for a full explanation.
- Verilog netlisting is not supported for this block.

Online Documentation for the MicroBlaze Processor

More information for the MicroBlaze™ can be found at

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=micro_blaze

See Also


[Designing and Exporting MicroBlaze Processor Peripherals](#)

[Tutorial Example - Designing and Simulating MicroBlaze Processor Systems](#)

[EDK Export Tool](#)

ModelSim

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The System Generator **Black Box** block provides a way to incorporate existing HDL files into a model. When the model is simulated, co-simulation can be used to allow black boxes to participate. The ModelSim HDL co-simulation block configures and controls co-simulation for one or several black boxes.

During a simulation, each ModelSim block spawns one copy of ModelSim, and therefore uses one ModelSim license. If licenses are scarce, several black boxes can share the same block.

In detail, the ModelSim block does the following:

- Constructs the additional VHDL and Verilog needed to allow black box HDL to be simulated inside ModelSim.
- Spawns a ModelSim session when a Simulink simulation starts.
- Mediates the communication between Simulink and ModelSim.
- Reports if errors are detected when black box HDL is compiled.
- Terminates ModelSim, if appropriate, when the simulation is complete.

Note: The ModelSim block only supports symbolic radix in the ModelSim tool. In symbolic radix, ModelSim displays the actual values of an enumerated type and also converts an object's value to an appropriate representation for other radix forms. Please refer to the ModelSim documentation for more information on symbolic radix.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

Run co-simulation in directory: ModelSim is started in the directory named by this field. The directory is created if necessary. All black box files are copied into this directory, as are the auxiliary files System Generator produces for co-simulation. Existing files are overwritten silently. The directory can be specified as an absolute or relative path. Relative paths are interpreted with respect to the directory in which the Simulink .mdl file resides.

Open waveform viewer: When this checkbox is selected, the ModelSim waveform window opens automatically, displaying a standard set of signals. The signals include all inputs and outputs of all black boxes and all clock and clock enable signals supplied by System Generator. The signal display can be customized with an auxiliary tcl script. To specify the script, select Add Custom Scripts and enter the script name (e.g., myscript.do) in the Script to Run After vsim field. An example showing a customized waveform viewer is included in <sysgen_tree>/examples/black_box/example5. This example is in the topic [Advanced Black Box Example Using ModelSim](#).

Leave ModelSim open at end of simulation: When this checkbox is selected, the ModelSim session is left open after the Simulink simulation has finished.

Skip compilation (use previous results): When this checkbox is selected, the ModelSim compilation phase is skipped in its entirety for all black boxes that are using the ModelSim

block for HDL co-simulation. To select this option is to assert that: (1) underneath the directory in which ModelSim will run, there exists a ModelSim work directory, and (2) that the work directory contains up-to-date ModelSim compilation results for all black box HDL. Selecting this option can greatly reduce the time required to start-up the simulation, however, if it is selected when inappropriate, the simulation can fail to run or run but produce false results.

Advanced tab

Parameters specific to the Advanced tab are as follows:

Include Verilog unisim library: Selecting this checkbox ensures that ModelSim includes the Verilog UniSim library during simulation. Note: the Verilog unisim library must be mapped to UNISIMS_VER in ModelSim. In addition, selecting this checkbox ensures the "glbl.v" module is compiled and invoked during simulation.

Add custom scripts: The term "script" refers to a Tcl macro file (DO file) executed by ModelSim. Selecting this checkbox activates the fields **Script to Run Before Starting Compilation**, **Script to Run in Place of "vsim"**, and **Script to Run after "vsim"**. The DO file scripts named in these fields are not run unless this checkbox is selected.

Script to run before starting compilation: Enter the name of a Tcl macro file (DO file) that is to be executed by ModelSim before compiling black box HDL files.

Note: For information on how to write a ModelSim macro file (DO file) refer to the Chapter in the ModelSim User's Manual titled **Tcl and macros (DO files)**.

Script to run in place of "vsim": ModelSim uses Tcl (tool command language) as the scripting language for controlling and extending the tool. Enter the name of a ModelSim Tcl macro file (DO file) that is to be executed by the ModelSim **do** command at the point when System Generator would ordinarily instruct ModelSim to begin a simulation. To start the simulation after the macro file starts executing, you must place a **vsim** command inside the macro file.

Normally, if this parameter is left blank, or Add custom scripts is not selected, then System Generator instructs ModelSim to execute the default command **vsim \$toplevel -title {System Generator Co-Simulation (from block \$blockname)}** Here **\$toplevel** is the name of the top level entity for simulation (e.g., work.my_model_mti_block) and **\$blockname** is the name of the ModelSim block in the Simulink model associated with the current co-simulation. To avoid problems, certain characters in the block name (e.g., newlines) are sanitized.

If this parameter is not blank and **Add custom scripts** is selected, then System Generator instead instructs ModelSim to execute **do \$* \$toplevel \$blockname**. Here **\$toplevel** and **\$blockname** are as above and **\$*** represents the literal text entered in the field. If, for example the literal text is 'foo.do', then ModelSim executes **foo.do**. This macro file can then reference **\$toplevel** and **\$blockname** as \$1 and \$2, respectively. Thus, the command **vsim \$1** inside of the macro file **foo.do** runs vsim on topLevel.


Script to run after "vsim": Enter the name of a Tcl macro file (DO file) that is to be executed by ModelSim after all the HDL for black boxes has been successfully compiled, and after the ModelSim simulation has completed successfully. If the **Open Waveform Viewer** checkbox has been selected, System Generator issues all commands it ordinarily uses to open and customize the waveform viewer before running this script. This allows you to customize the waveform viewer as desired (either by adding signals to the default viewer or by creating a fully custom viewer). The black box tutorial includes an example that customizes the waveform viewer.

It is often convenient to use relative paths in a custom script. Relative paths are interpreted with respect to the directory that contains the model's MDL file. A relative path in the Run co-simulation in directory field is also interpreted with respect to the directory that contains the model's MDL file. Thus, for example, if Run co-Simulation in directory specifies `./modelsim` as the directory in which ModelSim should run, the relative path `../foo.do` in a script definition field refers to a file named `foo.do` in the directory that contains the `.mdl`.


Fine Points

The time scale in ModelSim matches that in Simulink, i.e., one second of Simulink simulation time corresponds to one second of ModelSim simulation time. This makes it easy to compare times at which events occur in the two settings. The typically large Simulink time scale is also useful because it allows System Generator to schedule events without running into problems related to the timing characteristics of the HDL model. Users needn't worry too much about the details System Generator event scheduling in co-simulation models. The following example is offered to illustrate the broader points.


This example model shown here can be found in the System Generator directory `<sysgen_tree>/example/black_box/example4`. The example is also discussed in the topic [Importing a Verilog Module](#).

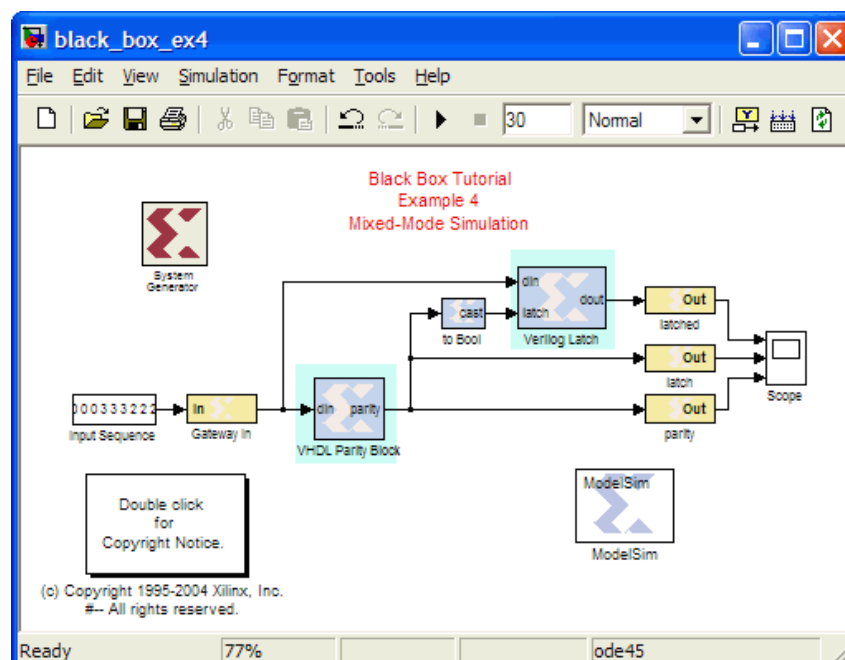


When the above model is run, the following waveforms are displayed by ModelSim:

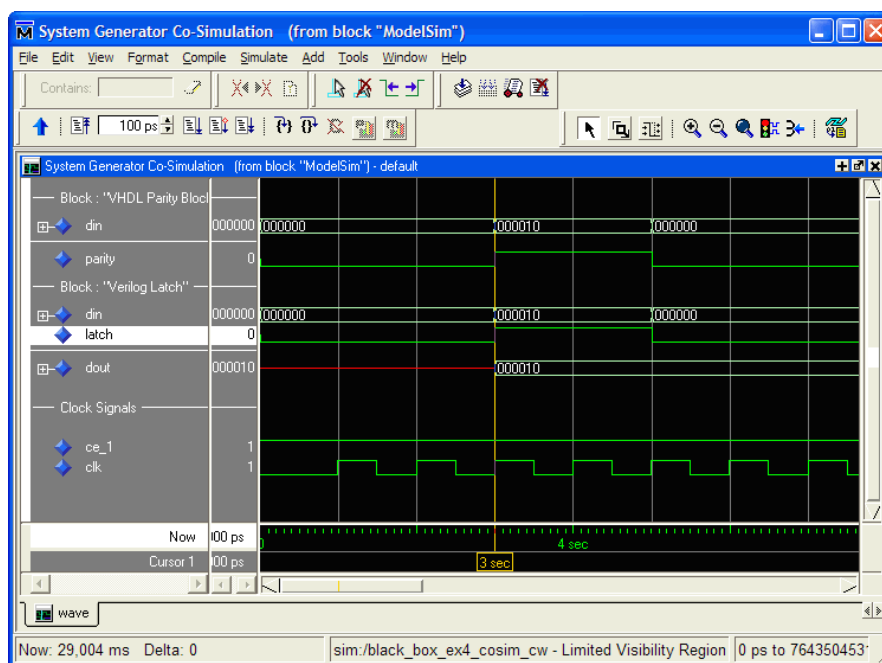

At the time scale presented here (the above shows a time interval of six seconds), the rising clock edge at three seconds and the corresponding transmission of data through each of the two black boxes appear simultaneous, much as they do in the Simulink simulation. Looking at the model, however, it is clear that the output of the first black box feeds the second black box. Both of the black boxes in this model have combinational feed-throughs, i.e., changes on inputs translate into immediate changes on outputs. Zooming in toward the three second event reveals how System Generator has resolved the dependencies. Note the displayed time interval has shrunk to ~20 ms.

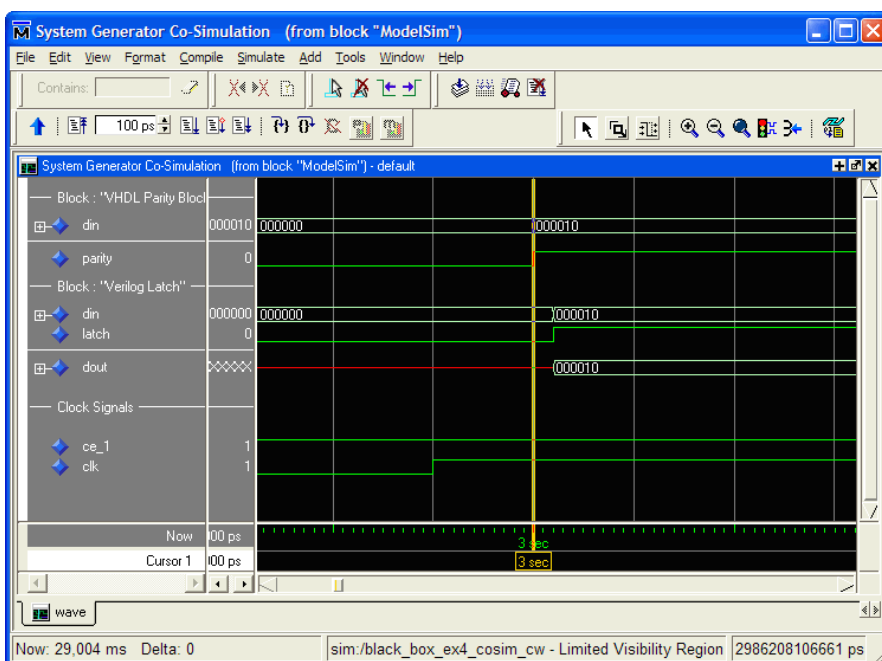


The above figure reveals that System Generator has shifted the rising clock edge so it occurs before the input value is collected from Simulink and presented to the first of the black boxes. It then allows the value to propagate through the first black box and presents the result to the second at a slightly later time. Zooming in still further shows that the HDL model for the first black box includes a propagation delay which System Generator has effectively abstracted away through the use of large time scales. The actual delay through the first black box (exactly 1 ns) can be seen in the figure below.

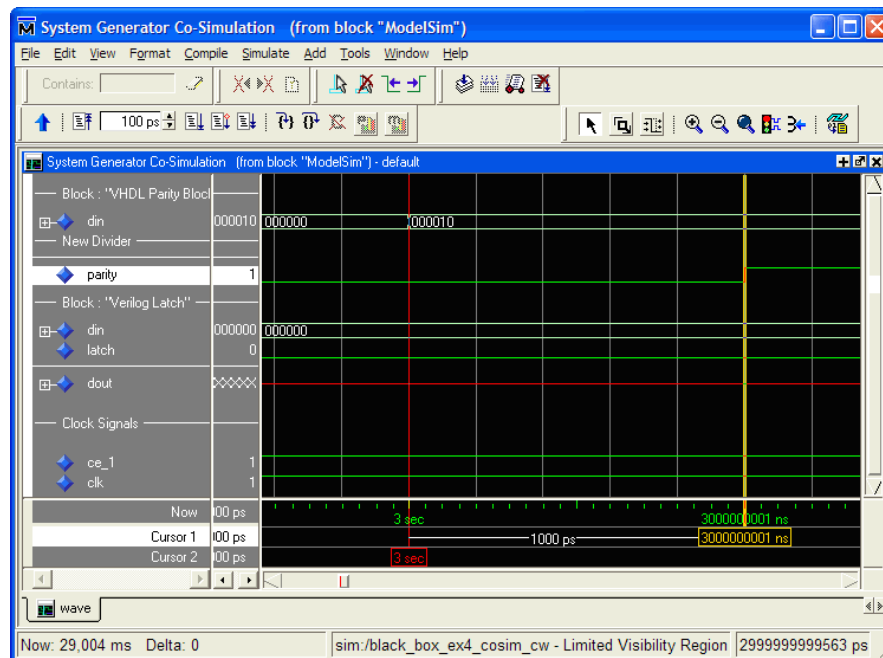

In propagating data through black box components, System Generator allocates 1 / 1000 of the system clock period down to 1us, then shrinks the allocation to 1/100 of the system clock period down to 5ns, and below that threshold resorts to delta-delay stepping, i.e. issuing "run 0 ns" commands to ModelSim. If the HDL includes timing information (e.g., transport delays) and the Simulink System Period is set too low, then the simulation results will be incorrect. The above model begins to fail when the Simulink system period setting is reduced below 5e-7, which is the point at which System Generator resorts to delta-delay stepping of the black boxes for data propagation.

Mult

This block is listed in the following Xilinx Blockset libraries: *Math and Index*.



The Xilinx Mult block implements a multiplier. It computes the product of the data on its two input ports, producing the result on its output port.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Latency:** This defines the number of sample periods by which the block's output is delayed.

Saturation and Rounding of User Data Types in a Multiplier

When saturation or rounding is selected on the user data type of a multiplier, latency is also distributed so as to pipeline the saturation/rounding logic first and then additional registers are added to the core. For example, if a latency of three is selected and rounding/saturation is selected, then the first register will be placed after the rounding or saturation logic and two registers will be placed to pipeline the core. Registers will be added to the core till optimum pipelining is reached and then further registers will be placed after the rounding/saturation logic. However, if the data type you select does not require additional saturation/rounding logic, then all the registers will be used to pipeline the core.

Implementation tab

Parameters specific to the Implementation tab are as follows:

Use behavioral HDL (otherwise use core): The block is implemented using behavioral HDL. This gives the downstream logic synthesis tool maximum freedom to optimize for performance or area.

Core Parameters

- **Use embedded multipliers:** when checked, directs the core to use embedded multipliers (available for parallel multipliers in VirtexTM-II, Virtex-4, Virtex-5, SpartanTM-3 and Spartan-3A DSP only).
- **Test for optimum pipelining:** Checks if the Latency provided is at least equal to the optimum pipeline length. Latency values that pass this test imply that the core produced would be optimized for speed of operation.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The Multiplier block uses the following Xilinx LogiCORE™ Multiplier Generator except when Implement from behavioral HDL description (otherwise use core) is checked:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Mult	Multiplier	V10.1	•	•	•	•	•	•	•	•

Multiple Subsystem Generator

This block is listed in the following Xilinx Blockset libraries: Shared Memory and Index.



The Xilinx Multiple Subsystem Generator block wires two or more System Generator designs into a single top-level HDL component that incorporates multiple clock domains. This top-level component includes the logic associated with each System Generator design and additional logic to allow the designs to communicate with one another.

In software, this communication is handled using shared memory and shared memory derivative blocks (e.g., Shared Memory, To/From FIFO, and To/From Register blocks). In hardware, the designs are interfaced to hardware implementations (e.g., dual-port memory, asynchronous FIFOs, and registers) of their shared memory counterparts, making it possible to partition and implement systems with multiple clock domains.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the Multiple Subsystem Generator icon in your Simulink model.

Parameters specific to the Multiple Subsystem Generator block are:

- **Part:** Defines the FPGA part to be used.
- **Target Directory:** Defines where System Generator should write compilation results. Because System Generator and the FPGA physical design tools typically create many files, it is best to specify a separate target directory, i.e., a directory other than the directory containing your Simulink model files.
- **Synthesis Tool:** Specifies the tool to be used to synthesize the design. Tool choices are Synplify's Synplify Pro or Synplify, and Xilinx's XST.
- **Hardware Description Language:** Tells the type of HDL language (Verilog or VHDL) that should be generated for each design.

Design Generation

The Multiple Subsystem Generator block performs the following steps when you press the **Generate** button in the block's parameters dialog box:


1. It determines the System Generator designs that should be generated and wired together.
2. It configures each System Generator design with appropriate settings and generates the designs individually.
3. It produces hardware implementations (e.g., core netlists) for the shared memory blocks.
4. It generates a top-level HDL file that includes the System Generator designs wired together with the corresponding shared memory hardware implementations.

The Multiple Subsystem Generator block determines which subsystems to implement and wire together by searching for subsystems that contain System Generator blocks that reside at the same level of hierarchy as the Multiple Subsystem Generator block. Inclusion of the Multiple Subsystem Generator block in a Simulink design is restricted in the following ways:

- System Generator blocks may not be included in the same level of hierarchy as the Multiple Subsystem Generator block.

- There must be at least two master System Generator Blocks in subsystems located in the same level of hierarchy as the Multiple Subsystem Generator block.
- Only one Multiple Subsystem Generator block may be included in a given level of hierarchy.

For example, consider the example block diagram shown below. This diagram comprises two subsystems, and it is assumed that each subsystem contains a System Generator block along with some amount of System Generator logic. Note that although only two subsystems are shown in the diagram, the Multiple Subsystem Generator block can accommodate any number of subsystems. A Multiple Subsystem Generator block is included in the same level of hierarchy as the two subsystems. When a user chooses to generate the overall design using the Multiple Subsystem Generator block, the subsystems are generated and then wired together.

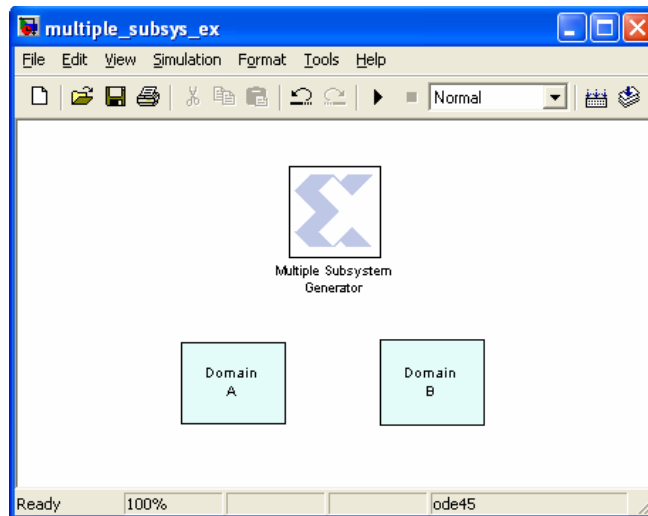

A subsystem that includes a master System Generator block is implemented using the NGC compilation target when the **Generate** button is pressed on the Multiple Subsystem Generator block. Using the NGC compilation target has the advantage of allowing the resulting HDL netlist, cores, and constraints to be delivered as a single netlist file. The HDL component that stitches the designs together instantiates the System Generator designs as black boxes; the NGC files provide the black box implementations. For the example shown above, three separate NGC files would be generated – one corresponding to each subsystem.

Before a design is generated, it is configured with the Part, Synthesis Tool, and Hardware Description Language parameters specified in the Multiple Subsystem Generator dialog box. These settings override the settings of the master System Generator blocks. Note that the original System Generator block settings are restored once generation is complete.


Subsystems that are wired together using the Multiple Subsystem Generator block can communicate with one another using a pair of Shared Memory blocks, To/From FIFO blocks, or To/From Register blocks. The block pairs must be partitioned so that one block resides in one subsystem (e.g., To FIFO block) while the other partner half resides in a different subsystem (e.g., From FIFO block).

When the complete design is translated into hardware, the two FIFO halves are pulled out of their respective subsystems. The System Generator logic that was previously attached to shared memory ports (e.g., data in, data out) are then wired to new top-level ports for that design. This means that one subsystem HDL component includes ports for one half of the shared memory, while the other half has ports for the other shared memory side. A

hardware implementation of the shared memory is then created and wired to the top-level shared memory ports.

Note: The Multiple Subsystem Generator block does not currently support multiple shared memory blocks referencing the same shared memory object in the same subsystem. For example, a To FIFO block cannot be used to communicate to two From FIFO blocks placed in other subsystems.

Consider an example with two subsystems, A and B, where subsystem A contains a To FIFO block and subsystem B contains a From FIFO block. The opposing halves of the FIFO specify the same shared memory name, `my_fifo`. When the design is netlisted using the Multiple Subsystem Generator block, the To FIFO and From FIFO blocks are removed from their respective subsystems, and merged into a single core implementation (e.g., Asynchronous FIFO Core). This process is shown in the figure below.

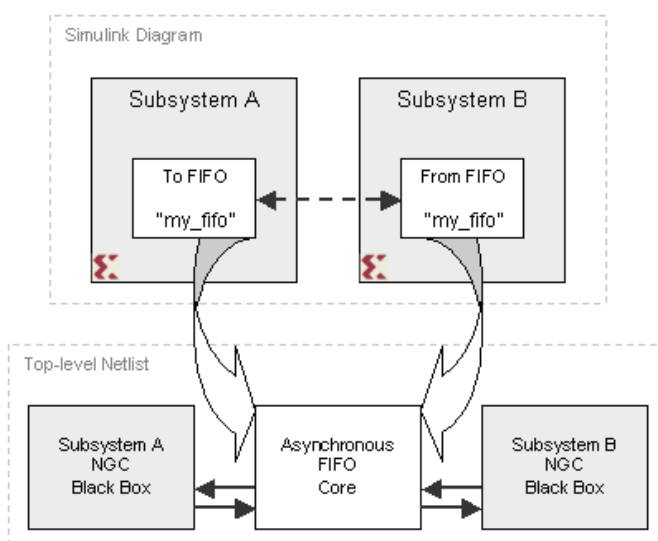

The table below provides the core or HDL component implementation that is used to implement shared memory and shared memory derivative blocks.

To Block	From Block	Hardware Implementation
Shared Memory	Shared Memory	Dual Port Block Memory 6.1
To FIFO	To FIFO	Fifo Generator 2.1
To Register	To Register	<code>synth_reg_w_init.vhd,v</code>

Note: Shared memory blocks should be used as the only means of communication between the subsystems. Do not use explicit System Generator signals to communicate between subsystems, as these are ultimately translated into top-level ports on the top-level HDL component that is created by the Multiple Subsystem Generator block.

All gateway ports included in the System Generator designs considered by the Multiple Subsystem Generator block are included in the top-level HDL component port interface. In addition, individual clock and clock enable ports are included in the port interface for each System Generator subsystem. The clock and clock enable port names are differentiated by the design name, which prefixes the port names. For example, assume the subsystem named `Domain A` has one input port named `inport_a` and one output port named `outport_a`. Also assume the subsystem named `Domain B` has one input port named `inport_b` and one output port named `outport_b`. The VHDL port interface for the resulting top-level entity is provided below:

```

entity multiple_subsys_ex is
port (
    domain_a_ce: in std_logic := '1';
    domain_a_clk: in std_logic;
    domain_b_ce: in std_logic := '1';
    domain_b_clk: in std_logic;
    inport_a: in std_logic_vector(17 downto 0);
    inport_b: in std_logic_vector(17 downto 0);
    outport_a: out std_logic_vector(17 downto 0);
    outport_b: out std_logic_vector(17 downto 0)
);
end multiple_subsys_ex;

```

Multiple Clock Support

Because each subsystem considered by the Multiple Subsystem Generator block has a master System Generator block, it is possible to specify different clocking information (e.g., Simulink system period, FPGA clock period) in each block. By specifying different Simulink system periods, each System Generator design can run at a different rate during simulation, allowing you to effectively model systems that utilize asynchronous clock domains.

The Multiple Subsystem Generator creates a separate clock port for each subsystem that was generated. The clock ports are then routed to the corresponding clock port on the System Generator design. When a design that uses multiple clocks is netlisted (i.e., translated from a high-level model into a lower level HDL description) the two shared memory halves are moved from their respective subsystems into the upper level of hierarchy. The two halves of the shared memory pair are then replaced with a single HDL component that implements the clock domain bridge (e.g., a dual-port memory). Clocks from the two domains are then connected to the opposing sides of the bridge component, along with the necessary data and control signals.

Files Generated


The Multiple Subsystem Generator produces several low level files when the **Generate** button is pushed. These files are written to the target directory specified on the Multiple Subsystem Generator block dialog box. The key files produced by this block are defined in the following table:

File Name Type	Description
<design>.vhd (or .v)	Top-level HDL component that contains the System Generator designs stitched together.
.edn files	Besides writing HDL, the Multiple Subsystem Generator runs CORE Generator™ to implement shared memory hardware implementations. Coregen writes EDIF files whose names typically look something like multiplier_virtex2_6_0_83438798287b830b.edn.
globals	This file consists of key/value pairs that describe the design. The file is organized as a Perl hash table so that the keys and values can be made available to Perl scripts using Perl evals.

File Name Type	Description
<design>.xcf (or .ncf)	This contains timing and port location constraints. These are used by the Xilinx synthesis tool XST and the Xilinx implementation tools. If the synthesis tool is set to something other than XST, then the suffix is changed to .ncf.
hdlFiles	This tells full list of HDL files written by the Multiple Subsystem Generator block. The files are listed in the usual HDL dependency order.
<design>.npl	This allows the HDL and EDIF to be brought into the Xilinx project management tool Project Navigator.

Mux

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, and Index.



The Xilinx Mux block implements a multiplexer. The block has one select input (type unsigned) and a user-configurable number of data bus inputs, ranging from 2 to 1024.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Negate

This block is listed in the following Xilinx Blockset libraries: Math and Index.




The Xilinx Negate block computes the arithmetic negation (two's complement) of its input. The block can be implemented either as a Xilinx LogiCORE™ or as a synthesizable VHDL module.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Network-based Ethernet Co-Simulation



The Xilinx Network-based Ethernet Co-Simulation block provides an interface to perform hardware co-simulation through an Ethernet connection over the IPv4 network infrastructure.

Refer to [Network-Based Ethernet Hardware Co-Simulation](#) for further details about the interface, its prerequisites and setup procedures.

The port interface of the co-simulation block varies. When a model is implemented for network-based Ethernet hardware co-simulation, a new library is created that contains a custom network-based Ethernet co-simulation block with ports that match the gateway names (or port names if the subsystem is not the top level) from the original model. The co-simulation block interacts with the FPGA hardware platform during a Simulink simulation. Simulation data that is written to the input ports of the block are passed to the hardware by the block. Conversely, when data is read from the co-simulation block's output ports, the block reads the appropriate values from the hardware and drives them on the output ports so they can be interpreted in Simulink. In addition, the block automatically opens, configures, steps, and closes the platform.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Clock source:** You may select between Single stepped and Free running clock sources. Selecting a Single stepped clock allows the block to step the board one clock cycle at a time. Each clock cycle step corresponds to some duration of time in Simulink. Using this clock source ensures the behavior of the co-simulation hardware during simulation will be bit and cycle accurate when compared to the simulation behavior of the subsystem from which it originated. Sometimes single stepping is not necessary and the board can be run with a Free Running clock. In this case, the board will operate asynchronously to the Simulink simulation.
- **Has Combination Path:** Sometimes it is necessary to have a direct combinational feedback path from an output port on a hardware co-simulation block to an input port on the same block (e.g., a wire connecting an output port to an input port on a given block). If you require a direct feedback path from an output to input port, and your design does not include a combinational path from any input port to any output port, un-checking this box will allow the feedback path in the design.
- **Bitstream filename:** Specifies the co-simulation FPGA configuration file for the network-based Ethernet hardware co-simulation platform. When a new co-simulation block is created during compilation, this parameter is automatically set so that it points to the appropriate configuration file. You need only adjust this parameter if the location of the configuration file changes.

Network tab

Parameters specific to the Network tab are as follows:

- **FPGA IP address:** Specify the IPv4 address associated with the target FPGA platform. The IP address must be specified using IPv4 dotted decimal notation (e.g. 192.168.8.1). For details on configuring the IP address, refer to the topic [Installing Your Hardware Co-Simulation Board](#).
- **Timeout:** Specifies the timeout value, in milliseconds, for packet retransmission in case of packet loss during the configuration and co-simulation process. The default value should suffice in the general case, but be advised that a larger value may be needed if the network connection is slow, with high latency, or congested.
- **Number of retries:** Specifies the number of retries for packet retransmission in case of packet loss during the configuration and co-simulation process. The default value should suffice in the general case, but be advised that a larger value may be needed if the network connection experiences a considerably amount of packet loss.

See Also

[Ethernet Hardware Co-Simulation](#)

[Network-Based Ethernet Hardware Co-Simulation](#)


Opmode

This block is listed in the following Xilinx Blockset libraries: DSP and Index.



The Xilinx Opmode block generates a constant that is a DSP48 or DSP48E instruction. The instruction is an 11-bit value for the DSP48 or an 15-bit value for the DSP48E. The instruction consists of the opmode, carry-in, carry-in select and either the subtract or alumode bits (depending upon the selection of DSP48 or DSP48E).

The Opmode block is useful for generating DSP48 or DSP48E control sequences. The figure below shows an example. The example implements a 35x35-bit multiplier using a sequence of four instructions in a DSP48 block. The opmode blocks supply the desired instructions to a multiplexer that selects each instruction in the desired sequence.

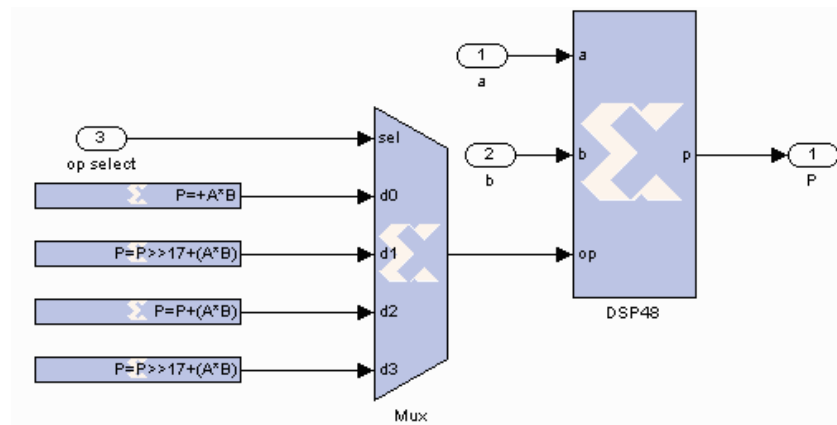

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Opmode tab

Parameters specific to the Opmode tab are as follows:

- **Device:** specifies whether to generate an instruction for the DSP48 or DSP48E device.
- **Operation:** displays the instruction that is generated by the block (instruction is also displayed on the block).
- **Instruction:** allows the selection of a DSP48 or DSP48E instruction. Selecting custom reveals mask parameters that allow the formation of an instruction in the form $z\_mux \pm (yx\_mux + \text{carry})$.
- **Z Mux:** specifies the 'Z' source to the DSP48(E)'s adder to be one of {'0', 'C', 'PCIN', 'P', 'C', 'PCIN>>17', 'P>>17'}.
- **Operand:** specifies whether the DSP48's adder is to perform addition or subtraction. In the DSP48E, the operand selection is made in the instruction pulldown.
- **YX Muxes:** specifies the 'YX' source to the DSP48's adder to be one of {'0', 'P', 'A:B', 'A*B', 'C', 'P+C', 'A:B+C'}. 'A:B' implies that A is concatenated with B to produce a value to be used as an input to the adder.
- **Carry Input:** specifies the 'carry' source to the DSP48's adder to be one of {'0', '1', 'CIN', '~SIGN(P or PCIN)', '~SIGN(A:B or A*B)', '~SIGND(A:B or A*B)', '~SIGN (P or

PCIN)' implies that the carry source is either P or PCIN depending on the Z Mux setting. '~SIGN(A*B or A:B)' implies that the carry source is either A*B or A:B depending on the YX Mux setting. The option '~SIGND (A*B or A:B)' selects a delayed version of '~SIGN(A*B or A:B)'. Appendix: DSP48 Control Instruction Format

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The Opmode block does not use a Xilinx LogiCORE™.

DSP48 Control Instruction Format

Instruction Field Name	Location	Mnemonic	Description
YX Mux	op[3:0]	0	0
		P	DSP48 output register
		A:B	Concat inputs A and B (A is MSB)
		A*B	Multiplication of inputs A and B
		C	DSP48 input C
		P+C	DSP48 input C plus P
		A:B+C	Concat inputs A and B plus C register
Z Mux	op[6:4]	0	0
		PCIN	DSP48 cascaded input from PCOUT
		P	DSP48 output register
		C	DSP48 C input
		PCIN>>17	Cascaded input downshifted by 17
		P>>17	DSP48 output register downshifted by 17
Operand	op[7]	+	Add
		-	Subtract
Carry In	op[8]	0 or 1	Set carry in to 0 or 1
		CIN	Select cin as source
		'~SIGN(P or PCIN)	Symmetric round P or PCIN
		'~SIGN(A:B or A*B)	Symmetric round A:B or A*B
		'~SIGND(A:B or A*B)	Delayed symmetric round of A:B or A*B

DSP48E Control Instruction Format

Instruction Field Name	Location	Mnemonic	Description
YX Mux	op[3:0]	0	0
		P	DSP48 output register
		A:B	Concat inputs A and B (A is MSB)
		A*B	Multiplication of inputs A and B
		C	DSP48 input C
		P+C	DSP48 input C plus P
		A:B+C	Concat inputs A and B plus C register
Z Mux	op[6:4]	0	0
		PCIN	DSP48 cascaded input from PCOUT
		P	DSP48 output register
		C	DSP48 C input
		PCIN>>17	Cascaded input downshifted by 17
		P>>17	DSP48 output register downshifted by 17
Alumode	op[10:7]	X+Z	Add
		Z-X	Subtract
Carry InSelect op[14:12]		0 or 1	Set carry in to 0 or 1
		CIN	Select cin as source. This adds a CIN port to the Opmode block whose value is inserted into the mnemonic at bit location 11.

Parallel to Serial


This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Data Types, and Index.*



Parallel to Serial

The Parallel to Serial block takes an input word and splits it into N time-multiplexed output words where N is the ratio of number of input bits to output bits. The order of the output can be either least significant bit first or most significant bit first.

The following waveform illustrates the block's behavior:

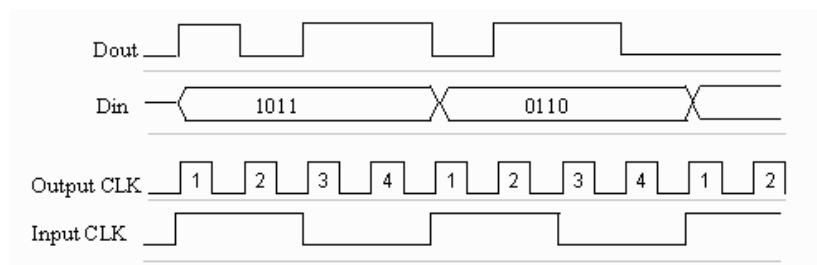

This example illustrates the case where the input width is 4, output word size is 1, and the block is configured to output the most significant word first.

Block Interface

The Parallel to Serial block has one input and one output port. The input port can be any size. The output port size is indicated on the block parameters dialog box.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Output order:** Most significant word first or least significant word first.
- **Type:** signed or unsigned.
- **Number of bits:** Output width. Must divide Number of Input Bits evenly.
- **Binary Point:** Binary point location.

The minimum latency of this block is 0.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Pause Simulation

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The Xilinx Pause Simulation block pauses the simulation when the input is non-zero. The block accepts any Xilinx signal type as input.


When the simulation is paused, it can be restarted by selecting the **Start** button on the model toolbar: 

Block Parameters


There are no parameters for this block.

PicoBlaze Instruction Display

This block is listed in the following Xilinx Blockset libraries: *Tools and Index*.



The PicoBlaze Instruction Display block takes an encoded 18 bit PicoBlaze instruction and a 10 bit address and displays the decoded instruction and the program counter on the block icon. This feature is useful when debugging PicoBlaze designs and can be used in conjunction with the [Single-Step Simulation](#) block to step through each instruction.

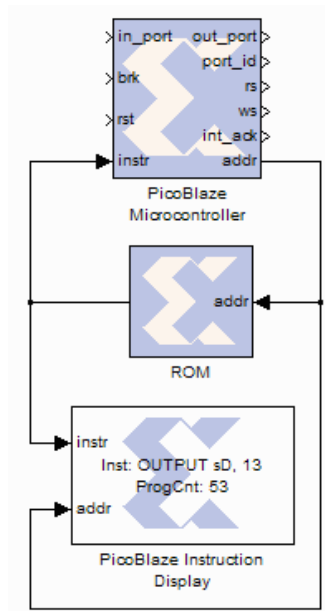

Block Interface

The PicoBlaze Instruction Display block has two input ports. The instr port accepts an 18 bit encoded instruction. The addr port accepts a 10 bit address value which is the program counter.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:


- **Version:** PicoBlaze 2 or PicoBlaze 3.
- **Disable Display:** When selected, the display is no longer updated which will speed up your simulation when not in debug mode.

Xilinx LogiCORE

The PicoBlaze Instruction Display block does not use a Xilinx LogiCORE™.

PicoBlaze Microcontroller

This block is listed in the following Xilinx Blockset libraries: Control Logic and Index.




The Xilinx PicoBlaze Microcontroller block implements an embedded 8-bit microcontroller using the PicoBlaze macro.

The block provides access to two versions of PicoBlaze™. PicoBlaze 2 supports Virtex™-II and PicoBlaze 3 supports Virtex-II, Virtex-IIPro, Spartan™-3, and Virtex-4. The PicoBlaze 2 macro provides 49 instructions, 32 8-bit general-purpose registers, 256 directly and indirectly addressable ports, and a maskable interrupt. By comparison, the PicoBlaze 3 provides 53 instructions, 16 8-bit general-purpose registers, 256 directly and indirectly addressable ports, and a maskable interrupt, as well as 64 bytes of internal scratch pad memory accessible using the STORE and FETCH instructions. The PicoBlaze 2 embedded controller and its instruction set are described in detail in the Xilinx Application Note XAPP627, which can be found at:

<http://www.xilinx.com/bvdocs/appnotes/xapp627.pdf>.

Ordinarily, a single block ROM containing 1024 or fewer 8 bit words serves as the program store. The microcontroller and ROM are connected as shown below.



Block Interface

Both versions of the block have four input ports. The 8-bit data port, `in_port`, is read during an INPUT operation. The value can be transferred into any of the 32 registers. The program can be interrupted by setting the port `brk` to 1. The processor can be reset by setting `rst` to 1. This clears registers and forces the processor to begin executing instructions at address 0. The 8-bit input port `instr` accepts PicoBlaze instructions.

The PicoBlaze 2 block has five output ports. The PicoBlaze 3 block has six output ports. The 8-bit output port `out_port` is written during an OUTPUT instruction. During a read/write, the `port_id` output identifies the location from which a value is read/written. The output ports `rs` (read strobe) and `ws` (write strobe) indicate whether a read (INPUT) or write (OUTPUT) operation is occurring. `addr` is the address of the next instruction to be executed by the processor. The processor has no internal program store. The output port `addr` specifies the next location from which an instruction should be executed. The `ack` port (PicoBlaze 3 only) indicates when the interrupt service routine is started (i.e. the program counter is set to 0x3FF).

Block Parameters

Parameters specific to the PicoBlaze Microcontroller block are:

- **Version:** PicoBlaze 2 or PicoBlaze 3.
- **Display Internal State:** When checked, the registers and control flags are made available in the MATLAB workspace. The information is present as a structure with the following naming convention:

< design name >_< subsystem name >_< PicoBlaze block name >.

The structure contains a field for each register (i.e. s00,s01, etc.) and the control flags CARRY and ZERO.

- **Display Values As:** Tells the radix to use for displaying values.

Other parameters used by this block are explained in the topic

[Common Options in Block Parameters Dialog Boxes](#).

How to Use the PicoBlaze Assembler

1. Write a PicoBlaze program. Save the program with a .psm file extension.
2. Run the assembler from the MATLAB command prompt. The command is:

```
xlpb_as -p <your_psm_file>.
```

The default is to assemble a program for PicoBlaze 3. To assemble a program for PicoBlaze 2 use the -v 2 option. This script runs the PicoBlaze assembler and generates a M-code program which should be used to populate the ROM or RAM used as the program store.

Known Issues


- The PicoBlaze assembler xlpb_as fails when the assembly code file is found in a directory whose full path name contains more than 58 characters.
- Verilog netlisting is not supported for this block.

PicoBlaze Microprocessor Online Documentation

More information can be found at

http://www.xilinx.com/products/design_resources/proc_central/index.htm.

Point-to-point Ethernet Co-Simulation



The Xilinx Point-to-point Ethernet Co-Simulation block provides an interface to perform hardware co-simulation through a raw Ethernet connection.

Refer to the topic [Ethernet Hardware Co-Simulation](#) for further details about the interface, its prerequisites and setup procedures.

A new Point-to-point Ethernet co-simulation block is created by selecting "Point-to-point Ethernet Cosim" as the compilation target in a System Generator block. The resulting block will have ports corresponding to the original gateways (or subsystem ports). The generated block can then be used just like any other Sysgen block. The co-simulation block interacts with the FPGA hardware platform during a Simulink simulation. Simulation data written to the input ports of the block passes to the hardware via the block. Conversely, when data is read from the co-simulation block's output ports, the block reads the appropriate values from the hardware and drives them on the output ports so they can be interpreted in Simulink. In addition, the block automatically opens, configures, steps, and closes the platform.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Clock source:** You may select between Single stepped and Free running clock sources. Selecting a Single stepped clock allows the block to step the board one clock cycle at a time. Each clock cycle step corresponds to some duration of time in Simulink. Using this clock source ensures the behavior of the co-simulation hardware during simulation will be bit and cycle accurate when compared to the simulation behavior of the subsystem from which it originated. Sometimes single stepping is not necessary and the board can be run with a Free Running clock. In this case, the board will operate asynchronously to the Simulink simulation.
- **Has Combination Path:** Sometimes it is necessary to have a direct combinational feedback path from an output port on a hardware co-simulation block to an input port on the same block (e.g., a wire connecting an output port to an input port on a given block). If you require a direct feedback path from an output to input port, and your design does not include a combinational path from any input port to any output port, un-checking this box will allow the feedback path in the design.
- **Bitstream filename:** Specifies the co-simulation FPGA configuration file for the Point-to-point Ethernet hardware co-simulation platform. When a new co-simulation block is created during compilation, this parameter is automatically set so that it points to the appropriate configuration file. You need only adjust this parameter if the location of the configuration file changes.

Ethernet tab

Parameters specific to the Ethernet tab are as follows:

- **Host interface:** Specifies the host network interface card that is used to establish a connection to the target FPGA platform for co-simulation. The pop-down list shows

all active network interface cards that can be used for point-to-point Ethernet co-simulation. The information panel displays the MAC address, link speed, maximum frame size of the chosen interface, and its corresponding connection name in the Windows environment. The list of available interfaces and the information panel may not reflect the up-to-date status, and in such case, they can be updated by clicking **Refresh** button.

- **FPGA interface MAC address:** Specify the Ethernet MAC address associated with the target FPGA platform. The MAC address must be specified using six pairs of two-digit hexadecimal number separated by colons (e.g. 00:0a:35:11:22:33). For JTAG-based configuration, the MAC address can be arbitrarily assigned to each FPGA platform provided there is no conflicting address in the Ethernet LAN. For configuration over the point-to-point Ethernet connection, refer to Configuration using System ACE™ for details on configuring the MAC address of the FPGA platform.

Configuration tab

- **Download cable:** You may select between Parallel Cable IV and Platform USB programming cables for JTAG-based device configuration, or alternatively, select Point-to-point Ethernet to perform device configuration over the Ethernet connection. For details on setup procedures, refer to the topic [Installing Your Hardware Co-Simulation Board](#).
- **Cable speed:** For JTAG-based configuration only. Sometimes you may need to run the programming cable at a frequency less than the default (maximum) speed setting for hardware co-simulation. This menu allows you to choose a cable speed that is suitable for your hardware setup. Normally the default speed will suffice, however, it is recommended to try a slower cable speed if System Generator fails to configure the device for co-simulation.
- **Configuration timeout:** Specifies the timeout value, in milliseconds, for the configuration process. The default value should suffice in the general case, but be advised that a larger value may be needed if it takes a considerable amount of time to re-establish the connection after device configuration.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


See Also

[Ethernet Hardware Co-Simulation](#)

[Point-to-Point Ethernet Hardware Co-Simulation Configuration Using System ACE](#)

Puncture


This block is listed in the following Xilinx Blockset libraries: *Communication and Index*.



The Xilinx Puncture block removes a set of user-specified bits from the input words of its data stream.

Based on the puncture code parameter, a binary vector that specifies which bits to remove, it converts input data of type $U\text{FixN}_0$ (where N is equal to the length of the puncture code) into output data of type $U\text{FixK}_0$ (where K is equal to the number of ones in the puncture code). The output rate is identical to the input rate.

This block is commonly used in conjunction with a convolutional encoder to implement punctured convolutional codes as shown in the figure below.

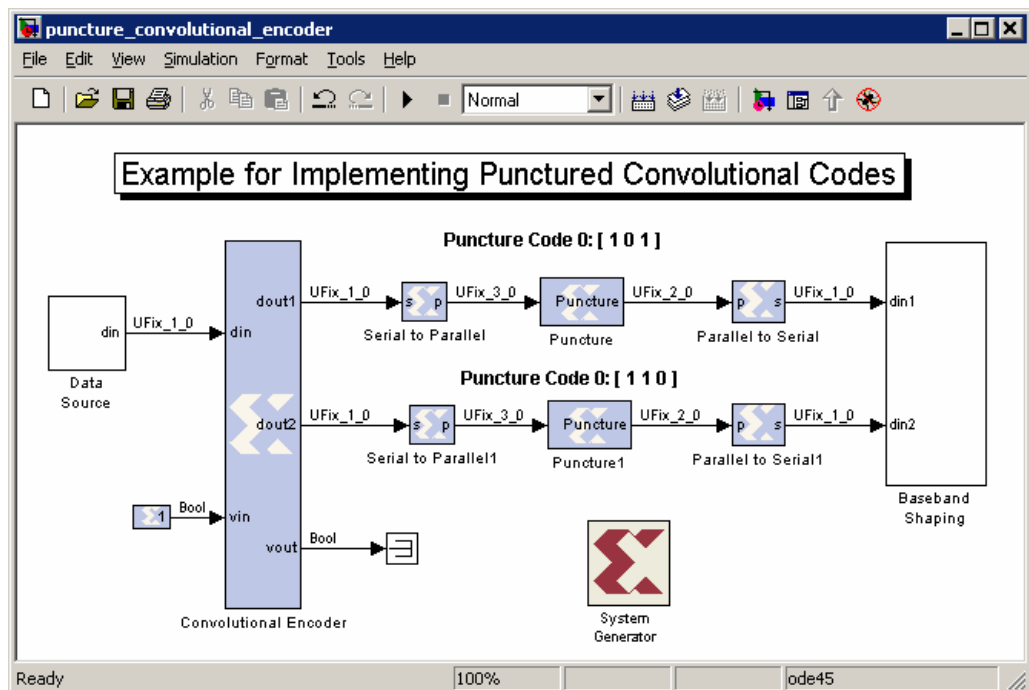

The system shown implements a rate $\frac{1}{2}$ convolutional encoder whose outputs are punctured to produce four output bits for each three input bits. The top puncture block removes the center bit for code 0 ([1 0 1]) and bottom puncture block removes the least significant bit for code 1 ([1 1 0]), producing a 2-bit punctured output. These data streams are serialized into 1-bit in-phase and quadrature data streams for baseband shaping.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to the block are as follows:

- Puncture Code:** the puncture pattern represented as a bit vector, where a zero in position i indicates bit i is to be removed.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Reed-Solomon Decoder 6.1

This block is listed in the following Xilinx Blockset libraries: *Communication and Index*.



Reed-Solomon Decoder 6.1

The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.

They are used to correct errors in many systems such as digital storage devices, wireless/ mobile communications, and digital video broadcasting.

The Reed-Solomon decoder processes blocks generated by a Reed-Solomon encoder, attempting to correct errors and recover information symbols. The number and type of errors that can be corrected depend on the characteristics of the code.

This block supports Spartan™-3A DSP as well as the following previously-supported technologies: Virtex™-II, Virtex-II Pro, Virtex-4, Virtex-5, Spartan-3, Spartan-3A/3AN, and Spartan-3E.

Reed-Solomon codes are Bose-Chaudhuri-Hocquenghem (BCH) codes, which in turn are linear block codes. An (n,k) linear block code is a k -dimensional sub-space of an n -dimensional vector space over a finite field. Elements of the field are called *symbols*. For a Reed-Solomon code, n ordinarily is $2^s - 1$, where s is the width in bits of each symbol. When the code is *shortened*, n is smaller. The decoder handles both full length and shortened codes. It is also able to handle *erasures*, that is, symbols that are known with high probability to contain errors.

When the decoder processes a block, there are three possibilities:

1. The information symbols are recovered. This is the case provided $2p+r < n-k$, where p is the number of errors and r is the number of erasures.
2. The decoder reports it is unable to recover the information symbols.
3. The decoder fails to recover the information symbols but does not report an error.

The probability of each possibility depends on the code and the nature of the communications channel. Simulink provides excellent tools for modeling channels and estimating these probabilities.

Block Interface

The Xilinx RS Decoder block has inputs `data_in`, `sync` and `reset` and outputs `data_out`, `blk_strt`, `blk_end`, `err_found`, `err_cnt`, `fail`, `ready` and `rfd`. It also has optional inputs `n_in`, `erase`, `rst`, and `en`, and optional output ports `erase_cnt` and `data_del`.

The following describes these ports in detail:

- **data_in:** presents blocks of n symbols to be decoded. The `din` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **sync:** tells the decoder when to begin processing symbols from `data_in`. The decoder discards input symbols until the first time `sync` is asserted. The symbol on which `sync` is asserted marks the beginning of the first n symbol block to be processed by the decoder. The `sync` signal is ignored till the decoder is ready to accept another code block. The signal driving `sync` must be `Bool`.
- **reset:** asynchronously resets the decoder. The signal driving `reset` must be `Bool`.

Note: reset must be asserted high for at least 1 sample period before the decoder can start decoding code symbols.

- **erase:** indicates the symbol currently presented on `din` should be treated as an erasure. The signal driving `erase` must be `Bool`.
- **n_in:** `n_in` is sampled at the start of each block. The new block's length, `n_block`, is set to `n_in` sampled. The `n_in` signal must have type `UFIX_s_0`, where `s` is the width in bits of each symbol.
- **rst:** synchronously resets the decoder. This port is added to the block when you specify **Provide synchronous reset port**. The signal driving `rst` must be `Bool`.
- **en:** carries the enable signal for the decoder. The signal driving `en` must be `Bool`.
- **data_out:** produces the information and parity symbols resulting from decoding. The type of `data_out` is the same as that for `data_in`.
- **blk_strt:** presents a 1 at the time `data_out` presents the first symbol of the block. `blk_strt` produces a signal of `UFIX_1_0` type.
- **blk_end:** presents a 0 at the time `data_out` presents the last symbol of the block. `blk_end` produces a signal of `UFIX_1_0` type.
- **err_found:** presents a value at the time `data_out` presents the last symbol of the block. The value 1 if the decoder detected any errors or erasures during decoding. `err_found` must have type `UFIX_1_0`.
- **err_cnt:** presents a value at the time `data_out` presents the last symbol of the block. The value is the number of errors that were corrected. `err_cnt` must have type `UFIX_b_0` where `b` is the number of bits needed to represent `n-k`.
- **fail:** presents a value at the time `dout` presents the last symbol of the block. The value is 1 if the decoder was unable to recover the information symbols, and 0 otherwise. `fail` must have type `UFIX_1_0`.
- **ready:** value is 1 when the decoder is ready to sample `data_in` input, and 0 otherwise. `ready` must have type `UFIX_1_0`.
- **rffd:** value is 1 when the decoder is ready to sample the first symbol of a code block on `data_in` input, and 0 otherwise. `rffd` must have type `UFIX_1_0`.
- **data_del:** produces the un-decoded symbols alongside the decoded symbols on `data_out`. The type of `data_del` is the same as that for `data_in`.
- **erase_cnt:** only available when erasure decoding is enabled. Presents a value at the time `dout` presents the last symbol of the block. The value is the number of erasures that were corrected. `erase_cnt` must have type `UFIX_b_0` where `b` is the number of bits needed to represent `n`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Code specification:** specifies the type of RS Decoder desired. The choices are:
 - ♦ **Custom:** allows you to set all the block parameters.
 - ♦ **ATSC:** implements ATSC (Advanced Television Systems Committee) standard (207, 187) shortened RS code.

- ♦ **CCSDS:** implements CCSDS (Consultative Committee for Space Data Systems) standard (255, 223) full length RS code.
 - ♦ **DVB:** implements DVB (Digital Video Broadcasting) standard (204, 188) shortened RS code.
 - ♦ **IESS-308 (126):** implements IESS-308 (INTELSAT Earth Station Standard) specification (126, 112) shortened RS code.
 - ♦ **IESS-308 (194):** implements IESS-308 specification (194, 178) shortened RS code.
 - ♦ **IESS-308 (208):** implements IESS-308 specification (208, 192) shortened RS code.
 - ♦ **IESS-308 (219):** implements IESS-308 specification (219, 201) shortened RS code.
 - ♦ **IESS-308 (225):** implements IESS-308 specification (225, 205) shortened RS code.
 - ♦ **IEEE-802.16d:** implements IEEE-802.16d specification (255, 239) full length RS code.
- **Number of channels:** tells the number of separate time division multiplexed channels to be processed by the encoder. The encoder supports up to 128 channels.
 - **Clocks per symbol:** tells the number of sample periods to use per input data symbol. This may be increased to reduce the processing delay and support continuous decoding of code words. The input data should be held for the number of clock symbols specified.
 - **Provide erase port:** when checked, the block is given a `erase` input.
 - **Provide variable block length port (n_in):** when checked, the block is given a `n_in` input.
 - **Provide original delayed data port (data_del):** when checked, the block is given a `data_del` output.
 - **Symbol width:** tells the width in bits for symbols in the code. The encoder support widths from 3 to 12.
 - **Number of symbols per code block(n):** tells the number of symbols in the blocks the encoder produces. Acceptable numbers range from 3 to $2^s - 1$, where s denotes the symbol width.
 - **Number of information symbols per code block(k):** tells the number of information symbols each block contains. Acceptable values range from $\max(n - 256, 1)$ to $n - 2$.
 - **Field polynomial:** specifies the polynomial from which the symbol field is derived. It must be specified as a decimal number. This polynomial must be primitive. A value of zero indicates the default polynomial should be used. Default polynomials are listed in the table below.

Symbol Width	Default Polynomials	Array Representation
3	$x^3 + x + 1$	11
4	$x^4 + x + 1$	19
5	$x^5 + x^2 + 1$	37
6	$x^6 + x + 1$	67
7	$x^7 + x^3 + 1$	137
8	$x^8 + x^4 + x^3 + x^2 + 1$	285
9	$x^9 + x^4 + 1$	529
10	$x^{10} + x^3 + 1$	1033

Symbol Width	Default Polynomials	Array Representation
11	$x^{11} + x^2 + 1$	2053
12	$x^{12} + x^6 + x^4 + x + 1$	4179

- **Generator start:** specifies the first root r of the generator polynomial. The generator polynomial $g(x)$, is given by:

$$g(x) = \prod_{i=0}^{n-k-1} (x - \alpha^{h(r+j)})$$

where α is a primitive element of the symbol field, and the scaling factor is described below.

- **Scaling factor for generator polynomial:** (represented in the previous formula as h) specifies the scaling factor for the code. Ordinarily, h is 1, but can be as large as $2^S - 1$ where s is the symbol width. The value must be chosen so that α^h is primitive. That is, h must be relatively prime to $2^S - 1$.
- **Memory type:** allows to select between distributed, block and automatic memory choices.
- **Optimisation:** allows to select between area and speed optimization.
- **Self recovering state machine:** when checked, the block synchronously resets itself if it enters an illegal state.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following Xilinx LogiCORE™ RS Decoder:


System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Reed-Solomon Decoder 6.1	Reed-Solomon Decoder v6.1	V6.0		•	•	•		•	•	•

This is a licensed core, available for purchase on the Xilinx web site at:

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=DO-DI-RSD.

Reed-Solomon Encoder 6.1

This block is listed in the following Xilinx Blockset libraries: *Communications and Index*.



Reed-Solomon Encoder 6.1


The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.

They are used to correct errors in many systems such as digital storage devices, wireless or mobile communications, and digital video broadcasting.

The Reed-Solomon encoder augments data blocks with redundant symbols so that errors introduced during transmission can be corrected. Errors may occur for a number of reasons (noise or interference, scratches on a CD, etc.). The Reed-Solomon decoder attempts to correct errors and recover the original data. The number and type of errors that can be corrected depends on the characteristics of the code.


This block supports Spartan-3A DSP as well as the following previously-supported technologies: Virtex™-II, Virtex-II Pro, Virtex-4, Virtex-5, Spartan™-3, Spartan-3A/3AN, and Spartan-3E.

A typical system is shown below:



Reed-Solomon codes are Bose-Chaudhuri-Hocquenghem (BCH) codes, which in turn are linear block codes. An (n, k) linear block code is a k -dimensional sub space of an n -dimensional vector space over a finite field. Elements of the field are called symbols. For a Reed-Solomon code, n ordinarily is $2^s - 1$, where s is the width in bits of each symbol. When the code is shortened, n is smaller. The encoder handles both full length and shortened codes.

The encoder is systematic. This means it constructs code blocks of length n from information blocks of length k by adjoining $n-k$ parity symbols.



A Reed-Solomon code is characterized by its field and generator polynomials. The field polynomial is used to construct the symbol field, and the generator polynomial is used to calculate parity symbols. The encoder allows both polynomials to be configured. The generator polynomial has the form:

$$g(x) = (x - \alpha^j)(x - \alpha^{j+1}) \dots (x - \alpha^{j+n-k-1})$$

where α is a primitive element of the finite field having $n + 1$ elements.

Block Interface

The Xilinx Reed-Solomon Encoder block has inputs `data_in`, `bypass`, and `start`, and outputs `data_out` and `info`. It also has optional inputs `n_in`, `r_in`, `nd`, `rst` and `en`. It also has optional outputs `rdy`, `rfd`, and `rffd`.

The following describes the ports in detail:

- **data_in**: presents blocks of symbols to be encoded. Each block consists of k information symbols followed by $n - k$ un-interpreted filler symbols. The `din` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **start**: tells the encoder when to begin processing symbols from `din`. The encoder discards input symbols until the first time `start` is asserted. The symbol on which `start` is asserted marks the beginning of the first n symbol blocks to be processed by the encoder. If `start` is asserted for more than one sample period, the value at the last period is taken as the beginning of the block. The `start` signal is ignored if `bypass` is asserted simultaneously. The signal driving `start` must be `Bool`.
- **bypass**: when `bypass` is asserted, the value on `din` is passed unchanged to `dout` with a delay of 4 (6 in the case of CCSDS) sample periods. The `bypass` signal has no effect on the state of the encoder. The signal driving `bypass` must be `Bool`.
- **n_in**: `n_in` is sampled at the start of each block. The new block's length, `n_block`, is set to `n_in` sampled. The `n_in` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **r_in**: `r_in` is sampled at the start of each block. The new block's length, `r_block`, is set to `r_in` sampled. The `r_in` signal must have type `UFIX_p_0`, where p is the number of bits required to represent the parity bits ($n-k$) in the default code word.
- **nd**: marks each `data_in` symbol as part of the information symbols for processing parity symbols. The signal driving `nd` must be `Bool`.
- **rst**: carries the reset signal. The signal driving `rst` must be `Bool`.
- **en**: carries the enable signal. The signal driving `en` must be `Bool`.
- **data_out**: produces blocks of n symbols that represent the results of encoding blocks of k information symbols read from `data_in`. The type of `data_out` is the same as that for `data_in`.
- **info**: equals 1 (respectively, 0) when the value presented on `data_out` is an information (respectively, parity) symbol. `info` must have type `UFIX_1_0`.
- **rdy**: marks each symbol produced on `data_out` as valid or invalid. `rdy` must have type `UFIX_1_0`.
- **rfd**: equals 1 when the encoder is accepting and producing information symbols, and is 0 when producing parity symbols. `rfd` must have type `UFIX_1_0`.
- **rffd**: equals 1 when the encoder is ready to accept a new `start` pulse. `rffd` must have type `UFIX_1_0`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:

- **Code specification**: specifies the encoder type. The choices are:
 - ♦ **Custom**: allows you to set all the block parameters.

- ♦ **ATSC**: implements ATSC (Advanced Television Systems Committee) standard (207, 187) shortened RS code.
- ♦ **CCSDS**: implements CCSDS (Consultative Committee for Space Data Systems) standard (255, 223) full length RS code.
- ♦ **DVB**: implements DVB (Digital Video Broadcasting) standard (204, 188) shortened RS code.
- ♦ **IESS-308 (126)**: implements IESS-308 (INTELSAT Earth Station Standard) specification (126, 112) shortened RS code.
- ♦ **IESS-308 (194)**: implements IESS-308 specification (194, 178) shortened RS code.
- ♦ **IESS-308 (208)**: implements IESS-308 specification (208, 192) shortened RS code.
- ♦ **IESS-308 (219)**: implements IESS-308 specification (219, 201) shortened RS code.
- ♦ **IESS-308 (225)**: implements IESS-308 specification (225, 205) shortened RS code.
- ♦ **ITU-J.83 Annex B**: implements ITU-J.83 Annex B specification (128, 122) extended RS code.
- **Number of channels**: tells the number of separate time division multiplexed channels to be processed by the encoder. The encoder supports up to 128 channels.
- **Provide variable number of check symbols (r_in)**: when checked, the block is given a r_in and n_in input.
- **Provide variable block length port (n_in)**: when checked, the block is given a n_in input.
- **Provide new data port (nd)**: when checked, the block is given a nd input.
- **Provide ready port (rdy)**: when checked, the block is given a rdy output.
- **Provide ready for data port (rfd)**: when checked, the block is given a rfd output.
- **Provide ready for first data port (rffd)**: when checked, the block is given a rffd output.
- **Symbol width**: tells the width in bits for symbols in the code. The encoder support widths from 3 to 12.
- **n (number of symbols per code block)**: tells the number of symbols in the blocks the encoder produces. Acceptable numbers range from 3 to $2^s - 1$, where s denotes the symbol width.
- **k (number of information symbols per code block)**: tells the number of information symbols each block contains. Acceptable values range from $\max(n - 256, 1)$ to $n - 2$.
- **Field polynomial**: specifies the polynomial from which the symbol field is derived. It must be specified as a decimal number. This polynomial must be primitive. A value of zero indicates the default polynomial should be used. Default polynomials are listed in the table below.

Symbol Width	Default Polynomials	Array Representation
3	$x^3 + x + 1$	11
4	$x^4 + x + 1$	19
5	$x^5 + x^2 + 1$	37
6	$x^6 + x + 1$	67
7	$x^7 + x^3 + 1$	137
8	$x^8 + x^4 + x^3 + x^2 + 1$	285

Symbol Width	Default Polynomials	Array Representation
9	$x^9 + x^4 + 1$	529
10	$x^{10} + x^3 + 1$	1033
11	$x^{11} + x^2 + 1$	2053
12	$x^{12} + x^6 + x^4 + x + 1$	4179

- **Generator start:** specifies the first root r of the generator polynomial. The generator polynomial $g(x)$ is given by:

$$g(x) = \prod_{i=0}^{n-k-1} (x - \alpha^{h(r+j)})$$

- where α is a primitive element of the symbol field, and the scaling factor h is described below.
- **Scaling factor for generator polynomial:** specifies the scaling factor for the code. Ordinarily the scaling factor is 1, but can be as large as $2^S - 1$ where s is the symbol width. The value must be chosen so that α^h is primitive, i.e., the value must be relatively prime to $2^S - 1$.
- **Memory style:** allows you to select between distributed, block and automatic memory choices. This option is available only for CCSDS codes.
- **Check symbol generator:** allows you to select between optimized for area or flexibility. This option is available when variable number of check symbols are presented at the encoder input.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following Xilinx LogiCORE™ RS Encoder:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Reed-Solomon Encoder 6.1	Reed-Solomon Encoder v6.1	V6.0		•	•	•		•	•	•

This is a licensed core, available for purchase on the Xilinx web site at:

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=DO-DI-RSE.

Register

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Memory, and Index.



The Xilinx Register block models a D flip flop-based register, having latency of one sample period.

Block Interface

The block has one input port for the data and an optional input reset port. The initial output value is specified by you in the block parameters dialog box (below). Data presented at the input will appear at the output after one sample period. Upon reset, the register assumes the initial value specified in the parameters dialog box.

The Register block differs from the Xilinx Delay block by providing an optional reset port and a user specifiable initial value.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Initial value:** specifies the initial value in the register.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The Register block is implemented as a synthesizable VHDL module. It does not use a Xilinx LogiCORE™.

Reinterpret

This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Math, and Index.*



The Xilinx Reinterpret block forces its output to a new type without any regard for retaining the numerical value represented by the input.

The binary representation is passed through unchanged, so in hardware this block consumes no resources. The number of bits in the output will always be the same as the number of bits in the input.

The block allows for unsigned data to be reinterpreted as signed data, or, conversely, for signed data to be reinterpreted as unsigned. It also allows for the reinterpretation of the data's scaling, through the repositioning of the binary point within the data. The Xilinx Scale block provides an analogous capability.

An example of this block's use is as follows: if the input type is 6 bits wide and signed, with 2 fractional bits and the output type is forced to be unsigned with 0 fractional bits, then an input of -2.0 (1110.00 in binary, two's complement) would be translated into an output of 56 (111000 in binary).

This block can be particularly useful in applications that combine it with the Xilinx Slice block or the Xilinx Concat block. To illustrate the block's use, consider the following scenario:

Given two signals, one carrying signed data and the other carrying two unsigned bits (a `UFix_2_0`), we want to design a system that concatenates the two bits from the second signal onto the tail (least significant bits) of the signed signal.

We can do so using two Reinterpret blocks and one Concat block. The first Reinterpret block is used to force the signed input signal to be treated as an unsigned value with its binary point at zero. The result is then fed through the Concat block along with the other signal's `UFix_2_0`. The Concat operation is then followed by a second Reinterpret that forces the output of the Concat block back into a signed interpretation with the binary point appropriately repositioned.

Though three blocks are required in this construction, the hardware implementation will be realized as simply a bus concatenation, which has no cost in hardware.

Block Parameters


Parameters specific to the block are:

- **Force arithmetic type:** When checked, the Output Arithmetic Type parameter can be set and the output type will be forced to the arithmetic type chosen according to the setting of the Output Arithmetic Type parameter. When unchecked, the arithmetic type of the output will be unchanged from the arithmetic type of the input.
- **Output arithmetic type:** The arithmetic type (unsigned or signed, 2's complement) to which the output is to be forced.
- **Force binary point:** When checked, the Output Binary Point parameter can be set and the binary point position of the output will be forced to the position supplied in the Output Binary Point parameter. When unchecked, the arithmetic type of the output will be unchanged from the arithmetic type of the input.
- **Output binary point:** The position to which the output's binary point is to be forced. The supplied value must be an integer between zero and the number of bits in the input (inclusive).

This block does not use any hardware resources.

Relational

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Math, and Index.



The Xilinx Relational block implements a comparator.

The supported comparisons are the following:

- equal-to ($a = b$)
- not-equal-to ($a \neq b$)
- less-than ($a < b$)
- greater-than ($a > b$)
- less-than-or-equal-to ($a \leq b$)
- greater-than-or-equal-to ($a \geq b$)
- The output of the block is a `Bool`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The only parameter specific to the Relational block is:

- **Comparison:** specifies the comparison operation computed by the block.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The Relational block does not use a Xilinx LogiCORE™.

Reset Generator

This block is listed in the following Xilinx Blockset libraries: *Basic Elements* and *Index*.




Reset Generator

The Reset Generator block captures the user's reset signal that is running at the system sample rate, and produces one or more downsampled reset signal(s) running at the rates specified on the block.

The downsampled reset signals are synchronized in the same way as they are during startup. The RDY output signal indicates when the downsampled resets are no longer asserted after the input reset is detected.

Block Parameters

The block parameters dialog box shown below can be invoked by double-clicking the icon in your Simulink model.

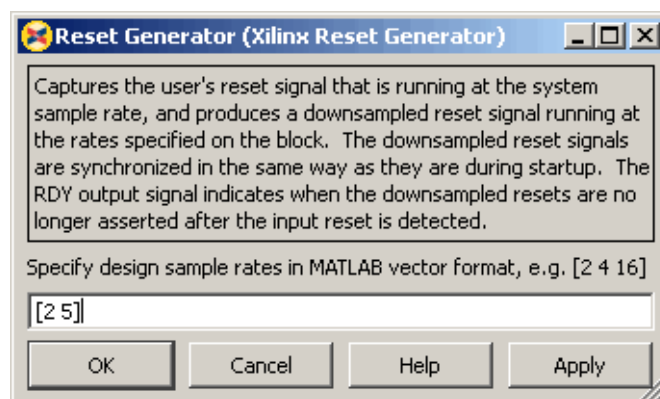

You specify the design sample rates in MATLAB vector format as shown above. Any number of outputs can be specified.

Resource Estimator

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The Xilinx Resource Estimator block provides fast estimates of FPGA resources required to implement a System Generator subsystem or model.

These estimates are computed by invoking block-specific estimators for Xilinx blocks, and summing these values to obtain aggregated estimates of lookup tables (LUTs), flip-flops (FFs), block memories (BRAM), 18x18 multipliers, tristate buffers, and I/Os.

Every Xilinx block that requires FPGA resources has a mask parameter that stores a vector containing its resource requirements. The Resource Estimator block can invoke underlying functions to populate these vectors (e.g. after parameters or data types have been changed), or aggregate previously computed values that have been stored in the vectors. Each block has a checkbox control `Define FPGA area for resource estimation` that short-circuits invocation of the estimator function and uses the estimates stored in the vector instead.

An estimator block can be placed in any subsystem of a model. When another estimator block is situated in the sub-hierarchy below an estimator, the blocks interact as described below.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters in the Resource Estimator dialog box are:

- **Slices:** Slices utilized by the block. (A slice normally consists of two flip-flops, two LUTs and associated mux, carry and control logic.)
- **FFs:** Flip Flops utilized by the block.
- **BRAMs:** Block RAMs utilized by the block.
- **LUTs:** Look-up Tables utilized by the block.
- **IOBs:** Input/Output blocks consumed by the block.
- **Embedded Mults:** Embedded multipliers utilized by the block. (For example, the VirtexTM-II device contains embedded 18X18 multipliers.)
- **TBUFs:** Tristate Buffers utilized by the block.
- **Use Area Above:** When this box is checked, any resource estimation performed on this subsystem will return the numbers entered in the edit boxes of the dialog box (The data represented by these fields is equivalent to the FPGA Area field in the individual System Generator blocks). Any blocks at the level of the subsystem where this block resides, or below, will have no automatic resource estimation performed when this box is checked.
- **Estimate Options:** Allows selection of estimation method as one of the following: Estimate, Quick, Post Map and Read Mrp. These options are explained in greater detail in the next topic.
- **Estimate:** Launches resource estimation

Perform Resource Estimation Buttons

The FPGA Area fields described above can either be manually entered or filled in by launching resource estimation with Estimate Options set to one of the following:

- **Estimate:** Invokes block estimation functions top-down for each block and subsystem recursively. Blocks that do not have an estimation function but can be implemented in hardware (except shared memory blocks) are automatically estimated using post-map area. If any block has the Define FPGA area for resource estimation option selected, its estimation function is short-circuited and its current estimate is used. If Use area above option is selected for a Resource Estimator block, this block's estimate will be used for the entire subsystem containing it, and no other block estimation functions will be invoked for that portion of the model hierarchy.
- **Quick:** Causes the **Estimate** button to sum all of the FPGA Area fields on the blocks and subsystems at or below the current subsystem. No underlying estimation functions are invoked.
- **Post-Map Area:** Causes the **Estimate** button to automatically invoke Xilinx map tool on the entire subsystem and read back the results from the created Map Report File (MRP). In order to use this option a System Generator block along with the resource estimator block must be instantiated in the subsystem being estimated.
- **Read MRP:** Causes the **Estimate** button to open a file browser. The results from a selected MRP file are read into the Resource Estimator. This method of obtaining resource information is available for subsystems that have been previously synthesized, translated and mapped. This can be useful for complex Xilinx blocks that have no estimation function and will no longer change in a design.

The numbers from the map report file and those inserted into the Resource Estimator dialog box area fields may be slightly different (this applies to Post Map Area option also). Any IOB FF resources found in the MRP file will be added into the estimators FFs field. Along the same lines, half of the MRP's IOB FF resources will be added into the estimators Slices field and the estimators IOBs field will always be set to 0 after performing a Post-Map Area MRP or Read MRP. Since the usefulness of this feature generally occurs in estimating subsystems, IOB resources must be included in the CLB utilization numbers to prevent incorrectly reporting IOB resources not used in the final design.

Blocks Supported by Resource Estimation

Blocks that have Fast Resource Estimation Functions:

Accumulator, Addressable Shift Register, AddSub, CMult (sequential version not supported), Convert, Counter, Delay, Down Sample, Dual Port RAM, FIFO, FFT, FFTx, Gateway In, Gateway Out, Inverter, LFSR, Logical, Mult (sequential version not supported), Mux (tristate version not supported), Negate, Parallel to Serial, PicoBlaze Processor, Register, Relational, ROM, Serial To Parallel, Shift, Sine Cosine, Single Port RAM, Threshold, Up Sample.

Blocks that Use Post Map Area Estimates:

System generator blocks that do not have fast resource estimation functions and use hardware are estimated using post-map area. In order to avoid using this method enter in a constant or a user-created estimation function into the FPGA Area field of the block and click on the **Define FPGA area for resource estimation** checkbox.

Blocks that Do Not Use Any Hardware:

System Generator, Clear Quantization Error, Clock Enable Probe, Clock Probe, Concat, Constant, Discard Subsystem, FDATA Tool, Indeterminate Probe, ModelSim, Pause Simulation, PicoBlaze Instruction Display, Quantization Error, Reinterpret, Sample Time, Scale, Simulation Multiplexer, Single-Step Simulation, Slice, BitBasher.

Blocks with Special Handling:

Discard Subsystem (Resource Estimator will ignore any resources in a subsystem containing this block). Shared memory blocks are not estimated. In designs containing Shared Memory blocks, use the Multiple System Generator block to generate the HDL netlist files. Use ISE™ software to create the Map Report File for the design and use the Read MRP option to obtain the results contained in the MRP file produced.


Known Issues for Resource Estimation

Resource estimation in System Generator has the following known issues:

- Estimations are based upon the data types for the inputs and outputs of each block that Simulink calculates during the compilation phase. If significant trimming takes place in a design that is not seen at the block level, the resource estimation tool will overestimate those trimmed resources.
- Any logic that the synthesis tools can combine across blocks will be overestimated. For example, when using blocks that have no latency, there is a good chance combinational logic will be optimized across block boundaries.
- Multirate designs contain clock enable generation logic that is underestimated. System Generator handles multirate designs by using one clock and generating a different clock enable for each rate. In order to accurately predict the amount of logic in the clock enable drivers, the estimator would need to look at the system as a whole instead of at the block level. Note, this underestimation will also include resources associated with additional clock enable connections that will be made to each of the blocks that were not visible to the block estimation functions.
- Shared Memory Blocks are not estimated. In designs containing Shared Memory blocks, the estimates reported do not include the resources used by the Shared Memory blocks.

ROM

This block is listed in the following Xilinx Blockset libraries: Control Logic, Memory, and Index.



The Xilinx ROM block is a single port read-only memory (ROM).

Values are stored by word and all words have the same arithmetic type, width, and binary point position. Each word is associated with exactly one address. An address can be any unsigned fixed-point integer from 0 to $d-1$, where d denotes the ROM depth (number of words). The memory contents are specified through a block parameter. The block has one input port for the memory address and one output port for data out. The address port must be an unsigned fixed-point integer. The block has two possible Xilinx LogiCORE™ implementations, using either distributed or block memory.

When implementing single port ROM blocks on Virtex™-4, Virtex-5 and Spartan™-3A DSP devices, maximum timing performance is possible if the following conditions are satisfied:

- The option **Provide reset port for output register** is un-checked
- The option **Depth** is less than 16,384
- The option **Latency** is set to 2 or higher

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Depth:** specifies the number of words stored; must be a positive integer.
- **Initial value vector:** specifies the initial value. When the vector is longer than the ROM depth, the vector's trailing elements are discarded. When the ROM is deeper than the vector length, the ROM's trailing words are set to zero. The initial value vector is saturated or rounded according to the data precision specified for the ROM.
- **Memory Type:** specifies block implementation to be distributed RAM or Block RAM.
- **Provide reset port for output register:** when selected, allows access to the reset port available on the output register of the Block ROM. The reset port is available only when the latency of the Block ROM is set to 1.
- **Initial value for output register:** specifies the initial value for output register. The initial value is saturated and rounded according to the data precision specified for the ROM. The option to set initial value is available only for Virtex™-II, Virtex-II Pro, Spartan™-3, Virtex-4, Virtex-5, and Spartan-3A DSP devices.

Output Type

Parameters specific to the Output Type tab are as follows:

- **Word type:** specifies the data to be Signed or Unsigned.
- **Number of bits:** specifies the number of bits in a memory word.
- **Binary point:** specifies the location of the binary point in the memory word.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The block always uses a Xilinx LogiCORE™: Single Port Block Memory or Distributed Memory.

For the block memory, the address width must be equal to $\text{ceil}(\log_2(d))$ where d denotes the memory depth. The maximum width of data words in the block memory depends on the depth specified; the maximum depth is depends on the device family targeted. The tables below provide the maximum data word width for a given block memory depth.

Maximum Width for Various Depth Ranges (Virtex™/Virtex-E/Spartan™-3)

Depth	Width
2 to 2048	256
2049 to 4096	192
4097 to 8192	96
8193 to 16K	48
16K+1 to 32K	24
32K+1 to 64K	12
64K+1 to 128K	6
128K+1 to 256K	3

Width for Various Depth Ranges (Virtex-II/Virtex-II Pro/Virtex-4/Virtex-5/Spartan-3A DSP)

Depth	Width
2 to 8192	256
8193 to 16K	192
16K+1 to 32K	96
32K+1 to 64K	48
64K+1 to 128K	24
128K+1 to 256K	12
256K+1 to 512K	6
512K+1 to 1024K	3


When the distributed memory parameter is selected, LogiCORE Distributed Memory is used. The depth must be between 16 and 65536, inclusive for Virtex-II, Virtex-II Pro, Spartan-3, and Virtex-4, Virtex-5, and Spartan-3A DSP ; depth must be between 16 to 4096, inclusive for the other FPGA families. The word width must be between 1 and 1024, inclusive.

This block uses the following Xilinx LogiCORE™s:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
	Single Port Block Memory	V6.1	•	•			•	•	•	
	Block Memory Generator	V2.4			•	•				•
	Distributed Memory	V7.1	•	•			•	•	•	
	Distributed Memory	V7.1	•	•			•	•	•	

RS Decoder v5_1

This block is listed in the following Xilinx Blockset libraries: *Communication and Index*.

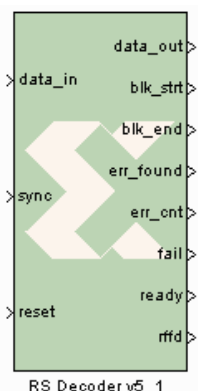

The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.

They are used to correct errors in many systems such as digital storage devices, wireless/ mobile communications, and digital video broadcasting.

The Reed-Solomon decoder processes blocks generated by a Reed-Solomon encoder, attempting to correct errors and recover information symbols. The number and type of errors that can be corrected depend on the characteristics of the code.

Reed-Solomon codes are Bose-Chaudhuri-Hocquenghem (BCH) codes, which in turn are linear block codes. An (n,k) linear block code is a k -dimensional sub-space of an n -dimensional vector space over a finite field. Elements of the field are called *symbols*. For a Reed-Solomon code, n ordinarily is $2^s - 1$, where s is the width in bits of each symbol. When the code is *shortened*, n is smaller. The decoder handles both full length and shortened codes. It is also able to handle *erasures*, that is, symbols that are known with high probability to contain errors.

When the decoder processes a block, there are three possibilities:

1. The information symbols are recovered. This is the case provided $2p+r < n-k$, where p is the number of errors and r is the number of erasures.
2. The decoder reports it is unable to recover the information symbols.
3. The decoder fails to recover the information symbols but does not report an error.

The probability of each possibility depends on the code and the nature of the communications channel. Simulink provides excellent tools for modeling channels and estimating these probabilities.

Block Interface

The Xilinx RS Decoder block has inputs `data_in`, `sync` and `reset` and outputs `data_out`, `blk_strt`, `blk_end`, `err_found`, `err_cnt`, `fail`, `ready` and `rfd`. It also has optional inputs `n_in`, `erase`, `rst`, and `en`, and optional output ports `erase_cnt` and `data_del`.

The following describes these ports in detail:

- **data_in:** presents blocks of n symbols to be decoded. The `din` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **sync:** tells the decoder when to begin processing symbols from `data_in`. The decoder discards input symbols until the first time `sync` is asserted. The symbol on which `sync` is asserted marks the beginning of the first n symbol block to be processed by the decoder. The `sync` signal is ignored till the decoder is ready to accept another code block. The signal driving `sync` must be `Bool`.
- **reset:** asynchronously resets the decoder. The signal driving `reset` must be `Bool`.

Note: `reset` must be asserted high for at least 1 sample period before the decoder can start decoding code symbols.

- **erase:** indicates the symbol currently presented on `din` should be treated as an erasure. The signal driving `erase` must be `Bool`.
- **n_in:** `n_in` is sampled at the start of each block. The new block's length, `n_block`, is set to `n_in` sampled. The `n_in` signal must have type `UFIX_s_0`, where `s` is the width in bits of each symbol.
- **rst:** synchronously resets the decoder. This port is added to the block when you specify **Provide synchronous reset port**. The signal driving `rst` must be `Bool`.
- **en:** carries the enable signal for the decoder. The signal driving `en` must be `Bool`.
- **data_out:** produces the information and parity symbols resulting from decoding. The type of `data_out` is the same as that for `data_in`.
- **blk_strt:** presents a 1 at the time `data_out` presents the first symbol of the block. `blk_strt` produces a signal of `UFIX_1_0` type.
- **blk_end:** presents a 0 at the time `data_out` presents the last symbol of the block. `blk_end` produces a signal of `UFIX_1_0` type.
- **err_found:** presents a value at the time `data_out` presents the last symbol of the block. The value is 1 if the decoder detected any errors or erasures during decoding. `err_found` must have type `UFIX_1_0`.
- **err_cnt:** presents a value at the time `data_out` presents the last symbol of the block. The value is the number of errors that were corrected. `err_cnt` must have type `UFIX_b_0` where `b` is the number of bits needed to represent `n-k`.
- **fail:** presents a value at the time `dout` presents the last symbol of the block. The value is 1 if the decoder was unable to recover the information symbols, and 0 otherwise. `fail` must have type `UFIX_1_0`.
- **ready:** value is 1 when the decoder is ready to sample `data_in` input, and 0 otherwise. `ready` must have type `UFIX_1_0`.
- **rffd:** value is 1 when the decoder is ready to sample the first symbol of a code block on `data_in` input, and 0 otherwise. `rffd` must have type `UFIX_1_0`.
- **data_del:** produces the un-decoded symbols alongside the decoded symbols on `data_out`. The type of `data_del` is the same as that for `data_in`.
- **erase_cnt:** only available when erasure decoding is enabled. Presents a value at the time `dout` presents the last symbol of the block. The value is the number of erasures that were corrected. `erase_cnt` must have type `UFIX_b_0` where `b` is the number of bits needed to represent `n`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Code specification:** specifies the type of RS Decoder desired. The choices are:
 - ♦ **Custom:** allows you to set all the block parameters.
 - ♦ **ATSC:** implements ATSC (Advanced Television Systems Committee) standard (207, 187) shortened RS code.
 - ♦ **CCSDS:** implements CCSDS (Consultative Committee for Space Data Systems) standard (255, 223) full length RS code.

- ◆ **DVB:** implements DVB (Digital Video Broadcasting) standard (204, 188) shortened RS code.
- ◆ **IESS-308 (126):** implements IESS-308 (INTELSAT Earth Station Standard) specification (126, 112) shortened RS code.
- ◆ **IESS-308 (194):** implements IESS-308 specification (194, 178) shortened RS code.
- ◆ **IESS-308 (208):** implements IESS-308 specification (208, 192) shortened RS code.
- ◆ **IESS-308 (219):** implements IESS-308 specification (219, 201) shortened RS code.
- ◆ **IESS-308 (225):** implements IESS-308 specification (225, 205) shortened RS code.
- ◆ **IEEE-802.16d:** implements IEEE-802.16d specification (255, 239) full length RS code.
- **Number of channels:** tells the number of separate time division multiplexed channels to be processed by the encoder. The encoder supports up to 128 channels.
- **Clocks per symbol:** tells the number of sample periods to use per input data symbol. This may be increased to reduce the processing delay and support continuous decoding of code words. The input data should be held for the number of clock symbols specified.
- **Provide erase port:** when checked, the block is given a `erase` input.
- **Provide variable block length port (n_in):** when checked, the block is given a `n_in` input.
- **Provide original delayed data port (data_del):** when checked, the block is given a `data_del` output.
- **Symbol width:** tells the width in bits for symbols in the code. The encoder support widths from 3 to 12.
- **Number of symbols per code block(n):** tells the number of symbols in the blocks the encoder produces. Acceptable numbers range from 3 to $2^S - 1$, where s denotes the symbol width.
- **Number of information symbols per code block(k):** tells the number of information symbols each block contains. Acceptable values range from $\max(n - 256, 1)$ to $n - 2$.
- **Field polynomial:** specifies the polynomial from which the symbol field is derived. It must be specified as a binary array whose first (respectively, last) element tells the coefficient of the highest degree (respectively, constant) term. This polynomial must be primitive. A value of zero indicates the default polynomial should be used. Default polynomials are listed in the table below.

Symbol Width	Default Polynomials	Array Representation
3	$x^3 + x + 1$	[1 0 1 1]
4	$x^4 + x + 1$	[1 0 0 1 1]
5	$x^5 + x^2 + 1$	[1 0 0 0 1 1]
6	$x^6 + x + 1$	[1 0 0 0 0 1 1]
7	$x^7 + x^3 + 1$	[1 0 0 0 1 0 0 1]
8	$x^8 + x^4 + x^3 + x^2 + 1$	[1 0 0 0 1 1 1 0 1]
9	$x^9 + x^4 + 1$	[1 0 0 0 0 1 0 0 0 1]
10	$x^{10} + x^3 + 1$	[1 0 0 0 0 0 0 1 0 0 1]

Symbol Width	Default Polynomials	Array Representation
11	$x^{11} + x^2 + 1$	[1 0 0 0 0 0 0 0 0 1 0 1]
12	$x^{12} + x^6 + x^4 + x + 1$	[1 0 0 0 0 0 1 0 1 0 0 1 1]

- **Generator start:** specifies the first root r of the generator polynomial. The generator polynomial $g(x)$, is given by:

$$g(x) = \prod_{i=0}^{n-k-1} (x - \alpha^{h(r+j)})$$

where α is a primitive element of the symbol field, and the scaling factor is described below.

- **Scaling factor for generator polynomial:** (represented in the previous formula as h) specifies the scaling factor for the code. Ordinarily, h is 1, but can be as large as $2^S - 1$ where s is the symbol width. The value must be chosen so that α^h is primitive. That is, h must be relatively prime to $2^S - 1$.
- **Memory type:** allows to select between distributed, block and automatic memory choices.
- **Optimisation:** allows to select between area and speed optimization.
- **Self recovering state machine:** when checked, the block synchronously resets itself if it enters an illegal state.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

The RS Decoder block uses the following Xilinx LogiCORE™ RS Decoder:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
RS Decoder v5_1	RS Decoder	V5.1	•	•			•	•	•	

This is a licensed core, available for purchase on the Xilinx web site at:

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=DO-DI-RSD.

RS Decoder v6_0

This block is listed in the following Xilinx Blockset libraries: *Communication and Index*.



The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.

They are used to correct errors in many systems such as digital storage devices, wireless/ mobile communications, and digital video broadcasting.

The Reed-Solomon decoder processes blocks generated by a Reed-Solomon encoder, attempting to correct errors and recover information symbols. The number and type of errors that can be corrected depend on the characteristics of the code.

Reed-Solomon codes are Bose-Chaudhuri-Hocquenghem (BCH) codes, which in turn are linear block codes. An (n,k) linear block code is a k -dimensional sub-space of an n -dimensional vector space over a finite field. Elements of the field are called *symbols*. For a Reed-Solomon code, n ordinarily is $2^s - 1$, where s is the width in bits of each symbol. When the code is *shortened*, n is smaller. The decoder handles both full length and shortened codes. It is also able to handle *erasures*, that is, symbols that are known with high probability to contain errors.

When the decoder processes a block, there are three possibilities:

1. The information symbols are recovered. This is the case provided $2p+r < n-k$, where p is the number of errors and r is the number of erasures.
2. The decoder reports it is unable to recover the information symbols.
3. The decoder fails to recover the information symbols but does not report an error.

The probability of each possibility depends on the code and the nature of the communications channel. Simulink provides excellent tools for modeling channels and estimating these probabilities.

Block Interface

The Xilinx RS Decoder block has inputs `data_in`, `sync` and `reset` and outputs `data_out`, `blk_strt`, `blk_end`, `err_found`, `err_cnt`, `fail`, `ready` and `rfd`. It also has optional inputs `n_in`, `erase`, `rst`, and `en`, and optional output ports `erase_cnt` and `data_del`.

The following describes these ports in detail:

- **data_in:** presents blocks of n symbols to be decoded. The `din` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **sync:** tells the decoder when to begin processing symbols from `data_in`. The decoder discards input symbols until the first time `sync` is asserted. The symbol on which `sync` is asserted marks the beginning of the first n symbol block to be processed by the decoder. The `sync` signal is ignored till the decoder is ready to accept another code block. The signal driving `sync` must be `Bool`.
- **reset:** asynchronously resets the decoder. The signal driving `reset` must be `Bool`.

Note: `reset` must be asserted high for at least 1 sample period before the decoder can start decoding code symbols.

- **erase:** indicates the symbol currently presented on `din` should be treated as an erasure. The signal driving `erase` must be `Bool`.
- **n_in:** `n_in` is sampled at the start of each block. The new block's length, `n_block`, is set to `n_in` sampled. The `n_in` signal must have type `UFIX_s_0`, where `s` is the width in bits of each symbol.
- **rst:** synchronously resets the decoder. This port is added to the block when you specify **Provide synchronous reset port**. The signal driving `rst` must be `Bool`.
- **en:** carries the enable signal for the decoder. The signal driving `en` must be `Bool`.
- **data_out:** produces the information and parity symbols resulting from decoding. The type of `data_out` is the same as that for `data_in`.
- **blk_strt:** presents a 1 at the time `data_out` presents the first symbol of the block. `blk_strt` produces a signal of `UFIX_1_0` type.
- **blk_end:** presents a 0 at the time `data_out` presents the last symbol of the block. `blk_end` produces a signal of `UFIX_1_0` type.
- **err_found:** presents a value at the time `data_out` presents the last symbol of the block. The value 1 if the decoder detected any errors or erasures during decoding. `err_found` must have type `UFIX_1_0`.
- **err_cnt:** presents a value at the time `data_out` presents the last symbol of the block. The value is the number of errors that were corrected. `err_cnt` must have type `UFIX_b_0` where `b` is the number of bits needed to represent `n-k`.
- **fail:** presents a value at the time `dout` presents the last symbol of the block. The value is 1 if the decoder was unable to recover the information symbols, and 0 otherwise. `fail` must have type `UFIX_1_0`.
- **ready:** value is 1 when the decoder is ready to sample `data_in` input, and 0 otherwise. `ready` must have type `UFIX_1_0`.
- **rffd:** value is 1 when the decoder is ready to sample the first symbol of a code block on `data_in` input, and 0 otherwise. `rffd` must have type `UFIX_1_0`.
- **data_del:** produces the un-decoded symbols alongside the decoded symbols on `data_out`. The type of `data_del` is the same as that for `data_in`.
- **erase_cnt:** only available when erasure decoding is enabled. Presents a value at the time `dout` presents the last symbol of the block. The value is the number of erasures that were corrected. `erase_cnt` must have type `UFIX_b_0` where `b` is the number of bits needed to represent `n`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Code specification:** specifies the type of RS Decoder desired. The choices are:
 - ♦ **Custom:** allows you to set all the block parameters.
 - ♦ **ATSC:** implements ATSC (Advanced Television Systems Committee) standard (207, 187) shortened RS code.
 - ♦ **CCSDS:** implements CCSDS (Consultative Committee for Space Data Systems) standard (255, 223) full length RS code.

- ◆ **DVB**: implements DVB (Digital Video Broadcasting) standard (204, 188) shortened RS code.
- ◆ **IESS-308 (126)**: implements IESS-308 (INTELSAT Earth Station Standard) specification (126, 112) shortened RS code.
- ◆ **IESS-308 (194)**: implements IESS-308 specification (194, 178) shortened RS code.
- ◆ **IESS-308 (208)**: implements IESS-308 specification (208, 192) shortened RS code.
- ◆ **IESS-308 (219)**: implements IESS-308 specification (219, 201) shortened RS code.
- ◆ **IESS-308 (225)**: implements IESS-308 specification (225, 205) shortened RS code.
- ◆ **IEEE-802.16d**: implements IEEE-802.16d specification (255, 239) full length RS code.
- **Number of channels**: tells the number of separate time division multiplexed channels to be processed by the encoder. The encoder supports up to 128 channels.
- **Clocks per symbol**: tells the number of sample periods to use per input data symbol. This may be increased to reduce the processing delay and support continuous decoding of code words. The input data should be held for the number of clock symbols specified.
- **Provide erase port**: when checked, the block is given a `erase` input.
- **Provide variable block length port (n_in)**: when checked, the block is given a `n_in` input.
- **Provide original delayed data port (data_del)**: when checked, the block is given a `data_del` output.
- **Symbol width**: tells the width in bits for symbols in the code. The encoder support widths from 3 to 12.
- **Number of symbols per code block(n)**: tells the number of symbols in the blocks the encoder produces. Acceptable numbers range from 3 to $2^S - 1$, where s denotes the symbol width.
- **Number of information symbols per code block(k)**: tells the number of information symbols each block contains. Acceptable values range from $\max(n - 256, 1)$ to $n - 2$.
- **Field polynomial**: specifies the polynomial from which the symbol field is derived. It must be specified as a binary array whose first (respectively, last) element tells the coefficient of the highest degree (respectively, constant) term. This polynomial must be primitive. A value of zero indicates the default polynomial should be used. Default polynomials are listed in the table below.

Symbol Width	Default Polynomials	Array Representation
3	$x^3 + x + 1$	[1 0 1 1]
4	$x^4 + x + 1$	[1 0 0 1 1]
5	$x^5 + x^2 + 1$	[1 0 0 0 1 1]
6	$x^6 + x + 1$	[1 0 0 0 0 1 1]
7	$x^7 + x^3 + 1$	[1 0 0 0 1 0 0 1]
8	$x^8 + x^4 + x^3 + x^2 + 1$	[1 0 0 0 1 1 1 0 1]
9	$x^9 + x^4 + 1$	[1 0 0 0 0 1 0 0 0 1]
10	$x^{10} + x^3 + 1$	[1 0 0 0 0 0 0 1 0 0 1]

Symbol Width	Default Polynomials	Array Representation
11	$x^{11} + x^2 + 1$	[1 0 0 0 0 0 0 0 0 1 0 1]
12	$x^{12} + x^6 + x^4 + x + 1$	[1 0 0 0 0 0 1 0 1 0 0 1 1]

- **Generator start:** specifies the first root r of the generator polynomial. The generator polynomial $g(x)$, is given by:

$$g(x) = \prod_{i=0}^{n-k-1} (x - \alpha^{h(r+j)})$$

where α is a primitive element of the symbol field, and the scaling factor is described below.

- **Scaling factor for generator polynomial:** (represented in the previous formula as h) specifies the scaling factor for the code. Ordinarily, h is 1, but can be as large as $2^S - 1$ where s is the symbol width. The value must be chosen so that α^h is primitive. That is, h must be relatively prime to $2^S - 1$.
- **Memory type:** allows to select between distributed, block and automatic memory choices.
- **Optimisation:** allows to select between area and speed optimization.
- **Self recovering state machine:** when checked, the block synchronously resets itself if it enters an illegal state.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following Xilinx LogiCORE™ RS Decoder:


System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
RS Decoder v6_0	RS Decoder	V6.0		•	•			•	•	•

This is a licensed core, available for purchase on the Xilinx web site at:

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=DO-DI-RSD.

RS Encoder v5_0

This block is listed in the following Xilinx Blockset libraries: *Communications and Index*.




The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.

They are used to correct errors in many systems such as digital storage devices, wireless or mobile communications, and digital video broadcasting.


The Reed-Solomon encoder augments data blocks with redundant symbols so that errors introduced during transmission can be corrected. Errors may occur for a number of reasons (noise or interference, scratches on a CD, etc.). The Reed-Solomon decoder attempts to correct errors and recover the original data. The number and type of errors that can be corrected depends on the characteristics of the code.

A typical system is shown below:



Reed-Solomon codes are Bose-Chaudhuri-Hocquenghem (BCH) codes, which in turn are linear block codes. An (n, k) linear block code is a k -dimensional sub-space of an n -dimensional vector space over a finite field. Elements of the field are called symbols. For a Reed-Solomon code, n ordinarily is $2^S - 1$, where s is the width in bits of each symbol. When the code is shortened, n is smaller. The encoder handles both full length and shortened codes.

The encoder is systematic. This means it constructs code blocks of length n from information blocks of length k by adjoining $n-k$ parity symbols.



A Reed-Solomon code is characterized by its field and generator polynomials. The field polynomial is used to construct the symbol field, and the generator polynomial is used to calculate parity symbols. The encoder allows both polynomials to be configured. The generator polynomial has the form:

$$g(x) = (x - \alpha^j)(x - \alpha^{j+1}) \dots (x - \alpha^{j+n-k-1})$$

where α is a primitive element of the finite field having $n + 1$ elements.

Block Interface

The Xilinx Reed-Solomon Encoder block has inputs `data_in`, `bypass`, and `start`, and outputs `data_out` and `info`. It also has optional inputs `n_in`, `r_in`, `nd`, `rst` and `en`. It also has optional outputs `rdy`, `rfd`, and `rffd`.

The following describes the ports in detail:

- **data_in**: presents blocks of symbols to be encoded. Each block consists of k information symbols followed by $n - k$ un-interpreted filler symbols. The `din` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **start**: tells the encoder when to begin processing symbols from `din`. The encoder discards input symbols until the first time `start` is asserted. The symbol on which `start` is asserted marks the beginning of the first n symbol blocks to be processed by the encoder. If `start` is asserted for more than one sample period, the value at the last period is taken as the beginning of the block. The `start` signal is ignored if `bypass` is asserted simultaneously. The signal driving `start` must be `Bool`.
- **bypass**: when `bypass` is asserted, the value on `din` is passed unchanged to `dout` with a delay of 4 (6 in the case of CCSDS) sample periods. The `bypass` signal has no effect on the state of the encoder. The signal driving `bypass` must be `Bool`.
- **n_in**: `n_in` is sampled at the start of each block. The new block's length, `n_block`, is set to `n_in` sampled. The `n_in` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **r_in**: `r_in` is sampled at the start of each block. The new block's length, `r_block`, is set to `r_in` sampled. The `r_in` signal must have type `UFIX_p_0`, where p is the number of bits required to represent the parity bits ($n-k$) in the default code word.
- **nd**: marks each `data_in` symbol as part of the information symbols for processing parity symbols. The signal driving `nd` must be `Bool`.
- **rst**: carries the reset signal. The signal driving `rst` must be `Bool`.
- **en**: carries the enable signal. The signal driving `en` must be `Bool`.
- **data_out**: produces blocks of n symbols that represent the results of encoding blocks of k information symbols read from `data_in`. The type of `data_out` is the same as that for `data_in`.
- **info**: equals 1 (respectively, 0) when the value presented on `data_out` is an information (respectively, parity) symbol. `info` must have type `UFIX_1_0`.
- **rdy**: marks each symbol produced on `data_out` as valid or invalid. `rdy` must have type `UFIX_1_0`.
- **rfd**: equals 1 when the encoder is accepting and producing information symbols, and is 0 when producing parity symbols. `rfd` must have type `UFIX_1_0`.
- **rffd**: equals 1 when the encoder is ready to accept a new `start` pulse. `rffd` must have type `UFIX_1_0`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:

- **Code specification**: specifies the encoder type. The choices are:
 - ♦ **Custom**: allows you to set all the block parameters.
 - ♦ **ATSC**: implements ATSC (Advanced Television Systems Committee) standard (207, 187) shortened RS code.
 - ♦ **CCSDS**: implements CCSDS (Consultative Committee for Space Data Systems) standard (255, 223) full length RS code.

- ♦ **DVB:** implements DVB (Digital Video Broadcasting) standard (204, 188) shortened RS code.
- ♦ **IESS-308 (126):** implements IESS-308 (INTELSAT Earth Station Standard) specification (126, 112) shortened RS code.
- ♦ **IESS-308 (194):** implements IESS-308 specification (194, 178) shortened RS code.
- ♦ **IESS-308 (208):** implements IESS-308 specification (208, 192) shortened RS code.
- ♦ **IESS-308 (219):** implements IESS-308 specification (219, 201) shortened RS code.
- ♦ **IESS-308 (225):** implements IESS-308 specification (225, 205) shortened RS code.
- ♦ **ITU-J.83 Annex B:** implements ITU-J.83 Annex B specification (128, 122) extended RS code.
- **Number of channels:** tells the number of separate time division multiplexed channels to be processed by the encoder. The encoder supports up to 128 channels.
- **Provide variable number of check symbols (r_in):** when checked, the block is given a r_in and n_in input.
- **Provide variable block length port (n_in):** when checked, the block is given a n_in input.
- **Provide new data port (nd):** when checked, the block is given a nd input.
- **Provide ready port (rdy):** when checked, the block is given a rdy output.
- **Provide ready for data port (rfd):** when checked, the block is given a rfd output.
- **Provide ready for first data port (rffd):** when checked, the block is given a rffd output.
- **Symbol width:** tells the width in bits for symbols in the code. The encoder support widths from 3 to 12.
- **n (number of symbols per code block):** tells the number of symbols in the blocks the encoder produces. Acceptable numbers range from 3 to $2^s - 1$, where s denotes the symbol width.
- **k (number of information symbols per code block):** tells the number of information symbols each block contains. Acceptable values range from $\max(n - 256, 1)$ to $n - 2$.
- **Field polynomial:** specifies the polynomial from which the symbol field is derived. It must be specified as a binary array whose first (resp., last) element tells the coefficient of the highest degree (resp., constant) term. This polynomial must be primitive. A value of zero indicates the default polynomial should be used. Default polynomials are listed in the table below.

Symbol Width	Default Polynomials	Array Representation
3	$x^3 + x + 1$	[1 0 1 1]
4	$x^4 + x + 1$	[1 0 0 1 1]
5	$x^5 + x^2 + 1$	[1 0 0 0 1 1]
6	$x^6 + x + 1$	[1 0 0 0 0 1 1]
7	$x^7 + x^3 + 1$	[1 0 0 0 1 0 0 1]
8	$x^8 + x^4 + x^3 + x^2 + 1$	[1 0 0 0 1 1 1 0 1]
9	$x^9 + x^4 + 1$	[1 0 0 0 0 1 0 0 0 1]
10	$x^{10} + x^3 + 1$	[1 0 0 0 0 0 0 1 0 0 1]

Symbol Width	Default Polynomials	Array Representation
11	$x^{11} + x^2 + 1$	[1 0 0 0 0 0 0 0 1 0 1]
12	$x^{12} + x^6 + x^4 + x + 1$	[1 0 0 0 0 1 0 1 0 0 1 1]

- **Generator start:** specifies the first root r of the generator polynomial. The generator polynomial $g(x)$ is given by:

$$g(x) = \prod_{i=0}^{n-k-1} (x - \alpha^{h(r+j)})$$

- where α is a primitive element of the symbol field, and the scaling factor h is described below.
- **Scaling factor for generator polynomial:** specifies the scaling factor for the code. Ordinarily the scaling factor is 1, but can be as large as $2^S - 1$ where s is the symbol width. The value must be chosen so that α^h is primitive, i.e., the value must be relatively prime to $2^S - 1$.
- **Memory style:** allows you to select between distributed, block and automatic memory choices. This option is available only for CCSDS codes.
- **Check symbol generator:** allows you to select between optimized for area or flexibility. This option is available when variable number of check symbols are presented at the encoder input.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following Xilinx LogiCORE™ RS Encoder:


System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
RS Encoder v5_0	RS Encoder	V5.0	•	•			•	•	•	

This is a licensed core, available for purchase on the Xilinx web site at:

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=DO-DI-RSE.

RS Encoder v6_0

This block is listed in the following Xilinx Blockset libraries: *Communications and Index*.




The Reed-Solomon (RS) codes are block-based error correcting codes with a wide range of applications in digital communications and storage.

They are used to correct errors in many systems such as digital storage devices, wireless or mobile communications, and digital video broadcasting.


The Reed-Solomon encoder augments data blocks with redundant symbols so that errors introduced during transmission can be corrected. Errors may occur for a number of reasons (noise or interference, scratches on a CD, etc.). The Reed-Solomon decoder attempts to correct errors and recover the original data. The number and type of errors that can be corrected depends on the characteristics of the code.

A typical system is shown below:



Reed-Solomon codes are Bose-Chaudhuri-Hocquenghem (BCH) codes, which in turn are linear block codes. An (n, k) linear block code is a k -dimensional sub space of an n -dimensional vector space over a finite field. Elements of the field are called symbols. For a Reed-Solomon code, n ordinarily is $2^S - 1$, where s is the width in bits of each symbol. When the code is shortened, n is smaller. The encoder handles both full length and shortened codes.

The encoder is systematic. This means it constructs code blocks of length n from information blocks of length k by adjoining $n-k$ parity symbols.



A Reed-Solomon code is characterized by its field and generator polynomials. The field polynomial is used to construct the symbol field, and the generator polynomial is used to calculate parity symbols. The encoder allows both polynomials to be configured. The generator polynomial has the form:

$$g(x) = (x - \alpha^j)(x - \alpha^{j+1}) \dots (x - \alpha^{j+n-k-1})$$

where α is a primitive element of the finite field having $n + 1$ elements.

Block Interface

The Xilinx Reed-Solomon Encoder block has inputs `data_in`, `bypass`, and `start`, and outputs `data_out` and `info`. It also has optional inputs `n_in`, `r_in`, `nd`, `rst` and `en`. It also has optional outputs `rdy`, `rfd`, and `rffd`.

The following describes the ports in detail:

- **data_in**: presents blocks of symbols to be encoded. Each block consists of k information symbols followed by $n - k$ un-interpreted filler symbols. The `din` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **start**: tells the encoder when to begin processing symbols from `din`. The encoder discards input symbols until the first time `start` is asserted. The symbol on which `start` is asserted marks the beginning of the first n symbol blocks to be processed by the encoder. If `start` is asserted for more than one sample period, the value at the last period is taken as the beginning of the block. The `start` signal is ignored if `bypass` is asserted simultaneously. The signal driving `start` must be `Bool`.
- **bypass**: when `bypass` is asserted, the value on `din` is passed unchanged to `dout` with a delay of 4 (6 in the case of CCSDS) sample periods. The `bypass` signal has no effect on the state of the encoder. The signal driving `bypass` must be `Bool`.
- **n_in**: `n_in` is sampled at the start of each block. The new block's length, `n_block`, is set to `n_in` sampled. The `n_in` signal must have type `UFIX_s_0`, where s is the width in bits of each symbol.
- **r_in**: `r_in` is sampled at the start of each block. The new block's length, `r_block`, is set to `r_in` sampled. The `r_in` signal must have type `UFIX_p_0`, where p is the number of bits required to represent the parity bits ($n-k$) in the default code word.
- **nd**: marks each `data_in` symbol as part of the information symbols for processing parity symbols. The signal driving `nd` must be `Bool`.
- **rst**: carries the reset signal. The signal driving `rst` must be `Bool`.
- **en**: carries the enable signal. The signal driving `en` must be `Bool`.
- **data_out**: produces blocks of n symbols that represent the results of encoding blocks of k information symbols read from `data_in`. The type of `data_out` is the same as that for `data_in`.
- **info**: equals 1 (respectively, 0) when the value presented on `data_out` is an information (respectively, parity) symbol. `info` must have type `UFIX_1_0`.
- **rdy**: marks each symbol produced on `data_out` as valid or invalid. `rdy` must have type `UFIX_1_0`.
- **rfd**: equals 1 when the encoder is accepting and producing information symbols, and is 0 when producing parity symbols. `rfd` must have type `UFIX_1_0`.
- **rffd**: equals 1 when the encoder is ready to accept a new `start` pulse. `rffd` must have type `UFIX_1_0`.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:

- **Code specification**: specifies the encoder type. The choices are:
 - ♦ **Custom**: allows you to set all the block parameters.
 - ♦ **ATSC**: implements ATSC (Advanced Television Systems Committee) standard (207, 187) shortened RS code.
 - ♦ **CCSDS**: implements CCSDS (Consultative Committee for Space Data Systems) standard (255, 223) full length RS code.

- ♦ **DVB:** implements DVB (Digital Video Broadcasting) standard (204, 188) shortened RS code.
- ♦ **IESS-308 (126):** implements IESS-308 (INTELSAT Earth Station Standard) specification (126, 112) shortened RS code.
- ♦ **IESS-308 (194):** implements IESS-308 specification (194, 178) shortened RS code.
- ♦ **IESS-308 (208):** implements IESS-308 specification (208, 192) shortened RS code.
- ♦ **IESS-308 (219):** implements IESS-308 specification (219, 201) shortened RS code.
- ♦ **IESS-308 (225):** implements IESS-308 specification (225, 205) shortened RS code.
- ♦ **ITU-J.83 Annex B:** implements ITU-J.83 Annex B specification (128, 122) extended RS code.
- **Number of channels:** tells the number of separate time division multiplexed channels to be processed by the encoder. The encoder supports up to 128 channels.
- **Provide variable number of check symbols (r_in):** when checked, the block is given a r_in and n_in input.
- **Provide variable block length port (n_in):** when checked, the block is given a n_in input.
- **Provide new data port (nd):** when checked, the block is given a nd input.
- **Provide ready port (rdy):** when checked, the block is given a rdy output.
- **Provide ready for data port (rfd):** when checked, the block is given a rfd output.
- **Provide ready for first data port (rffd):** when checked, the block is given a rffd output.
- **Symbol width:** tells the width in bits for symbols in the code. The encoder support widths from 3 to 12.
- **n (number of symbols per code block):** tells the number of symbols in the blocks the encoder produces. Acceptable numbers range from 3 to $2^s - 1$, where s denotes the symbol width.
- **k (number of information symbols per code block):** tells the number of information symbols each block contains. Acceptable values range from $\max(n - 256, 1)$ to $n - 2$.
- **Field polynomial:** specifies the polynomial from which the symbol field is derived. It must be specified as a binary array whose first (resp., last) element tells the coefficient of the highest degree (resp., constant) term. This polynomial must be primitive. A value of zero indicates the default polynomial should be used. Default polynomials are listed in the table below.

Symbol Width	Default Polynomials	Array Representation
3	$x^3 + x + 1$	[1 0 1 1]
4	$x^4 + x + 1$	[1 0 0 1 1]
5	$x^5 + x^2 + 1$	[1 0 0 0 1 1]
6	$x^6 + x + 1$	[1 0 0 0 0 1 1]
7	$x^7 + x^3 + 1$	[1 0 0 0 1 0 0 1]
8	$x^8 + x^4 + x^3 + x^2 + 1$	[1 0 0 0 1 1 1 0 1]
9	$x^9 + x^4 + 1$	[1 0 0 0 0 1 0 0 0 1]
10	$x^{10} + x^3 + 1$	[1 0 0 0 0 0 0 1 0 0 1]

Symbol Width	Default Polynomials	Array Representation
11	$x^{11} + x^2 + 1$	[1 0 0 0 0 0 0 0 1 0 1]
12	$x^{12} + x^6 + x^4 + x + 1$	[1 0 0 0 0 1 0 1 0 0 1 1]

- **Generator start:** specifies the first root r of the generator polynomial. The generator polynomial $g(x)$ is given by:

$$g(x) = \prod_{i=0}^{n-k-1} (x - \alpha^{h(r+j)})$$

- where α is a primitive element of the symbol field, and the scaling factor h is described below.
- **Scaling factor for generator polynomial:** specifies the scaling factor for the code. Ordinarily the scaling factor is 1, but can be as large as $2^S - 1$ where s is the symbol width. The value must be chosen so that α^h is primitive, i.e., the value must be relatively prime to $2^S - 1$.
- **Memory style:** allows you to select between distributed, block and automatic memory choices. This option is available only for CCSDS codes.
- **Check symbol generator:** allows you to select between optimized for area or flexibility. This option is available when variable number of check symbols are presented at the encoder input.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following Xilinx LogiCORE™ RS Encoder:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
RS Encoder v6_0	RS Encoder	V6.0		•				•	•	•

This is a licensed core, available for purchase on the Xilinx web site at:

http://www.xilinx.com/xlnx/xebiz/designResources/ip_product_details.jsp?key=DO-DI-RSE.

Sample Time


This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The Sample Time block reports the normalized sample period of its input. A signal's normalized sample period is not equivalent to its Simulink absolute sample period. In hardware, this block is implemented as a constant.

Scale

This block is listed in the following Xilinx Blockset libraries: Data Types, Math, and Index.



The Xilinx Scale block scales its input by a power of two. The power can be either positive or negative. The block has one input and one output. The scale operation has the effect of moving the binary point without changing the bits in the container

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The only parameter that is specific to the Scale block is Scale factor s . It can be a positive or negative integer. The output of the block is $i \cdot 2^k$, where i is the input value and k is the scale factor. The effect of scaling is to move the binary point, which in hardware has no cost (a shift, on the other hand, may add logic).


Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

The Scale block does not use a Xilinx LogiCORE™.

Serial to Parallel


This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Data Types, and Index.*



Serial to Parallel

The Serial to Parallel block takes a series of inputs of any size and creates a single output of a specified multiple of that size. The input series can be ordered either with the most significant word first or the least significant word first.

The following waveform illustrates the block's behavior:

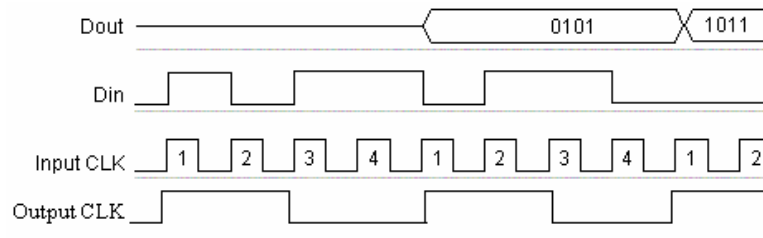

This example illustrates the case where the input width is 1, output width is 4, word size is 1 bit, and the block is configured for most significant word first.

Block Interface

The Serial to Parallel block has one input and one output port. The input port can be any size. The output port size is indicated on the block parameters dialog box.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:


- **Input order:** Least or most significant word first.
- **Arithmetic type:** Signed or unsigned output.
- **Number of bits:** Output width which must be a multiple of the number of input bits.
- **Binary point:** Output binary point location

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

An error is reported when the number of output bits cannot be divided evenly by the number of input bits. The minimum latency for this block is zero.

Shared Memory

This block is listed in the following Xilinx Blockset libraries: Index, Shared Memory.



The Xilinx Shared Memory block implements a random access memory (RAM) that can be shared among multiple designs or sections of a design.

A Shared Memory Block is uniquely identified by its name. In the blocks above, the shared memory has been named "Bar". Instances of Shared Memory "Bar", whether within the same model or in different models or even different instances of MATLAB, will share the same memory space. System Generator's hardware co-simulation interfaces allow shared memory blocks to be compiled and co-simulated in FPGA hardware. These interfaces make it possible for hardware-based shared memory resources to map transparently to common address spaces on a host PC. When used in System Generator co-simulation hardware, shared memories facilitate high-speed data transfers between the host PC and FPGA, and bolster the tool's real-time hardware co-simulation capabilities.

Starting with the 9.2 release, during netlisting, each pair of **Shared Memory** blocks with the same name are stitched together as a BRAM-based "Dual Port RAM block" in the netlist. For **Shared Memory** blocks that do not form a pair, their input and output ports are pushed to the top level of System Generator design. A pair of matching blocks can exist anywhere in the design hierarchy, however, if more than two **Shared Memory** blocks with the same name exist in the design, then an error is issued.

For backward compatibility, you can set the MATLAB global variable `xlSgSharedMemoryStitch` to "off" to bring System Generator back to the netlisting behavior before the 9.2 release. For example, from the MATLAB command line, enter the following:

```
global xlSgSharedMemoryStitch;
xlSgSharedMemoryStitch = 'off';
```


Block Interface

By default, the shared memory block has 3 inputs (`addr`, `din` and `we`) and 1 output (`dout`). Access to the shared memory can be protected by setting the Access protection parameter to Lockable. Setting access protection to Lockable causes two additional ports to appear; an input port `req` and an output port `grant`.

The `addr` port should be driven by a signal of type `UFIX_N_0`, where `N` equals `ceil(log2(depth))`. The memory word size is determined, at compile-time, by the bit width of the signal driving `din`. Driving the write enable port (`we`) with 1 indicates that the value on the `din` port should be written to the memory address pointed to by port `addr`.

When access protection is set to Lockable, the `req` and `grant` ports are used to control access to the memory. Before a read or write can occur, a request must first be made by setting `req` to 1. When `grant` becomes 1, the request for access has been allowed and read or write operations can proceed. The figure below shows the relationship between the `req`, `grant`

and we ports. The figure also shows that the block output is suppressed until access to the memory is granted.

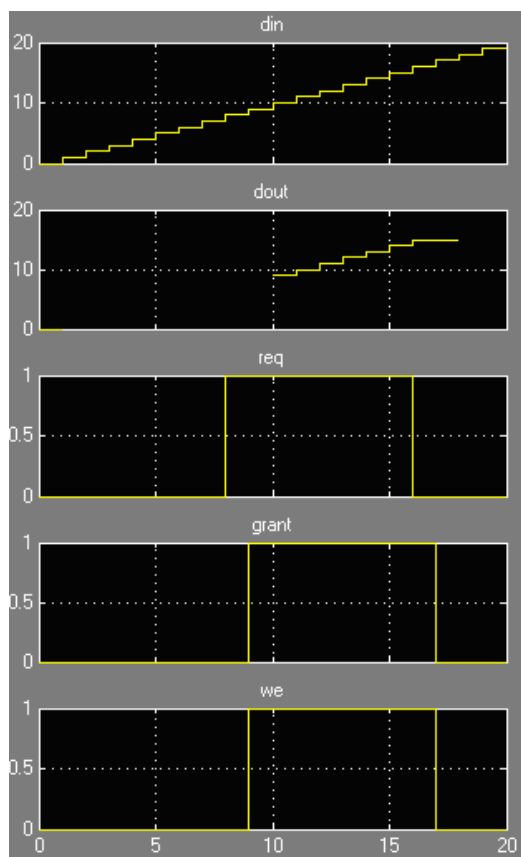


The output during a write operation depends on the write mode. When the we is 0, the output port has the value at the location specified by the address line. During a write operation (we asserted), the data presented on the input data port is stored in memory at the location selected by the port's address input. During a write cycle, you can configure the behavior of the data out port to one of the following choices:

- Read After Write
- Read Before Write
- No Read On Write

The write modes can be described with the help of the figure below. In the figure below, the memory has been set to an initial value of 5 and the address bit is specified as 2. When using No Read On Write mode, the output is unaffected by the address line and the output is the same as the last output when we was 0. When we is 1, dout holds its previous value until we is 1. In the figure below, you see dout reflecting the value of addr position 2, one cycle after we is set to 1.

For the other two modes, the output is obtained from the location specified by the address line, and hence is the value of the location being written to. This means that the output can be the old value which corresponds to Read After Write.

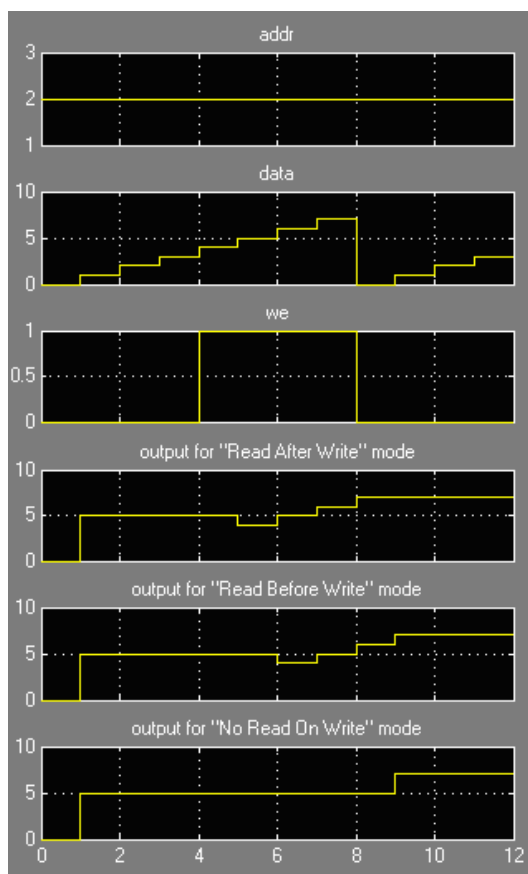

Virtex™, Virtex-E and Spartan™-II families support only Read After Write. Virtex-II, Virtex-II Pro, Virtex-4 and Spartan-3 support all modes.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Shared memory name:** name of the shared memory. All memories with the same name share the same physical memory.
- **Depth:** specifies the number of words in the memory. The word size is inferred from the bit width of the data port din.
- **Ownership and initialization:** indicates whether the memory is Locally owned and initialized or Owned and initialized elsewhere. If the memory is locally owned and initialized, the Initial value vector parameter is made available. A block that is Locally owned and initialized is responsible for creating an instance of the memory. A block that is Owned and initialized elsewhere attaches itself to a memory instance that has already been created. As a result, if two shared memory blocks are used in two

different models during simulation, the model containing the Locally owned and initialized block has to be started first.

- **Initial value vector:** specifies initial memory contents. The size and precision of the elements of the initial value vector are inferred from the type of the data samples that drive `din`. When the vector is longer than the RAM, the vector's trailing elements are discarded. When the RAM is longer than the vector, the RAM's trailing words are set to zero. The initial value vector is saturated and rounded according to the precision specified on the data port `din`.
- **Access protection:** either Lockable or Unprotected. An unprotected memory has no restrictions concerning when a read or write can occur. In a locked shared memory, the block can only be written to when granted access to the memory. When the grant port outputs a 1, access is granted to the memory and the write request can proceed.
- **Access mode:** specifies the way in which the memory is used by the design. When Read and write mode is used, the block is configured with `din` and `dout` ports. When Read only mode is used, the block is configured with a `dout` port for memory read access. When Write only mode is used, the block is configured with a `din` port for memory write access.
- **Write mode:** specifies the memory behavior to be Read after write, Read before write, or No read on write. There are device specific restrictions on the applicability of these modes.
- **Memory access timeout (sec):** when the memory is running in hardware, this specifies the maximum time to wait for the memory to respond to a request.
- **Latency:** may be set to 1 or 2.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The block uses the Xilinx LogiCORE™ Dual Port Block Memory Generator 2.6.

See Also


The following documents are provided as part of the System Generator documentation and give valuable insight into using and understanding the Shared Memory block:

[Multiple Subsystem Generator](#)

[Co-Simulating Shared Registers](#)

Shared Memory Read

This block is listed in the following Xilinx Blockset libraries: *Shared Memory and Index*.



The Xilinx Shared Memory Read block provides a high-speed interface for reading data from a Xilinx shared memory object. Both FIFO and lockable shared memory objects are supported by the block.

The requested data is read out of the shared memory and into a Simulink scalar, vector, or matrix signal which is written to the block's output port. The bracketed text beneath the block indicates shared memory with which this block interfaces. The depth and width displays on the block indicate the size of the shared memory. These values are updated at runtime when the block makes the connection to the shared memory object.

The Shared Memory Read block performs several transactions with its associated shared memory object when it is woken up during a simulation. The frequency at which the block is woken up is determined by its **Sample Time** parameter. The type of transactions performed depends on whether the block is associated with a FIFO or lockable shared memory object.

FIFO Transactions

The transactions with a shared FIFO object are listed below in their order of occurrence during a simulation cycle:

- **Wait for Data:** The Shared Memory Read block waits for the number of words specified in the Output dimensions field to become available in the shared FIFO object. If the number of words fails to become available in the FIFO after 15 seconds, it will time out and the simulation will terminate.
- **Read Data:** Once the block ensures a sufficient number of words are available, the Shared Memory Read block will read data from the shared FIFO object.

Lockable Memory Transactions

The transactions with a lockable shared memory are listed below in their order of occurrence during a simulation cycle:

- **Acquire Lock:** Before the Shared Memory Read block may read the shared memory contents, it must acquire lock over the shared memory object. If the block fails to gain lock after 15 seconds, it will time out and the simulation will terminate.
- **Read Data:** Once lock is acquired, the Shared Memory Read block will read data from the shared memory object.
- **Release Lock:** The Shared Memory Read block releases the lock after reading data from the shared memory object.

The Shared Memory Read block is useful for simulation only and is ignored during netlisting. In particular, the Shared Memory Read block can be applied to hardware co-simulation designs with high throughput requirements. For more information on how this done, see the topic [Real-Time Signal Processing using Hardware Co-Simulation](#)

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Shared memory name:** This parameter tells the unique string identifier for the Xilinx shared memory object from which data should be read. The shared memory must be a shared FIFO or lockable memory that is created and initialized elsewhere (i.e., the Shared Memory Read block does not create the specified shared memory object).
- **Type:** Tells whether the block should read from a Xilinx shared FIFO or Lockable memory object.
- **Sample time:** Specifies how often this block should read from the shared memory.

Output Type tab

Parameters specific to the Output Type tab are as follows:

- **Data type:** Specifies how shared memory data words should be interpreted by the Shared Memory Read block. The Simulink scalar, vector, or matrix signal that is generated will be of the chosen data type. The supported data types are int8, uint8, int16, uint16, int32, and uint32. The width of the chosen data type must match the width of the data stored in the shared memory object. For example, if the width of the shared memory data is 16 bits, then you may choose int16 or uint16.
- **Output dimensions:** Specifies how the shared memory data image should be interpreted, by giving the size of each available dimension. For a vectored output, only a single dimension (N) must be specified. For a matrix output, specify the dimensions in a two-element array [M, N], where M gives the number of rows, and N gives the number of columns. The total number of elements in the output (N, or M*N) must not be greater than the depth of the shared memory.
- **Use frame-based output:** Specifies whether the output signal from the Shared Memory Read block should be represented as a frame-based signal or a sample-based signal. Frame-based signals represent consecutive sample-based signals that have been buffered together. For example, a frame-based output would be suitable for driving a Simulink Unbuffer block. Note that enabling frame-based output requires a two-dimensional output specified in the Output Dimensions parameter.


See Also

[Shared Memory Write](#)

[Real-Time Signal Processing using Hardware Co-Simulation](#)

Shared Memory Write

This block is listed in the following Xilinx Blockset libraries: *Shared Memory and Index*.



The Xilinx Shared Memory Write block provides a high-speed interface for writing data into a Xilinx shared memory object. Both FIFO and lockable shared memory objects are supported by the block.

The Shared Memory Write block input port should be driven by the Simulink scalar, vector, or matrix signal containing the data you would like written into the shared memory object. The bracketed text beneath the block indicates the shared memory with which this block interfaces. The depth and width displays on the block indicate the size of the shared memory - these values are updated at runtime when the block makes the connection to shared memory. The width of the input data must match the width of the shared memory, and the total number of elements in the input must not be bigger than the depth of the shared memory object.

The Shared Memory Write block performs several transactions with its associated shared memory object when it is woken up during a simulation. The frequency at which the block is woken up is determined by its sample period, which is inherited from the signal driving its input port. The type of transactions performed depends on whether the block is associated with a FIFO or lockable shared memory object.

FIFO Transactions

The transactions with a shared FIFO object are listed below in their order of occurrence during a simulation cycle:

- **Wait for Available Storage:** The Shared Memory Write block waits for storage to become available in the shared FIFO object. The amount of storage depends on the size (i.e., the number of words) of the signal driving the data input port. For example, if the input signal is 256 words wide, the Shared Memory Write block waits for 256 words to become available in the shared FIFO. If the storage fails to become available after 15 seconds, it will time out and the simulation will terminate.
- **Write Data:** Once the block ensures a sufficient amount of available, the Shared Memory Write block will write data into the shared FIFO object.

Lockable Memory Transactions

- **Acquire Lock:** Before the Shared Memory Write block may write to the shared memory contents, it must acquire lock over the shared memory object. If the block fails to gain lock after 15 seconds, it will time out and the simulation will terminate.
- **Write Data:** Once lock is acquired, the Shared Memory Write block will write data to the shared memory object.
- **Release Lock:** The Shared Memory Write block releases the lock after writing data to the shared memory object.

The Shared Memory Write block is useful for simulation only and is ignored during netlisting. In particular, the Shared Memory Write block can be applied to hardware co-simulation designs with high throughput requirements. For more information on how this done, see the topic [Real-Time Signal Processing using Hardware Co-Simulation](#).

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the Shared Memory Write block are:

Shared Memory Name: This parameter gives the unique string identifier for the shared memory to which the block should write the incoming data. The memory must be a lockable memory that is created and initialized elsewhere (i.e., the Shared Memory Write block does not create the specified shared memory object).

Type: Tells whether the block should write to a Xilinx shared FIFO or Lockable memory object.


See Also

[Shared Memory Read](#)

[Real-Time Signal Processing using Hardware Co-Simulation](#)

Shift

This block is listed in the following Xilinx Blockset libraries: Control Logic, Data Types, Math and Index.



The Xilinx Shift block performs a left or right shift on the input signal. The result will have the same fixed-point container as that of the input.

Block Parameters

Parameters specific to the Shift block are:

- **Shift direction:** specifies a direction, Left or Right. The Right shift moves the input toward the least significant bit within its container, with appropriate sign extension. Bits shifted out of the container are discarded. The Left shift moves the input toward the most significant bit within its container with zero padding of the least significant bits. Bits shifted out of the container are discarded.
- **Number of bits:** specifies how many bits are shifted. If the number is negative, direction selected with Shift direction is reversed.


Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

The Shift block does not use a Xilinx LogiCORE™.

Simulation Multiplexer

This block appears only in the Index library of the Xilinx Blockset.




The Simulation Multiplexer has been deprecated in System Generator.

It is expected that the block will be eliminated in a future version of the Xilinx Blockset. The functionality supplied by this block is now available through System Generator's support for Simulink's configurable subsystem capabilities. The use of configurable subsystems offers several advantages over the use of Simulation Multiplexer blocks.

The Simulation Multiplexer is a System Generator block that allows two portions of a design to work in parallel, with simulation results provided by the first portion and hardware provided by the second.

This is useful, for example, when a subsystem is defined in the usual way with Simulink blocks, but black box HDL is used to implement the subsystem in hardware. An example is shown below.

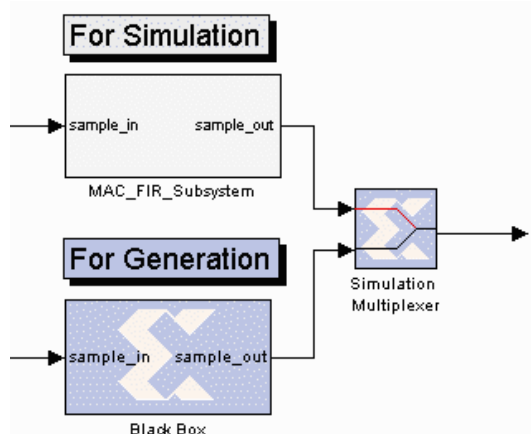

Using Subsystem for Simulation and Black Box for Hardware

The Simulation Multiplexer has two inputs ports. In the block parameters dialog box, one port can be identified as For Simulation and a second as For Generation. The portion of the design that drives the For Simulation port is used as the simulation model, and the portion that drives For Generation is used to produce hardware. The same port can be used for both. In this case the portion of the design that drives the combined For Simulation/For Generation port is used both for simulation and to produce hardware, while the other portion is ignored. It should be noted that simulation results from a design that contains a Simulation Multiplexer need not be bit and cycle accurate.

The Simulation Multiplexer is useful whenever there is a difference between what should be used for simulation and what should be used in hardware. For example, a hardware co-simulation token with an accompanying FPGA bitstream can be simulated but cannot be translated into hardware. If the HDL used to produce the bitstream is available, a black box can incorporate the HDL. Driving a Simulation Multiplexer's For Simulation port with the token and its For Generation port with the black box makes it possible both to simulate the design and to produce hardware. Another use for the multiplexer is to switch between black boxes that incorporate different types of HDL. One might provide behavioral HDL to be used in simulation, and the other might provide RTL to be used for implementation.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are:

For Simulation, Pass Through Data from Input Port: Determines which input port (either 1 or 2) is used for simulation.

For Generation, Pass Through Data from Input Port: Determines which input port (either 1 or 2) is used for generation.

SineCosine

This block is listed in the following Xilinx Blockset libraries: *Math and Index*.



The Xilinx SineCosine block computes $\sin(x)$ and/or $\cos(x)$. It stores a reference sinusoid in a read-only memory (ROM) whose depth is defined by the width of the block's single input port.

An N-bit input address results in a logical ROM containing $2N$ equally spaced samples of one period. (In practice, the implementation may reduce memory size by storing only a fraction of one full period.) The input signal must be an unsigned integer.

The block can produce a sine or cosine (or its negative) at one output port, or both sine and cosine (or their negatives) at two output ports, depending on parameter settings. Stepping through the memory produces sampled sinusoids on the block's output port(s), with output frequency determined by the address increment.

When non-symmetrical output is selected, output samples are in the interval $[-1, 1/(2^w-1)]$ where w denotes the output width. When symmetrical output is selected, output samples are in $[-1, 1]$.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:

- **Function:** specifies output to be sine, cosine, or both.
- **Negative sine:** when selected, the sine output is negated.
- **Negative cosine:** when selected, the cosine output is negated.
- **Output width:** specifies the number of bits in the output. The valid range is from 4 to 32, inclusive. The output is stored as a two's complement value with one integer sign bit. As a result, the range of values stored in the table lies in the half-open interval $[-1, 1]$.
- **Symmetric output:** When selected, the output is symmetric.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block always uses the Xilinx LogiCORE™ Sine/Cosine Look-Up Table. The input and output widths determine whether the ROM stores a full or quarter wave. When distributed memory is used, the ROM stores a full wave for table depths less than or equal to 64. This corresponds to one CLB per output bit. If the table depth is greater than 64, a quarter wave is stored, and additional logic is used to generate the remaining portions of the wave. Storing only the quarter wave for the large tables reduces the area needed. Block memory stores a full wave for all table depths and widths that can be implemented in a single block memory. Otherwise, values are stored as a quarter wave. Latency for the

distributed ROM implementation is determined by the input width, pipelining, and the selected latency.

Input Width	Latency Range using Distributed ROM
3-6	1-2
7-8	1-4
9-10	1-5

The minimum pipeline for block ROM implementations is 1, thus the minimum latency is 1. The maximum latency for block ROM is also 1 except for the cases outlined in the table below.

Input Width	Output Width	Latency Using Block ROM
Greater than 10	Greater than 16	2
Equal to 10	Greater than 4	2
Greater than 9	Greater than 8	2

Xilinx LogiCore

This block uses the following Xilinx LogiCORE™ SineCosine:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
SineCosine	Sine Cosine	V5.0	•	•			•	•	•	

Single Port RAM

This block is listed in the following Xilinx Blockset libraries: Control Logic, Memory, and Index.



The Xilinx Single Port RAM block implements a random access memory (RAM) with one data input and one data output port.

Block Interface

The block has one output port and three input ports for address, input data, and write enable (WE). Values in a Single Port RAM are stored by word, and all words have the same arithmetic type, width, and binary point position.

A single-port RAM can be implemented using either block memory or distributed memory resources in the FPGA. Each data word is associated with exactly one address that must be an unsigned integer in the range 0 to d-1, where d denotes the RAM depth (number of words in the RAM). An attempt to read past the end of the memory is caught as an error in the simulation, though if a block memory implementation is chosen, it may be possible to read beyond the specified address range in hardware (with unpredictable results). The initial RAM contents can be specified through the block parameters.

The write enable signal must be Bool, and when its value is 1, the data input is written to the memory location indicated by the address input. The output during a write operation depends on the choice of memory implementation.

The behavior of the output port depends on the write mode selected (see below). When the WE is 0, the output port has the value at the location specified by the address line.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this block are:

- **Depth:** the number of words in the memory; must be a positive integer.
- **Initial value vector:** the initial contents of the memory. When the vector length exceeds the memory depth, values with index higher than depth are ignored. When the depth exceeds the vector length, memory locations with addresses higher than the vector length are initialized to zero. Initialization values are saturated and rounded (if necessary) according to the precision specified on the data port.
- **Write Mode:** specifies memory behavior when WE is asserted. Supported modes are: Read before write, Read after write, and No read On write. Read before write indicates the output value reflects the state of the memory before the write operation. Read after write indicates the output value reflects the state of the memory after the write operation. No read on write indicates that the output value remains unchanged irrespective of change of address or state of the memory. There are device specific restrictions on the applicability of these modes. Also refer to the write modes and hardware notes topic below for more information.
- **Memory Type:** option to select between block and distributed RAM.

- **Provide reset port for output register:** exposes a reset port controlling the output register of the Block RAM. Note: this port does not reset the memory contents to the initialization value. The reset port is available only when the latency of the Block RAM is set to 1.
- **Initial value for output register:** the initial value for output register. The initial value is saturated and rounded as necessary according to the precision specified on the data port of the Block RAM. The option to set initial value is available only for Virtex™-II, Virtex-II Pro, Spartan™-3, Spartan-3A DSP, Virtex-4, and Virtex-5 devices.

Other parameters used by this block are explained in the Common Parameters topic at the beginning of this chapter.


Write Modes

During a write operation (WE asserted), the data presented to the data input is stored in memory at the location selected by the address input. You can configure the behavior of the data out port A upon a write operation to one of the following modes:

- Read after write
- Read before write
- No read On write

These modes can be described with the help of the figure shown below. In the figure the memory has been set to an initial value of 5 and the address bit is specified as 4. When using No read on write mode, the output is unaffected by the address line and the output is the same as the last output when the WE was 0. For the other two modes, the output is obtained from the location specified by the address line, and hence is the value of the

location being written to. This means that the output can be either the old value (**Read before write mode**), or the new value (**Read after write mode**).

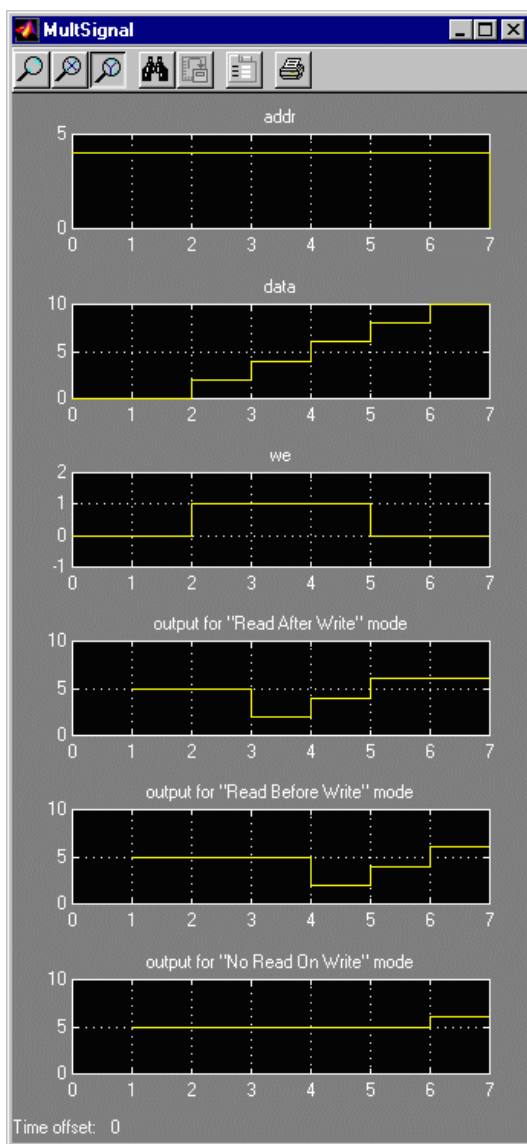

Virtex™, Virtex-E, and Spartan™-II FPGA families support only Read After Write mode. Virtex-II, Virtex-II Pro, Spartan-3, Spartan-3A DSP, Virtex-4, and Virtex-5 support all modes.

Hardware Notes

The distributed memory LogiCORE™ supports only the Read before write mode. The Xilinx Single Port RAM block also allows distributed memory with write mode option set to Read after write when specified latency is greater than 0. The Read after write mode for the distributed memory is achieved by using extra hardware resources (a MUX at the distributed memory output to latch data during a write operation).

When implementing single port RAM blocks on Virtex™-4, Virtex-5 and Spartan™-3A DSP devices, maximum timing performance is possible if the following conditions are satisfied:

- The option **Provide reset port for output register** is un-checked
- The option **Depth** is less than 16,384
- The option **Latency** is set to 2 or higher

Xilinx LogiCORE

The block always uses a Xilinx LogiCORE™: Single Port Block Memory or Distributed Memory.

For the block memory, the address width must be equal to $\text{ceil}(\log_2(d))$ where d denotes the memory depth. The maximum width of data words in the block memory depends on the depth specified; the maximum depth depends on the device family targeted. The tables below provide the maximum data word width for a given block memory depth.

Maximum Width for Various Depth Ranges (Virtex™/Virtex-E/Spartan™-3)

Depth	Width
2 to 2048	256
2049 to 4096	192
4097 to 8192	96
8193 to 16K	48
16K+1 to 32K	24
32K+1 to 64K	12
64K+1 to 128K	6
128K+1 to 256K	3

Width for Various Depth Ranges (Virtex-II/Virtex-II Pro/Virtex-4/Virtex-5/Spartan-3A DSP)

Depth	Width
2 to 8192	256
8193 to 16K	192
16K+1 to 32K	96
32K+1 to 64K	48
64K+1 to 128K	24
128K+1 to 256K	12
256K+1 to 512K	6
512K+1 to 1024K	3

When the distributed memory parameter is selected, LogiCORE™ Distributed Memory is used. The depth must be between 16 and 65536, inclusive for Virtex-II, Virtex-II Pro,


Spartan-3, Virtex-4, Virtex-5, and Spartan-3A DSP; depth must be between 16 to 4096, inclusive for the other FPGA families. The word width must be between 1 and 1024, inclusive.

This block uses the following Xilinx LogiCORE™s:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
	Single Port Block Memory	V6.1	•	•			•	•	•	
	Block Memory Generator	V2.4			•	•				•
	Distributed Memory	V7.1	•	•			•	•	•	
	Distributed Memory Generator	V3.3			•	•				•

Single-Step Simulation

This block is listed in the following Xilinx Blockset libraries: Tools and Index.



The Xilinx Single-Step Simulation block pauses the simulation each clock cycle when in single-step mode.


Double-clicking on the icon switches the block from single-step to continuous mode. When the simulation is paused, it can be restarted by selecting the **Start** button on the model toolbar .

Block Parameters

There are no parameters for this block.


Slice

This block is listed in the following Xilinx Blockset libraries: Basic Elements, Control Logic, Data Types, and Index



The Xilinx Slice block allows you to slice off a sequence of bits from your input data and create a new data value. This value is presented as the output from the block. The output data type is unsigned with its binary point at zero.

The block provides several mechanisms by which the sequence of bits can be specified. If the input type is known at the time of parameterization, the various mechanisms do not offer any gain in functionality. If, however, a Slice block is used in a design where the input data width or binary point position are subject to change, the variety of mechanisms becomes useful. The block can be configured, for example, always to extract only the top bit of the input, or only the integral bits, or only the first three fractional bits. The following diagram illustrates how to extract all but the top 16 and bottom 8 bits of the input.

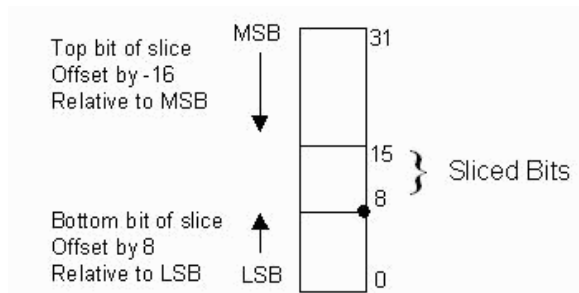

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:

- **Width of slice (Number of bits):** specifies the number of bits to extract.
- **Boolean output:** Tells whether single bit slices should be type Boolean.
- **Specify range as:** (Two bit locations | Upper bit location + width | Lower bit location + width). Allows you to specify either the bit locations of both end-points of the slice or one end-point along with number of bits to be taken in the slice.
- **Offset of top bit:** specifies the offset for the ending bit position from the LSB, MSB or binary point.
- **Offset of bottom bit:** specifies the offset for the ending bit position from the LSB, MSB or binary point.
- **Relative to:** specifies the bit slice position relative to the Most Significant Bit (MSB), Least Significant Bit (LSB), or Binary point of the top or the bottom of the slice.

Other parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

System Generator

This block is listed in the following Xilinx Blockset libraries: *Basic Elements, Tools, and Index.*




The System Generator block provides control of system and simulation parameters, and is used to invoke the code generator. Every Simulink model containing any element from the Xilinx Blockset must contain at least one System Generator block. Once a System Generator block is added to a model, it is possible to specify how code generation and simulation should be handled.

For a detailed discussion on how to use the block, see [Compiling and Simulating Using the System Generator Block](#).

Block Parameters.

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

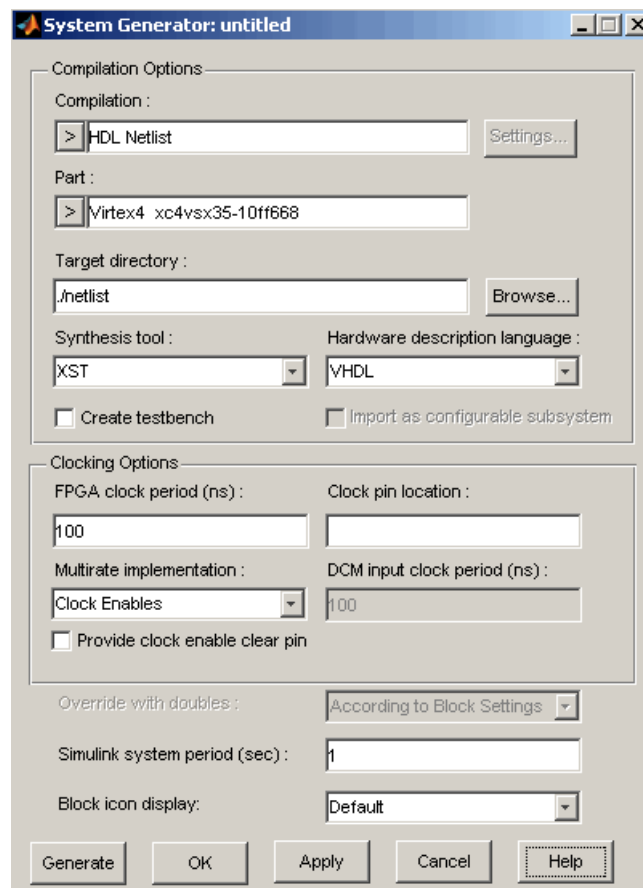

Parameters specific to the System Generator block are as follows:

Compilation Options

- **Compilation:** Specifies the type of compilation result that should be produced when the code generator is invoked. See [System Generator Compilation Types](#) for more details.

- **Part:** Defines the FPGA part to be used.
- **Target directory:** Defines where System Generator should write compilation results. Because System Generator and the FPGA physical design tools typically create many files, it is best to create a separate target directory, i.e., a directory other than the directory containing your Simulink model files.
- **Synthesis tool:** Specifies the tool to be used to synthesize the design. The possibilities are Synplicity's Synplify Pro, Synplify, and Xilinx's XST.
- **Hardware Description Language:** Specifies the HDL language to be used for compilation of the design. The possibilities are VHDL and Verilog.
- **Create testbench:** This instructs System Generator to create a HDL testbench. Simulating the testbench in an HDL simulator compares Simulink simulation results with ones obtained from the compiled version of the design. To construct test vectors, System Generator simulates the design in Simulink, and saves the values seen at gateways. The top HDL file for the testbench is named <name>_testbench.vhd/.v, where <name> is a name derived from the portion of the design being tested.
Note: This option is not supported when shared-memory blocks are included in the design.

Clocking Options

- **FPGA clock period(ns):** Defines the period in nanoseconds of the system clock. The value need not be an integer. The period is passed to the Xilinx implementation tools through a constraints file, where it is used as the global PERIOD constraint. Multicycle paths are constrained to integer multiples of this value.
- **Clock pin location:** Defines the pin location for the hardware clock. This information is passed to the Xilinx implementation tools through a constraints file. This option should not be specified if the System Generator design is to be included as part of a larger HDL design.
- **Multirate implementation:**
 - ♦ **Clock Enables (default):** Creates a clock enable generator circuit to drive the multirate design.
 - ♦ **Hybrid DCM-CE:** Creates a clock wrapper with a DCM that can drive up to three clock ports at different rates for VirtexTM-4 and Virtex-5 and up to two clock ports for Spartan-3A DSP. The mapping of rates to the DCM output ports is done using the following priority scheme: CLK0 > CLK2x > CLKdv > CLKfx. If the design contains more clocks than the DCM can handle, the remaining clocks are supported through the Clock Enable configuration.
A reset input port is exposed on the DCM clock wrapper to allow resetting the DCM and a locked output port is exposed to help the external design synchronize the input data with the single clk input pin.
 - ♦ **Expose Clock Ports:** This option exposes multiple clock ports on the top-level of the System Generator design so you can apply multiple synchronous clock inputs from outside the design.


Refer to the topic [Timing and Clocking](#) for details

- **DCM input clock period(ns):** Specify if different than the **FPGA clock period(ns)** option (system clock). The FPGA clock period (system clock) will then be derived from this hardware-defined input.
- **Provide clock enable clear pin:** This instructs System Generator to provide a ce_clr port on the top level clock wrapper. The ce_clr signal is used to reset the clock enable generation logic. Capability to reset clock enable generations logic allows designs to

have dynamic control for specifying the beginning of data path sampling. See [Resetting Auto-Generated Clock Enable Logic](#) for details.


Other Options

- **Simulink system period(sec):** Defines the Simulink System Period, in units of seconds. The Simulink system period is the greatest common divisor of the sample periods that appear in the model. These sample periods are set explicitly in the block dialog boxes, inherited according to Simulink propagation rules, or implied by a hardware oversampling rate in blocks with this option. In the latter case, the implied sample time is in fact faster than the observable simulation sample time for the block in Simulink. In hardware, a block having an oversampling rate greater than one processes its inputs at a faster rate than the data. For example, a sequential multiplier block with an over-sampling rate of eight implies a (Simulink) sample period that is one eighth of the multiplier block's actual sample time in Simulink. This parameter may be modified only in a master block.
- **Block icon display:** Specifies the type of information to be displayed on the block icon. The block icon is updated with the selected display option after the design has been compiled. The various display options are described below:
 - ◆ **Default:** Displays the default block icon. A block's default icon is derived from the xbsIndex library.

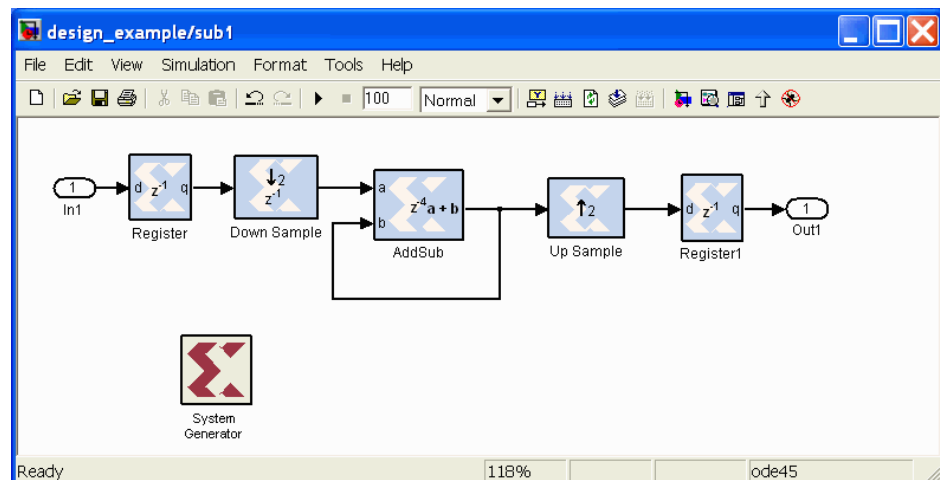


- ◆ **Normalized Sample Periods:** Displays the normalized sample periods for all the input and output ports on the block. For example, if the Simulink System Period is set to 4 and the sample period propagated to a block port is 4 then the normalized period that is displayed for the block port will be 1 and if the period


propagated to the block port is 8 then the sample period displayed would be 2 i.e. a larger number indicates a slower rate.

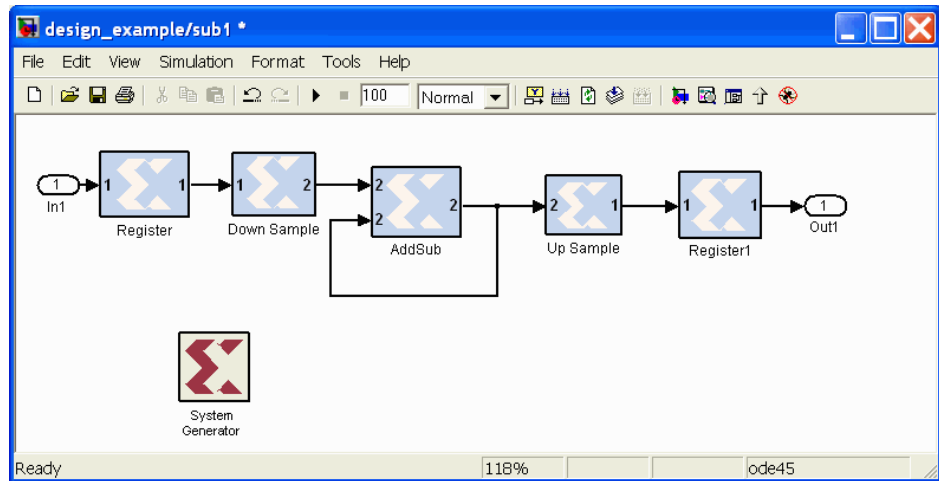


- ♦ **Pipeline stages:** Displays the latency information from the input ports of the block. The displayed pipeline stage might not be accurate for certain high level blocks such as the FFT, RS Encoder/ Decoder, Viterbi Decoder, etc. In this case the displayed pipeline information can be used to determine whether a block has a combinational path from the input to the output. For example, the Up Sample block in the figure below shows that it has a combinational path from the input to the output port.

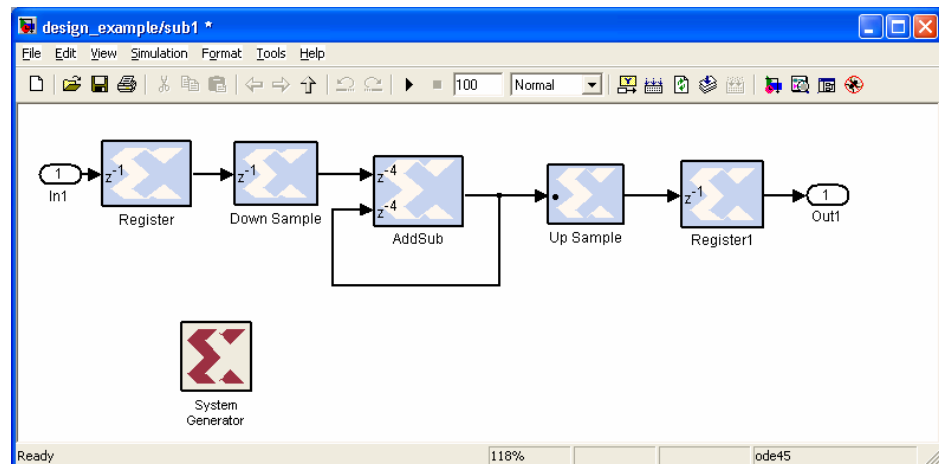


- ◆ **Sample frequencies (MHz):** Displays the sample frequencies for all input and output ports on the block. The frequency is derived by multiplying a port's normalized sample period with the FPGA clock period provided in the System Generator token. The sample frequency is given in MHz.

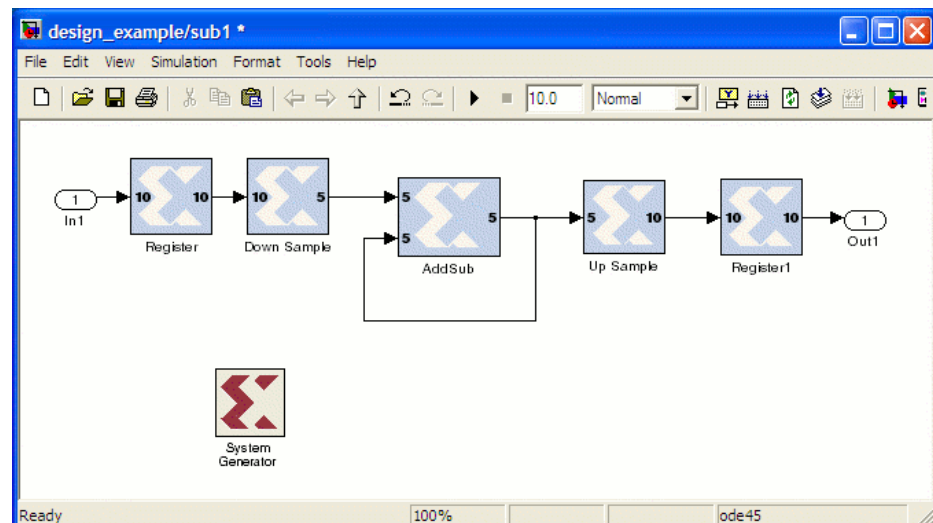


- ◆ **HDL port names:** Displays the corresponding HDL input and output port names on the netlisted entity for the block.

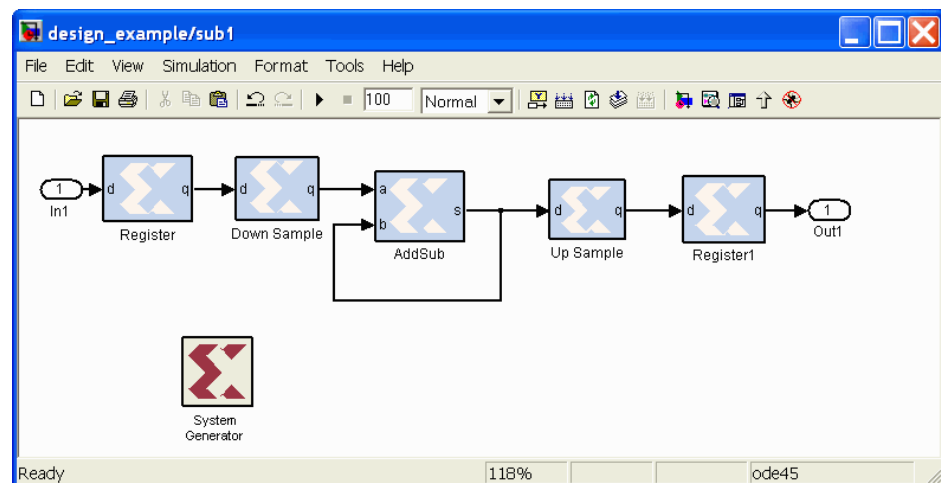

- ◆ **Input data types:** Displays the data types of the signals driving the input port of the block.

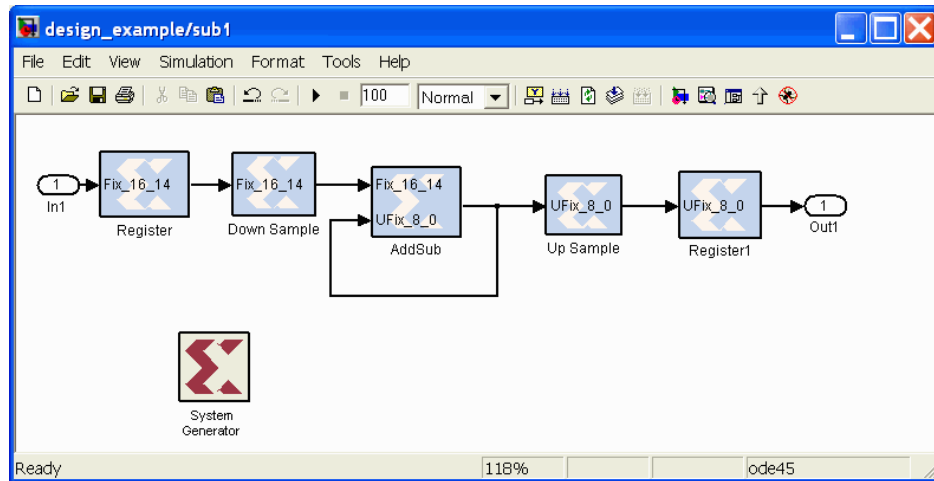

- ◆ **Output data types:** Displays the data types for the output ports on the block.

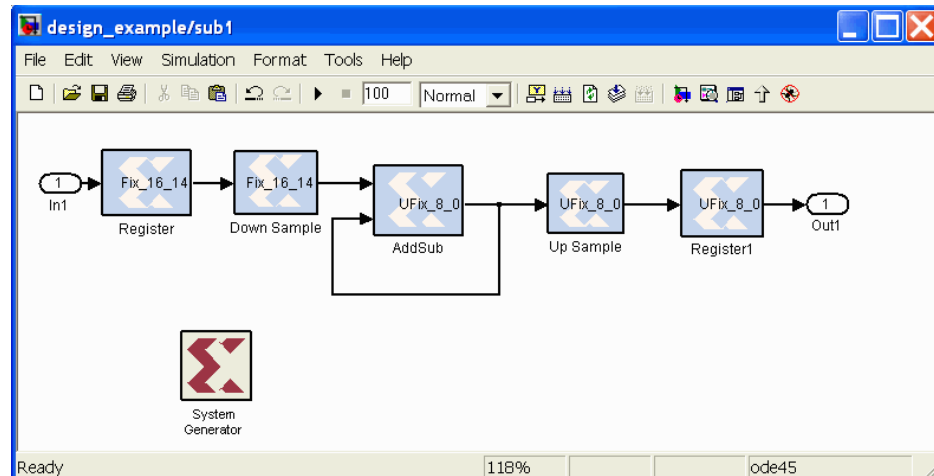

Threshold

This block is listed in the following Xilinx Blockset libraries: Math and Index.



The Xilinx Threshold block tests the sign of the input number. If the input number is negative, the output of the block is -1; otherwise, the output is 1. The output is a signed fixed-point integer that is 2 bits long. The block has one input and one output.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


The block parameters do not control the output data type because the output is always a signed fixed-point integer that is 2 bits long.

Xilinx LogiCORE

The Threshold block does not use a Xilinx LogiCORE™.

Time Division Demultiplexer

This block is listed in the following Xilinx Blockset libraries: *Basic Elements* and *Index*.




The Xilinx Time Division Demultiplexer block accepts input serially and presents it to multiple outputs at a slower rate.

Block Interface

The block has one data input port and a user-configurable number of data outputs, ranging from 1 to 32. The data output ports have the same arithmetic type and precision as the input data port. The time division demultiplexer block also has optional input-valid port (vin) and output-valid port (vout). Both the valid ports are of type Bool. The block has two possible implementations, single or multiple channel.

Single Channel Implementation

For single channel implementation, the time division demultiplexer block has one data input and output port. Optional data valid input and output ports are also allowed. The length of the frame sampling pattern establishes the length of the input data frame. The position of 1 indicates the input value to be downsampled and the number of 1's correspond to the downsampling factor. The behavior of the demultiplexer block in single channel mode can best be illustrated with the help of the figure below. Based on the frame sampling pattern entered, the first and second input values of every input data frame are sampled and presented to the output at the rate of 2.

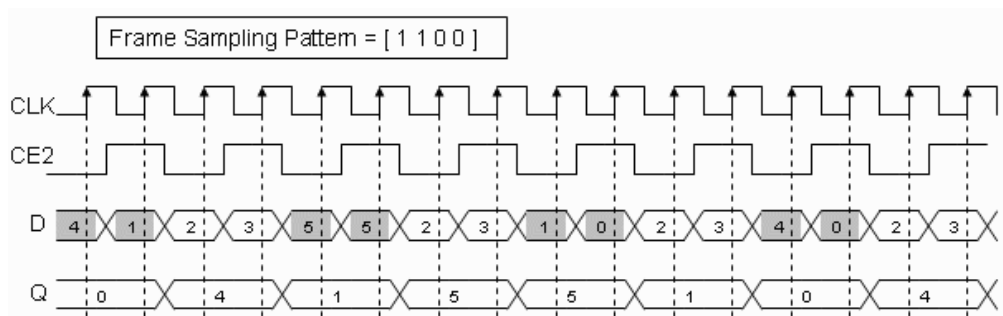

For single channel implementation, the number of values to be sampled from a data frame should evenly divide the size of the input frame. Every input data frame value can also be qualified by using the optional valid port.

Multiple Channel Implementation

For multiple channel implementation, the time division demultiplexer block has one data input port and multiple output ports equal to the number of 1's in the frame sampling pattern. Optional data valid input and output ports are also allowed. The length of the frame sampling pattern establishes the length of the input data frame. The position of 1 indicates the input value to be downsampled and presented to the corresponding output data channel. The behavior of the demultiplexer block in multiple channel mode can best be illustrated with the help of the figure below. Based on the frame sampling pattern

entered, the first and second input values of every input data frame are sampled and presented to the corresponding output channel at the rate of 4.

For multiple channel implementation, the down sampling factor is always equal to the size of the input frame. Every input data frame value can also be qualified by using the optional valid port.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this block are:

- Frame sampling pattern: specifies the size of the serial input data frame. The frame sampling pattern must be a MATLAB vector containing only 1's and 0's.
- Implementation: specifies the demultiplexer behavior to be either in single or multiple channel mode. The behaviors of these modes are explained above.
- Provide valid Port: when selected, the demultiplexer has optional input and output valid ports (vin / vout). The vin port allows to qualify every input data value as part of the serial input data frame. The vout port marks the state of the output ports as valid or not.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Time Division Multiplexer

This block is listed in the following Xilinx Blockset libraries: Basic Elements and Index.



The Xilinx Time Division Multiplexer block multiplexes values presented at input ports into a single faster rate output stream.

Block Interface

The block has two to 32 input ports and one output port. All input ports must have the same arithmetic type, precision, and rate. The output port has the same arithmetic type and precision as the inputs. The output rate is nr , where n is the number of input ports and r is their common rate. The block also has optional ports vin and $vout$ that specify when input and output respectively are valid. Both valid ports are of type Bool.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to the block are as follows:

- **Number of Inputs:** specifies the number of inputs (2 to 32).
- **Provide valid Port:** when selected, the multiplexer is augmented with input and output valid ports named vin and $vout$ respectively. When the vin port indicates that input values are invalid, the $vout$ port indicates the corresponding output frame is invalid

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

To FIFO

This block is listed in the following Xilinx Blockset libraries: Index.



The Xilinx To FIFO block implements the leading half of a first-in-first-out memory queue.

Values presented at the module's data port are written to the next available empty memory location when we input is one. The full output port is asserted when the FIFO is full. The percent full output port indicates the percentage of the FIFO that is full, represented with user-specified precision.

The To FIFO is implemented in hardware using the FIFO Generator v2.1 core. System Generator's hardware co-simulation interfaces allow the To FIFO block to be compiled and co-simulated in FPGA hardware. When used in System Generator co-simulation hardware, shared FIFOs facilitate high-speed transfers between the host PC and FPGA, and bolster the tool's real-time hardware co-simulation capabilities.

Starting with the 9.2 release, during netlisting, each pair of **From FIFO** and **To FIFO** blocks with the same name are stitched together as a BRAM-based **FIFO** block in the netlist. If a **From FIFO** or **To FIFO** block does not form a pair with another block, it's input and output ports are pushed to the top level of System Generator design. A pair of matching blocks can exist anywhere in the hierarchy of the design, however, if two or more **From FIFO** or **To FIFO** blocks with the same name exist in the design, then an error is issued.

For backward compatibility, you can set the MATLAB global variable `xlSgSharedMemoryStitch` to "off" to bring System Generator back to the netlisting behavior before the 9.2 release. For example, from the MATLAB command line, enter the following:

```
global xlSgSharedMemoryStitch;
xlSgSharedMemoryStitch = 'off';
```

Block Parameters

Basic tab

Parameters specific to the Basic tab are:

- **Shared memory name:** name of the shared FIFO. All FIFOs with the same name will share the same physical FIFO.
- **Ownership:** indicates whether the memory is Locally owned or Owned elsewhere. A block that is Locally owned is responsible for creating an instance of the FIFO. A block that is Owned elsewhere attaches itself to a FIFO instance that has already been created.
- **Depth:** specifies the number of words in the memory. The word size is inferred from the bit width of the port din.
- **Bits of precision to use for %full port:** specifies the bit width of the %full port. The binary point for this unsigned output is always at the top of the word. Thus, for example, if precision is set to one, the output can take two values: 0.0 and 0.5, the latter indicating the FIFO is at least 50% full.
- **Provide asynchronous reset port:** Activates an optional asynchronous reset (rst) port on the block.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE

This block is implemented with the Xilinx LogiCORE™ FIFO Generator:

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
To FIFO	FIFO Generator	V4.2	•	•	•	•	•	•	•	•

See Also

The following topics provide valuable insight into using and understanding the From FIFO block:

[From FIFO](#), [Multiple Subsystem Generator](#), [Co-Simulating Shared FIFOs](#)

To Register

This block is listed in the following Xilinx Blockset libraries: Index.



The Xilinx To Register block implements the leading half of a D flip-flop based register, having latency of one sample period. The register can be shared among multiple designs or sections of a design.

The block has two input ports. The **din** port accepts input data and sets the bit width of the register. The initial output value is specified by you in the block parameters dialog box (below). When the enable port **en** is asserted, data presented at the input appears at the output **dout** after one sample period. When **en** is not asserted, the last value written to the register is presented to the output port **dout**.

Starting with the 9.2 release, during netlisting, each pair of **To Register** and **From Register** blocks with the same name are stitched together as a single **Register** block in the netlist. If a **To Register** or **From Register** block does not form a pair with another block, it's input and output ports are pushed to the top level of System Generator design. A pair of matching blocks can exist anywhere in the hierarchy of the design, however, if two or more **To Register** or **From Register** blocks with the same name exist in the design, then an error is issued.

For backward compatibility, you can set the MATLAB global variable **xlSgSharedMemoryStitch** to "off" to bring System Generator back to the netlisting behavior before the 9.2 release. For example, from the MATLAB command line, enter the following:

```
global xlSgSharedMemoryStitch;
xlSgSharedMemoryStitch = 'off';
```

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab

Parameters specific to the Basic tab are as follows:

- **Shared memory name:** name of the shared register. There must be exactly one To Register block for a particular physical register. In addition, the shared memory name must be distinct from all other shared memory names in the design.
- **Initial value:** specifies the initial value in the register.
- **Ownership and initialization:** indicates whether the register is Locally owned and initialized or Owned and initialized elsewhere. A block that is locally owned is responsible for creating an instance of the register. A block that is owned elsewhere attaches itself to a register instance that has already been created. As a result, if two shared register blocks are used in two different models during simulation, the model containing the locally owned block has to be started first.


Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCORE


The To Register block is implemented as a synthesizable VHDL module. It does not use a Xilinx LogiCORE™.

Crossing Clock Domains

When a To Register and From Register block pair are used to cross clock domain boundaries, a single register is implemented in hardware. This register is clocked by the To Register block clock domain. For example, assume a design has two clock domains, Domain_A and Domain_B. Also assume that a shared register pair are used to cross the two clock domains shown below.

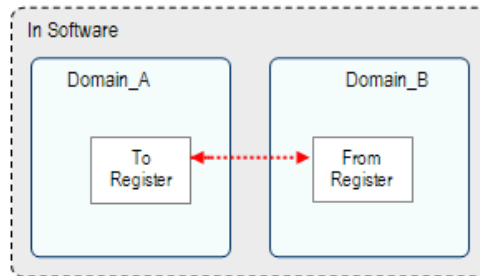

When the design is generated using the [Multiple Subsystem Generator](#) block, only one register is included in the design. The clock and clock enable register signals are driven from the Domain_A domain.

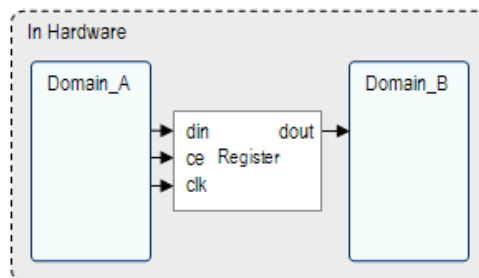

Crossing domains in this manner may be unsafe. To reduce the chance of metastability, include two Register blocks immediately following the From Register block to re-synchronize the data to the From Register's clock domain.

See Also

The following topics provide valuable insight into using and understanding the To Register block:

[From Register](#)

[Multiple Subsystem Generator](#)

[Co-Simulating Shared Registers](#)

Toolbar

This block is listed in the following Xilinx Blockset libraries: Tools and Index.




The Xilinx Toolbar block provides quick access to several useful utilities in System Generator. The Toolbar simplifies the use of the zoom feature in Simulink and adds new auto layout and route capabilities to Simulink models.

The Toolbar also houses several productivity improvement tools described below.

Block Interface

Double clicking on the Xilinx Toolbar block launches the GUI shown below.



The Toolbar can also be launched from the command line via [xlTBUtils](#), a collection of functions used by the Toolbar.

```
xlTBUtils('Toolbar');
```


Only one Toolbar GUI can be opened at a time, that is, the Toolbar GUI is a singleton. Regardless of where a Toolbar block is placed, the Toolbar will always perform actions on the current Simulink model in focus. In other words, if the Toolbar is invoked from model A, it can still be used on model B so long as model B is in focus.

Toolbar Buttons

Toolbar Buttons	Descriptions
	Undo: Cancels the most recent change applied to the model layout by the Toolbar and reverts the layout state to the one prior to this change. Can undo up to three changes.
	Reroute: Reroutes lines to enhance model readability. If lines are selected, only those lines will be rerouted. Otherwise all lines in the model will be rerouted.
	Auto Layout: Relocates blocks and reroutes lines to enhance model readability.
	Add Terms: Calls on the xlAddTerms function to add sources and sinks to the current model in focus. System Generator blocks are sourced with a System Generator constant block, while Simulink blocks are sourced with a Simulink constant block. Terminators are used as sinks.

Toolbar Buttons	Descriptions
	Help: Opens this document.
	Zoom: Allows you to get either a closer view of a portion of the Simulink model or a wider view of the model depending on the position of the slider or the value of the zoom factor. You can either position the slider or edit the Zoom Factor. The Zoom Factor is limited to be between 5 and 1000.

Toolbar Menus

Toolbar Buttons	Descriptions
Tools	
Create Plugins	Launches the System Generator Board Description Builder tool.
Inspect Selected	Opens up the Simulink Inspector with the properties of the blocks that are currently selected. This is useful when trying to set the size of several blocks, or the horizontal position of blocks drawn on a model.
Toolbar Properties	Launches the Properties Dialog Box shown in the figure below. Allows you to set parameters for the Auto Layout and Reroute tool. X and Y pitch indicate distances (in pixels) between blocks placed next to each other in the X and Y directions respectively. The toolbar uses the Simulink autorouter when Use simulink autorouter is checked. Otherwise, a direct line is drawn from source to destination. 
Help	Opens this document.

References

- 1) E.R.Gansner, E.Koutsofios, S.C.North, KVo, "A Technique for Drawing Directed Graphs", <http://www.graphviz.org/Documentation/TSE93.pdf>
- 2) The **Reroute** and **Auto Layout** buttons invoke an open source package called Graphviz. More information on this package is also available at <http://www.graphviz.org/>

See Also

[xlAddTerms](#), [xlSBDBuilder](#), [xlTBUtils](#)

Up Sample


This block is listed in the following Xilinx Blockset libraries: Basic Elements and Index.



The Xilinx Up Sample block increases the sample rate at the point where the block is placed in your design. The output sample period is $1/n$, where l is the input sample period and n is the sampling rate.


The input signal is up sampled so that within an input sample frame, an input sample is either presented at the output n times if samples are copied, or presented once with $(n-1)$ zeroes interspersed if zero padding is used.

In hardware, the Up Sample block has two possible implementations. If the Copy Samples option is selected on the block parameters dialog box, the Din port is connected directly to Dout and no hardware is expended. Alternatively, if zero padding is selected, a mux is used to switch between the input sample and inserted zeros. The corresponding circuit for the zero padding Up Sample block is shown below.

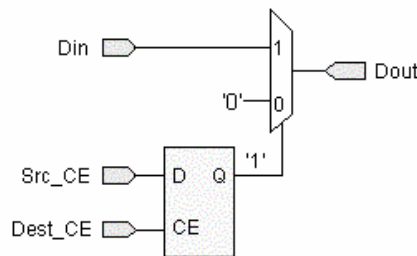

Block Interface

The Up Sample block receives two clock enable signals, Src_CE and Dest_CE. Src_CE is the clock enable signal corresponding to the input data stream rate. Dest_CE is the faster clock enable, corresponding to the output data stream rate. Notice that the circuit uses a single flip-flop in addition to the mux. The flip-flop is used to adjust the timing of Src_CE, so that the mux switches to the data input sample at the start of the input sample period, and switches to the constant zero after the first input sample. It is important to notice that the circuit has a combinational path from Din to Dout. As a result, an Up Sample block configured to zero pad should be followed by a register whenever possible.

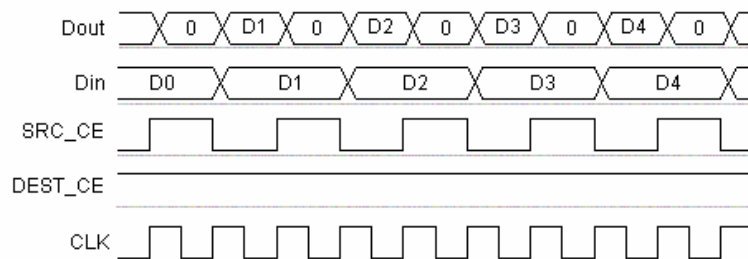

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Basic tab


Parameters specific to the Basic tab are as follows:

- **Sampling rate (number of output samples per input sample):** must be an integer with a value of 2 or greater. This is the ratio of the output sample period to the input, and is essentially a sample rate multiplier. For example, a ratio of 2 indicates a doubling of the input sample rate. If a non-integer ratio is desired, the Up Sample block can be used in combination with the Down Sample block.
- **Copy samples (otherwise zeros are inserted):** allows you to choose what to do with the additional samples produced by the increased clock rate. By selecting Copy Samples, the same sample will be duplicated (copied) during the extra sample times. If this checkbox is not selected, the additional samples are zero.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Viterbi Decoder v5_0

This block is listed in the following Xilinx Blockset libraries: Communications and Index.



Viterbi Decoder v5_0


Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.

There are two steps to the decode process. The first weighs the cost of incoming data against all possible data input combinations; either a Hamming or Euclidean metric may be used to determine the cost. The second step traces back through the trellis and determines the optimal path. The length of the trace through the trellis can be controlled by the traceback length parameter .

The decoder achieves minimal error rates when using optimal convolution codes; the table below shows various optimal codes. For correct operation, convolution codes used for encoding must match with that for decoding.

Constraint length	Optimal convolution codes for 1/2 rate (octal)	Optimal convolution codes for 1/3 rate (octal)
3	[7 5]	[7 7 5]
4	[17 13]	[17 13 15]
5	[37 33]	[37 33 25]
6	57 65]	[57 65 71]
7	[117 127]	[117 127 155]
8	[357 233]	[357 233 251]
9	[755 633]	[755 633 447]

Block Interface

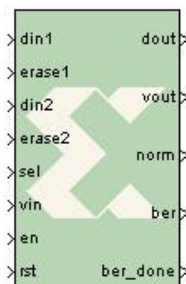

Viterbi Decoder v5_0

The Viterbi decoder supports rates from 1/2 to 1/7 and consequently displays two to seven input ports labeled din1 through din7. Hard coding requires each data input to be 1 bit wide. Soft coding allows widths to be between 3 to 8 bits (inclusive). The vin port indicates that the values presented on the din ports are valid. When using external puncturing, depending on the decoder rate, up to seven erase ports become available. If an erase pin is high, the corresponding data pins are treated as a null-symbol. For a given constraint length and traceback length, the block can function as a dual decoder, i.e. two convolution codes and two output rates. An input port labeled sel indicates the

convolution code to which the input data corresponds, when sel is 0 (respectively, 1) the data is decoded using convolution code array 1 (respectively, 2).

The Viterbi Decoder can have two to five output ports. The dout port outputs the 1 bit decoded result and vout indicates that the value is valid. The ber port gives a measurement of the bit error rate of the channel by counting the differences between the re-encoded dout and the delayed din values. The number of errors detected is divided by 8 and output on the ber port. The ber_done port indicates when the number of input samples for error count (as indicated on the mask) have been processed. The norm signal indicates when normalization has occurred within the block. The norm port gives immediate monitoring of errors on the channel. The more frequent the normalization (i.e. the norm port going high), the higher the rate of errors present.

Block Parameters

Basic tab

Parameters specific to the Basic tab are:

- **Constraint length:** Equals $n+1$, where n is the length of the constraint register in the encoder.
- **Use dual decoder:** When selected, the block behaves as a dual decoder. This makes the sel input port available.
- **Convolution code array 1 (octal):** First array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered. When dual decoding is used, a value of 0 on the sel port corresponds to this array.
- **Convolution code array 2 (octal):** Second array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered. When dual decoding is used, a value of 1 on the sel port corresponds to this array. Output rate implied by convolution code array 2 does not need to be the same as that implied from convolution code array 1.
- **Traceback length:** Length of the traceback through the Viterbi trellis. Optimal length is 5 to 7 times the constraint length.
- **Coding:** Hard or Soft: Hard encoding uses the Hamming metric to calculate costs. Soft encoding requires the Euclidean metric to calculate costs. Hard coding requires the input data be 1 bit wide, for soft coding, widths are between 2 and 8 bits. Soft coding is required for dual decoding, external puncturing, and serial architecture.
- **Data format:** Signed magnitude or Offset binary (available for soft coding only).
- **Provide bit error rate port:** When selected, ber and ber_done ports are added to the block.
- **Number of input samples for error count:** Indicates the number of input samples over which the bit error rate is calculated.
- **Provide normalization port:** When selected, the norm port is added to the block.

Advanced tab

Parameters specific to the Basic tab are:

- **Use external puncturing:** When selected, erase ports are added to the block.
- **Use best state:** When selected the traceback starts from the optimal state.

- **Width reduction:** Indicates how many of the least significant bits to ignore when saving the cost used to determine the best state.

Implementation tab

Parameters specific to the Implementation tab are:

- **Architecture type:** Parallel or Serial.
- **Optimization:** Area or Speed (available for parallel architecture only).
- **Reduce latency:** When selected the block latency is reduced by approximately 50%.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following LogiCORE™ Viterbi Decoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Viterbi Decoder v5_0	Viterbi Decoder	V5.0	•	•			•	•	•	

Viterbi Decoder v6_0

This block is listed in the following Xilinx Blockset libraries: *Communications and Index*.




Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.

There are two steps to the decode process. The first weighs the cost of incoming data against all possible data input combinations; either a Hamming or Euclidean metric may be used to determine the cost. The second step traces back through the trellis and determines the optimal path. The length of the trace through the trellis can be controlled by the traceback length parameter.

The decoder achieves minimal error rates when using optimal convolution codes; the table below shows various optimal codes. For correct operation, convolution codes used for encoding must match with that for decoding.

Constraint length	Optimal convolution codes for 1/2 rate (octal)	Optimal convolution codes for 1/3 rate (octal)
3	[7 5]	[7 7 5]
4	[17 13]	[17 13 15]
5	[37 33]	[37 33 25]
6	57 65]	[57 65 71]
7	[117 127]	[117 127 155]
8	[357 233]	[357 233 251]
9	[755 633]	[755 633 447]

Block Interface



The Viterbi decoder supports rates from 1/2 to 1/7 and consequently displays two to seven input ports labeled din1 through din7. Hard coding requires each data input to be 1 bit wide. Soft coding allows widths to be between 3 to 8 bits (inclusive). The vin port indicates that the values presented on the din ports are valid. When using external puncturing, depending on the decoder rate, up to seven erase ports become available. If an erase pin is high, the corresponding data pins are treated as a null-symbol. For a given constraint length and traceback length, the block can function as a dual decoder, i.e. two convolution codes and two output rates. An input port labeled sel indicates the

convolution code to which the input data corresponds, when `sel` is 0 (respectively, 1) the data is decoded using convolution code array 1 (respectively, 2).

The Viterbi Decoder can have two to five output ports. The `dout` port outputs the 1 bit decoded result and `vout` indicates that the value is valid. The `ber` port gives a measurement of the bit error rate of the channel by counting the differences between the re-encoded `dout` and the delayed `din` values. The number of errors detected is divided by 8 and output on the `ber` port. The `ber_done` port indicates when the number of input samples for error count (as indicated on the mask) have been processed. The `norm` signal indicates when normalization has occurred within the block. The `norm` port gives immediate monitoring of errors on the channel. The more frequent the normalization (i.e. the `norm` port going high), the higher the rate of errors present.

Block Parameters

Basic tab

Parameters specific to the Basic tab are:

- **Constraint length:** Equals $n+1$, where n is the length of the constraint register in the encoder.
- **Use dual decoder:** When selected, the block behaves as a dual decoder. This makes the `sel` input port available.
- **Convolution code array 1 (octal):** First array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered. When dual decoding is used, a value of 0 on the `sel` port corresponds to this array.
- **Convolution code array 2 (octal):** Second array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered. When dual decoding is used, a value of 1 on the `sel` port corresponds to this array. Output rate implied by convolution code array 2 does not need to be the same as that implied from convolution code array 1.
- **Traceback length:** Length of the traceback through the Viterbi trellis. Optimal length is 5 to 7 times the constraint length.
- **Coding:** Hard or Soft: Hard encoding uses the Hamming metric to calculate costs. Soft encoding requires the Euclidean metric to calculate costs. Hard coding requires the input data be 1 bit wide, for soft coding, widths are between 2 and 8 bits. Soft coding is required for dual decoding, external puncturing, and serial architecture.
- **Data format:** Signed magnitude or Offset binary (available for soft coding only).
- **Provide bit error rate port:** When selected `ber` and `ber_done` ports are added to the block.
- **Number of input samples for error count:** Indicates the number of input samples over which the bit error rate is calculated.
- **Provide normalization port:** When selected the `norm` port is added to the block.

Advanced tab

Parameters specific to the Basic tab are:

- **Use external puncturing:** When selected `erase` ports are added to the block.
- **Use best state:** When selected the traceback starts from the optimal state.

- **Width reduction:** Indicates how many of the least significant bits to ignore when saving the cost used to determine the best state.

Implementation tab

Parameters specific to the Implementation tab are:

- **Architecture type:** Parallel or Serial.
- **Optimization:** Area or Speed (available for parallel architecture only).
- **Reduce latency:** When selected, the block latency is reduced by approximately 50%.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).


Xilinx LogiCore

This block uses the following LogiCORE™ Viterbi Decoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Viterbi Decoder v6_0	Viterbi Decoder	V6.0		•	•			•	•	•

Viterbi Decoder v6_1

This block is listed in the following Xilinx Blockset libraries: Communications and Index.



Data encoded with a convolution encoder may be decoded using the Xilinx Viterbi decoder block.

There are two steps to the decode process. The first weighs the cost of incoming data against all possible data input combinations; either a Hamming or Euclidean metric may be used to determine the cost. The second step traces back through the trellis and determines the optimal path. The length of the trace through the trellis can be controlled by the traceback length parameter.

The decoder achieves minimal error rates when using optimal convolution codes; the table below shows various optimal codes. For correct operation, convolution codes used for encoding must match with that for decoding.

Constraint length	Optimal convolution codes for 1/2 rate (octal)	Optimal convolution codes for 1/3 rate (octal)
3	[7 5]	[7 7 5]
4	[17 13]	[17 13 15]
5	[37 33]	[37 33 25]
6	57 65]	[57 65 71]
7	[117 127]	[117 127 155]
8	[357 233]	[357 233 251]
9	[755 633]	[755 633 447]

This block supports Spartan™-3A DSP as well as the following previously-supported technologies: Virtex™-II, Virtex-II Pro, Virtex-4, Virtex-5, Spartan™-3, Spartan-3A/3AN, and Spartan-3E

Block Interface



The Viterbi decoder supports rates from 1/2 to 1/7 and consequently displays two to seven input ports labeled din1 through din7. Hard coding requires each data input to be 1 bit wide. Soft coding allows widths to be between 3 to 8 bits (inclusive). The vin port indicates that the values presented on the din ports are valid. When using external

puncturing, depending on the decoder rate, up to seven erase ports become available. If an erase pin is high, the corresponding data pins are treated as a null-symbol. For a given constraint length and traceback length, the block can function as a dual decoder, i.e. two convolution codes and two output rates. An input port labeled `sel` indicates the convolution code to which the input data corresponds, when `sel` is 0 (respectively, 1) the data is decoded using convolution code array 1 (respectively, 2).

The Viterbi Decoder can have two to five output ports. The `dout` port outputs the 1 bit decoded result and `vout` indicates that the value is valid. The `ber` port gives a measurement of the bit error rate of the channel by counting the differences between the re-encoded `dout` and the delayed `din` values. The number of errors detected is divided by 8 and output on the `ber` port. The `ber_done` port indicates when the number of input samples for error count (as indicated on the mask) have been processed. The `norm` signal indicates when normalization has occurred within the block. The `norm` port gives immediate monitoring of errors on the channel. The more frequent the normalization (i.e. the `norm` port going high), the higher the rate of errors present.

Block Parameters

Basic tab

Parameters specific to the Basic tab are:

- **Constraint length:** Equals $n+1$, where n is the length of the constraint register in the encoder.
- **Use dual decoder:** When selected, the block behaves as a dual decoder. This makes the `sel` input port available.
- **Convolution code array 1 (octal):** First array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered. When dual decoding is used, a value of 0 on the `sel` port corresponds to this array.
- **Convolution code array 2 (octal):** Second array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered. When dual decoding is used, a value of 1 on the `sel` port corresponds to this array. Output rate implied by convolution code array 2 does not need to be the same as that implied from convolution code array 1.
- **Traceback length:** Length of the traceback through the Viterbi trellis. Optimal length is 5 to 7 times the constraint length.
- **Coding:** Hard or Soft: Hard encoding uses the Hamming metric to calculate costs. Soft encoding requires the Euclidean metric to calculate costs. Hard coding requires the input data be 1 bit wide, for soft coding, widths are between 2 and 8 bits. Soft coding is required for dual decoding, external puncturing, and serial architecture.
- **Data format:** Signed magnitude or Offset binary (available for soft coding only).
- **Provide bit error rate port:** When selected `ber` and `ber_done` ports are added to the block.
- **Number of input samples for error count:** Indicates the number of input samples over which the bit error rate is calculated.
- **Provide normalization port:** When selected the `norm` port is added to the block.

Advanced tab

Parameters specific to the Basic tab are:

- **Use external puncturing:** When selected erase ports are added to the block.
- **Use best state:** When selected the traceback starts from the optimal state.
- **Width reduction:** Indicates how many of the least significant bits to ignore when saving the cost used to determine the best state.

Implementation tab

Parameters specific to the Implementation tab are:

- **Architecture type:** Parallel or Serial.
- **Optimization:** Area or Speed (available for parallel architecture only).
- **Reduce latency:** When selected, the block latency is reduced by approximately 50%.

Parameters used by this block are explained in the topic [Common Options in Block Parameters Dialog Boxes](#).

Xilinx LogiCore

This block uses the following LogiCORE™ Viterbi Decoder.

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Viterbi Decoder v6_1	Viterbi Decoder	V6.0		•	•	•		•	•	•

WaveScope

This block is listed in the following Xilinx Blockset libraries: *Tools and Index*.




The System Generator WaveScope block provides a powerful and easy-to-use waveform viewer for analyzing and debugging System Generator designs.


The viewer allows you to observe the time-changing values of any wires in the design after the conclusion of the simulation. The signals may be formatted in a logic or analog format and may be viewed in binary, hex, or decimal radices.

Quick Tutorial

The following is a simple example to show how to use the WaveScope with this simple model:

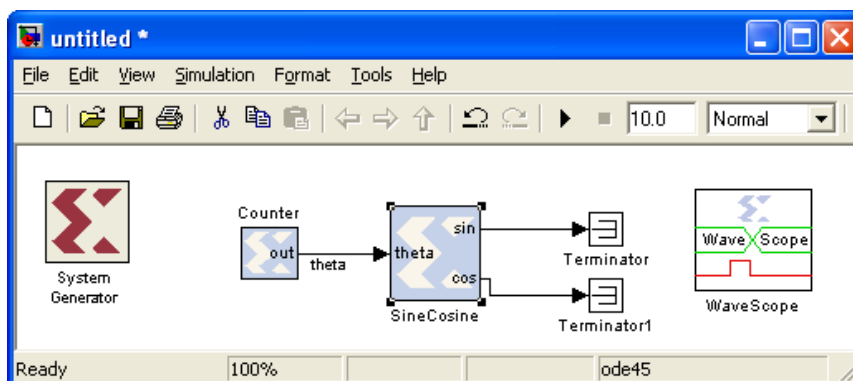


Note that the WaveScope block has been dropped into the model. You double-click on the WaveScope block to open it, which brings up the blank waveform viewer. Now you can highlight the three wires in the model by clicking on all three wires while holding down the **Shift** key. you then push the **Add Selected Nets**  button in the waveform viewer to add those wires to the viewer. The WaveScope window now appears as shown:

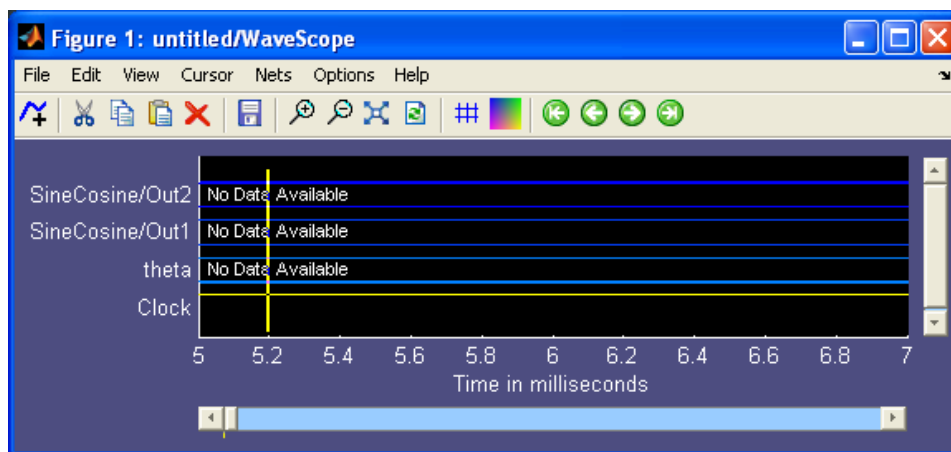


The three signals appear in the viewer. Two of the signals have been automatically named because they were not explicitly named in the model. Now you run the simulation using the **Start**  button on the model's window. This simulation has a period of 1s and runs for


10s. The waveform viewer automatically updates. You can zoom out to the full view using the  button and the viewer appears as shown:

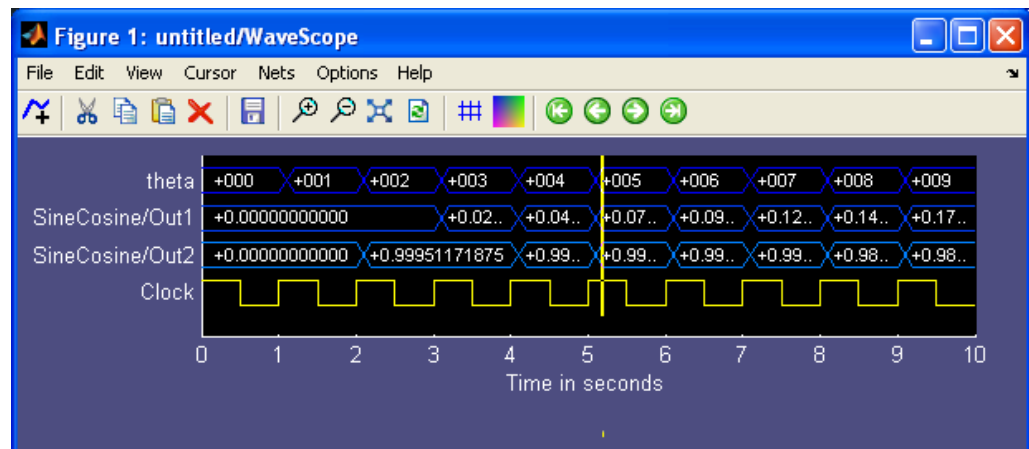


You can change the radix of the signal 'theta' to hex. You click on the name 'theta' or the associated signal waveform to highlight it, then double-click on the highlighted signal (not on the name) to bring up the formatting menu:

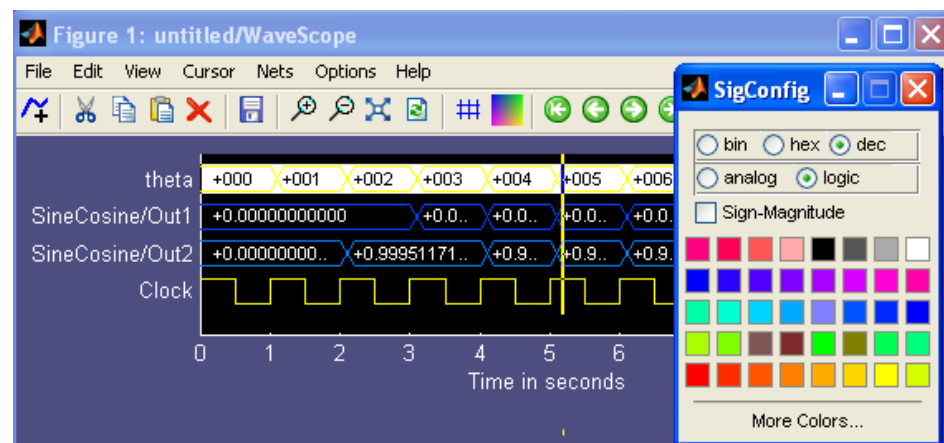

You select the **hex** radio button to format 'theta' as **binary**. In a similar fashion, you can format the signal 'SineCosine/Out1' as **analog** and change the color to **red**:

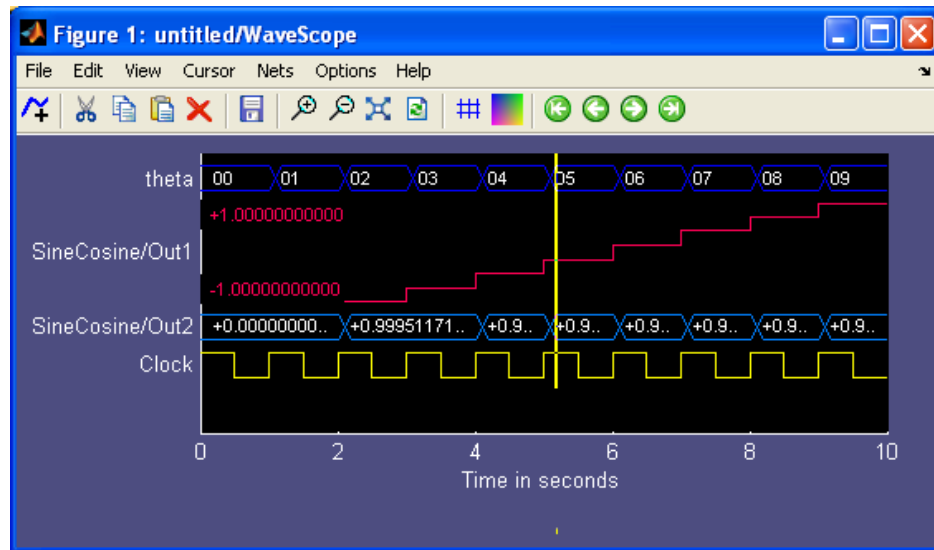


You can now change the names of the signals by double-clicking on the signal names and entering new names in the text box:

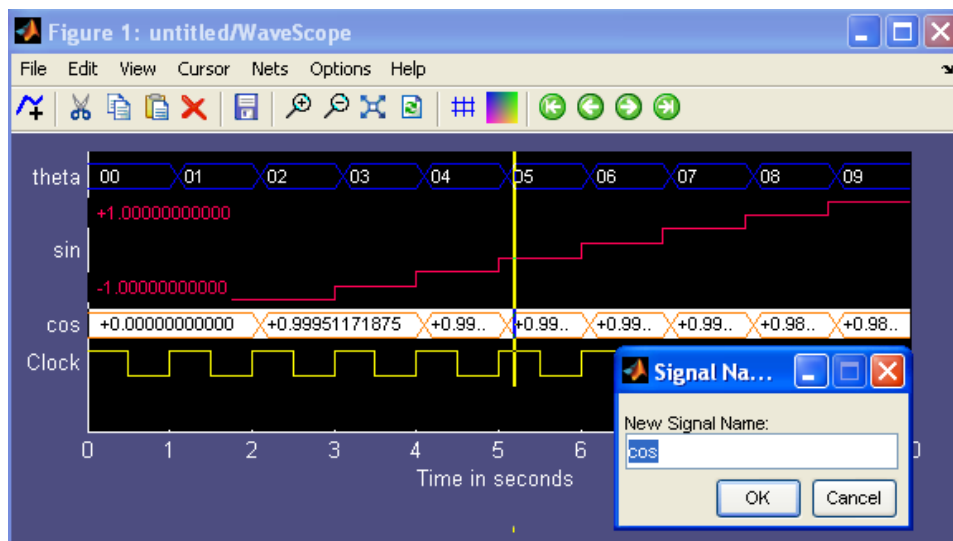

The new signal names are displayed in the model. By using the  button, you can zoom in on a portion of the simulation. You can bring the yellow cursor to the center of the screen

using the **Cursor > Center Cursor** menu option and observe the value for any signal under the cursor by placing the mouse pointer on the cursor:

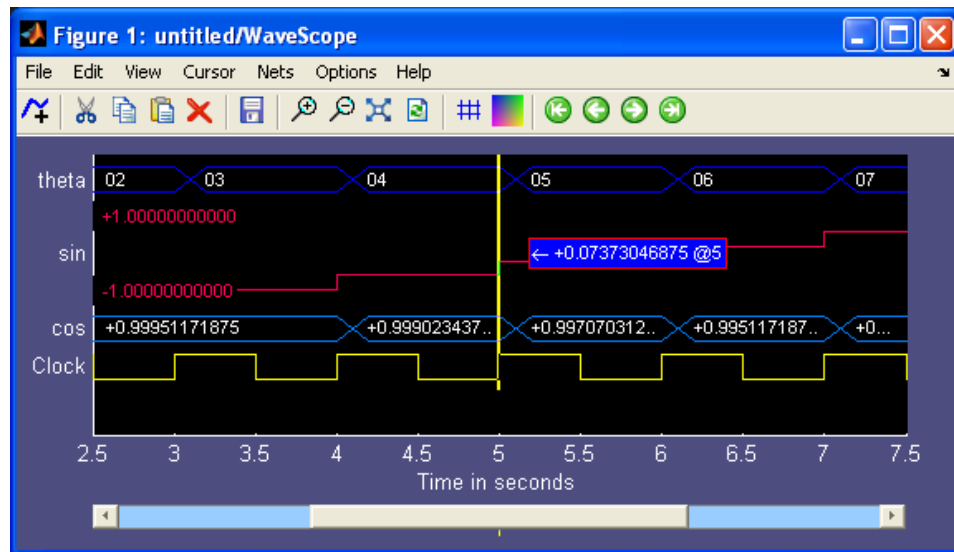

Block Interface

Double-clicking the WaveScope icon opens up the WaveScope window. If the WaveScope window is closed, it will open automatically at the end of a simulation. The WaveScope window is a powerful "scope" in which the simulation results may be displayed in several ways.

WaveScope displays the signal on a given net or nets. The signal can be viewed in more than one way simultaneously, for example, viewing it both in logical and analog formats. Each signal can be displayed either as logic or analog, and the values can be displayed in hexadecimal, binary, or decimal radices. At the bottom of the display is the clock signal for reference.

The WaveScope window can be used to

- Choose which nets' signals to view
- Configure the signals' presentation
- View the signals

Selecting Nets

There are two ways to select nets to view in the WaveScope window. Select any output net(s) of a Xilinx block (or the blocks themselves) in the Simulink window, then press the  icon in the WaveScope toolbar ("Add selected nets"). Multiple blocks/nets may be selected by holding the 'shift' key while selecting. The signal for the selected net(s) will appear in the WaveScope window. For any blocks that were selected, all of the inputs and outputs to the selected blocks will be added to the WaveScope window. There will be no data for the WaveScope to display until the model is simulated. After simulation, the data will appear in the WaveScope window.

Pressing the **Add Selected Nets** button in the tool bar multiple times will display the signal in the WaveScope viewer multiple times.

The second method of choosing nets is to use the "Nets" menu. This contains a hierarchical list of blocks and nets in your model. In a complex diagram it may be easier to use this menu to navigate to a particular net.

At the bottom of the display you will see a clock signal representing the highest rate clock in the design. This signal is always displayed whenever any signal is displayed.

Selecting and Moving Signals

Click on a signal or the corresponding net name with the left mouse button to select the signal. Once a signal has been selected it can be moved in the display by dragging it to a different location. If you wish to select several signals at once, use Shift-click or Control-click on the *net names* only; it will not work with the signals themselves.

If you select multiple signals, which need not be contiguous signals in the display, and move them in the display, they will all be moved to a contiguous block of signals. This is handy for displaying several related signals together so they can all be seen at once.

You cannot select or move the clock signal in the WaveScope display. The clock signal will always be the last signal displayed.

Deleting Signals from the WaveScope Window

If you decide not to view a signal after adding it to the WaveScope window, just select the signal and press the **Delete Signals** button on the toolbar. The del key is the keyboard shortcut to this function, and the Edit menu provides a "Delete" item as well.

The standard **Cut**, **Copy** and **Paste** functions are available for signals as well. Using the Copy and Paste icons on the toolbar, keyboard shortcuts **Control-X** for cut, **Control-C** for copy and **Control-V** for paste, or the **Copy** and **Paste** entries in the **Edit** menu, allows you to display a net multiple times in the WaveScope display.


You cannot copy, paste, or delete the clock signal from the WaveScope display.

Configuring the Signals' Presentation

Some signals are naturally viewed as numerical values in which the value is of primary concern, and some as logical states in which the transition is the key datum. With WaveScope you can choose which way to view the signal.

Select the signal(s) in question, then double-click on the signal. (Double-click on the signal itself, not on the signal's name.) A menu will appear with four choices:

- **Format** – Select "logic" to show the signal as a logical signal with transitions emphasized. The value is written after each transition. Select "analog" to display the signal as a graph of the value. The high and low values for the signal are displayed in the left of the graph as well. The size of the analog signal may be changed by dragging the bottom of the selected analog signal.
- **Radix** – Select "hex," "binary" or "dec" to choose the radix of the displayed numbers. Numbers will always be displayed with the proper radix point. For example, the decimal number 10.5 would be displayed as A.8 in hex.
- **Sign-Magnitude** - Select "Sign-Magnitude" to have WaveScope interpret the values as a sign-magnitude rather

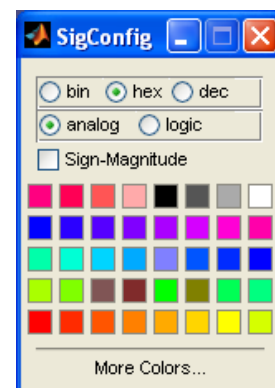

than a two's complement number. Decimal values are always displayed in sign-magnitude format.


- **Color** – WaveScope chooses a default value for a color. Use a colored button to select a new color for all the selected signals.

A logic signal will, by default, have the values displayed in the graph. To turn this off, unselect the **Show values** item in the **Options** menu.

You cannot change the clock signal's presentation.

Changing the Height of an Analog Signal

To change the size of the analog signal, grab the bottom edge of a selected analog signal (as shown) and move the bottom up or down to make the analog signal smaller or bigger, respectively:

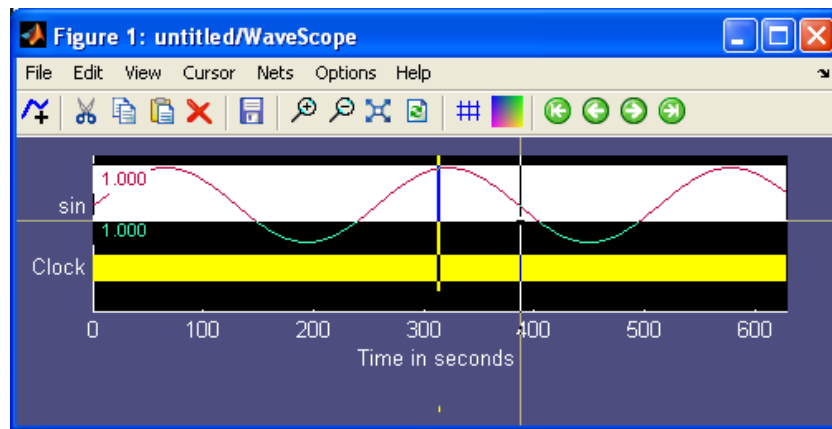

Changing the Signal Name

Double-click on a signal's name to change it. You may also change the name on the wire in the model. In this case when the simulation is re-run or the WaveScope window is refreshed using the  button, the signal name will be updated in the WaveScope window.

Rainbowing the Signals

It is easier to observe signals when they are separated in the visual spectrum. As signals are added, a new color is selected from a rainbow palette. A group of signals may be re-

rainbowed by selecting a group of signals and pushing the rainbow button. To re-rainbow all of the signals, select them all using Control-A and push the rainbow button:



Viewing the Signals

Once you have selected the signals and simulated the model, WaveScope starts displaying the signals.

Zooming and Scrolling

You can zoom in and out with either the magnifying glass icons, the view menu, or the 'i' and 'o' keys on your keyboard. You may also zoom to a box by dragging a rubberband box in the WaveScope window. Arrow keys will scroll the display, or you can use your mouse in the sliders at the right and below the signal display. Note that when there is sufficient room to display the signals in one dimension or the other, the sliders will not display.

The control key allows for finer-resolution zooming and panning. Holding down the control key while pushing the left and right arrow keys will pan by one clock cycle. Holding down the control keys in conjunction with the 'i' and 'o' keys will zoom in and out by a smaller factor.

Changing the Recording Limits

There are times when you may want to display only a subset of your data. For instance, your simulation may run for a long time, but you are only interested in looking at the last 1000 steps of the simulation.

The more data that is displayed in the WaveScope, the slower the WaveScope will be. One possibility is to zoom in on the desired data, but if there is a lot of data the WaveScope will still be slow. In this case a better solution is to reduce the Recording Limits of the WaveScope.

By default, WaveScope records all the values on a signal from start of a simulation to the finish. You can change these limits by using the **Options** menu and selecting the **Recording Limits** submenu. A dialog will open in which you can set the start and ending time for recording. As shown below, the dialog is pre-populated with the current lowest


and highest value. You can enter any number here. The end time can be set to "Inf", as well, indicating no preset upper limit.



Once the recording limits are set, the WaveScope will only display values in that time range. You cannot zoom back out of that range. When you rerun the simulation, only the values at times in that range are recorded.

The Grid

Displaying the Grid  – As shown below, clicking the "Toggle Grid" icon on the toolbar will display vertical lines at each labeled x-axis value.

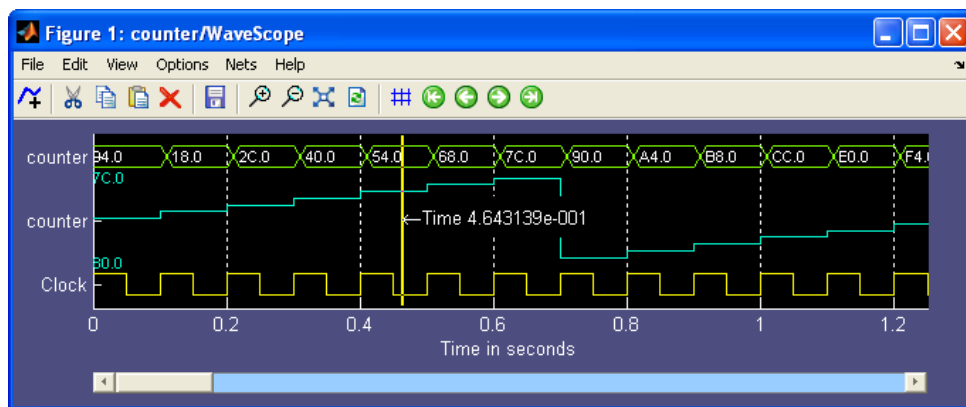


The Cursor

The cursor is helpful for visually aligning signals or marking a point of interest. The cursor may be brought to the currently-viewed time span by clicking underneath the time axis. When moving the pointer underneath the time axis, the mouse pointer changes to a cross, indicating that the cursor may be moved to that location and moved around within the current view.

The cursor may also be brought to the center of the screen using the 'c' key or the **Cursor > Center Cursor** menu option. Once on-screen, the cursor may be moved around by dragging it. When the mouse pointer is placed over the cursor, the pointer will change to a cross to show it may be dragged.

When the mouse pointer is over the cursor, a tool tip shows the value of the signal underneath the mouse pointer. This is valuable for displaying the value of an analog signal

or the full value of a logical signal when the zoom factor is such that the full value cannot be displayed on the signal:

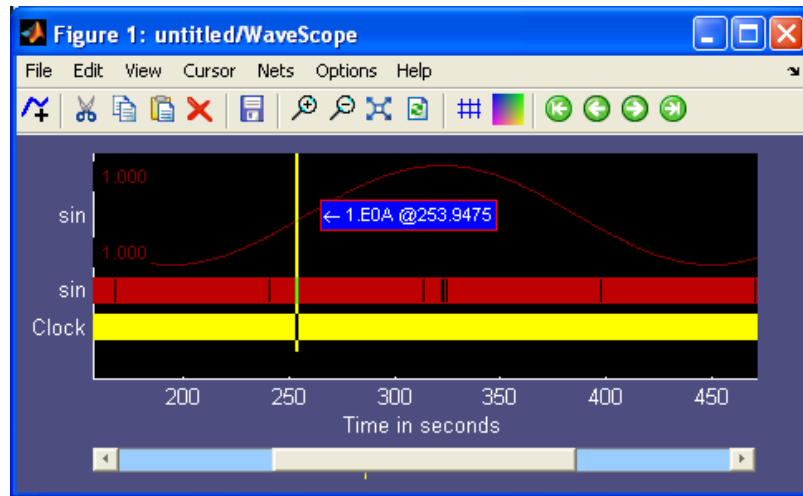


As the cursor is dragged, the tool tip will be updated. Note the mini-cursor underneath the scroll bar, which appears as a yellow tick mark. When the cursor is not in the selected view, the mini-cursor shows where the cursor resides on the time axis. To jump to the current cursor location, use the 'j' key or the **Cursor > Jump to Cursor** menu option.

It is often helpful to be able to jump to the next signal transition without having to pan and search for the transition. To jump to the next transition, place the cursor on the screen and select the signal of interest. Press 'enter' or use the **Cursor > Move Cursor Next** menu option to move the cursor to the next signal transition. If the cursor moves off screen the view will be panned to keep the cursor on screen.

Crossprobing

When a signal(s) is selected in the WaveScope window, it is cross-probed by highlighting the corresponding wire in the model in orange, as shown here:

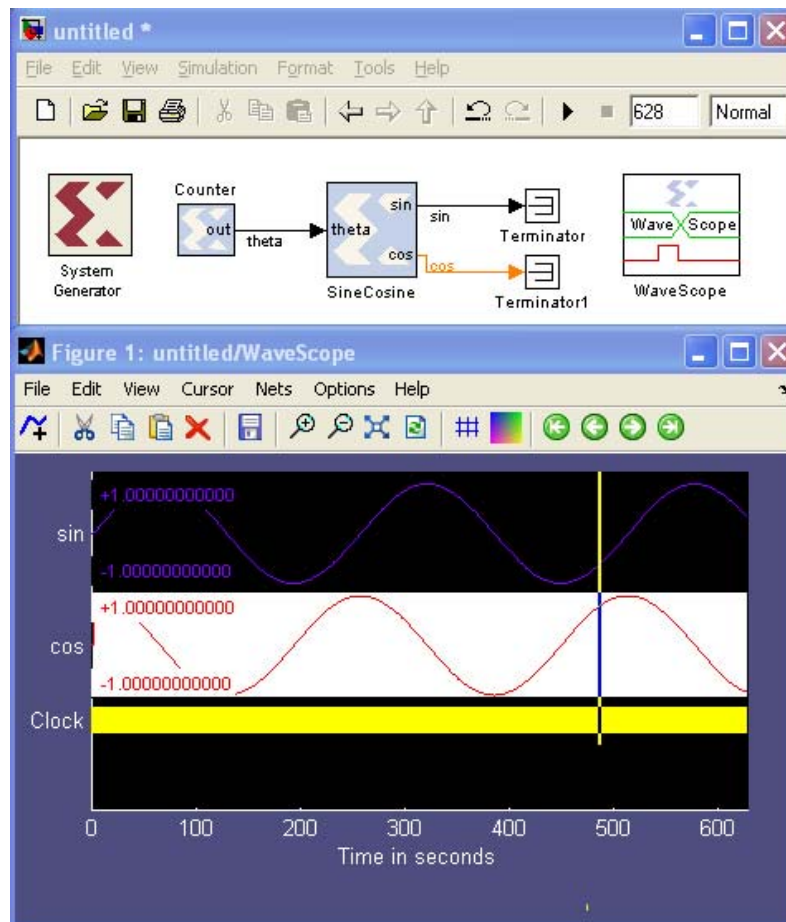

If the highlighted signal is underneath some layers of hierarchy, the appropriate mother blocks will be highlighted in orange.

The Cursor Menu

There are four options in the cursor menu.

Center Cursor

This option will bring the cursor to the center of the currently-viewed time span. This action may also be performed with the 'c' key.

Jump to Cursor

This option moves the current view to the cursor's location. This action may also be performed with the 'j' key.

Move Cursor Next

This option moves the cursor to the next transition of the most recent of the currently-selected signals. This action may also be performed with the 'enter' key.

Move Cursor Last

This option moves the cursor to the previous transition of the most recent of the currently-selected signals. This action may also be performed with shift-enter.

The Options Menu

There are four options in the options menu.

Grid Lines

This option toggles display of the time grid.

Show Values

Show Values toggles the display of numerical values on the WaveScope. By default, WaveScope will display values. Turn off the display with this option.

Run at End of Sim

This option toggles whether the WaveScope should run at the end of a simulation. By default, the WaveScope will display. If you don't want the WaveScope to appear at the end of simulation, use this option

Recording Limits

As explained above in Changing the Recording Limits, this option is used to restrict the simulation time displayed in the WaveScope.

Xilinx LogiCORE Versions

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
Accumulator	Accumulator	V7.0	•	•			•	•	•	
	Accumulator	V9.1			•	•				•
Addressable Shift Register	RAM-based Shift Register	V7.0	•	•			•	•	•	
	RAM-based Shift Register	V9.1			•	•				•
AddSub	Adder Subtractor	V7.0	•	•			•	•	•	
	Adder Subtractor	V9.1			•	•				•
CIC Compiler 1.1	CIC Compiler v1.1	V1.1		•	•	•		•	•	•
CMult	Multiplier	V7.0	•	•			•	•	•	
	Multiplier	V10.0			•	•				•
Convolutional Encoder v3_0	Convolutional Encoder	V3.0	•	•			•	•		
Convolutional Encoder v6_0	Convolutional Encoder	V6.0		•				•	•	•
Convolutional Encoder v6_1	Convolutional Encoder	V6.0		•	•	•		•	•	•
Counter	Binary Counter	V7.0	•	•			•	•	•	
	Binary Counter	V9.1			•	•				•
DAFIR v9_0	Distributed Arithmetic FIR Filter	V9.0	•	•			•	•	•	
DDS Compiler v1_1	DDS Compiler v1_1	V4.1	•				•	•		
DDS Compiler v2_0	DDS Compiler v2_0	V4.1	•				•	•		
DDS v4_0	DDS	V4.1	•				•	•		
DDS v5_0	DDS	V5.0	•	•			•	•	•	

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device			3A DSP	Virtex™ Device			
			2,2E	3,3E	3A		1,E	2,2P	4	5
Dual Port RAM	Dual Port Block Memory	V6.1	•	•			•	•	•	
	Block Memory Generator	V2.4			•	•				•
	Distributed Memory	V7.1	•	•			•	•	•	
	Distributed Memory Generator	V3.3			•	•				•
FFT v1_0	16 Pt Complex Fast Fourier Transform	V1.0					•			
	64 Pt Complex Fast Fourier Transform	V1.0					•			
	256 Pt Complex Fast Fourier Transform	V1.0					•			
	1024 Pt Complex Fast Fourier Transform	V1.0					•			
FFT v3_1	Fast Fourier Transform	V3.1		•				•	•	
FFT v3_2	Fast Fourier Transform	V3.2		•				•	•	
FFT v4_1	Fast Fourier Transform	V4.1		•	•	•		•	•	•
FIFO	Synchronous FIFO	V5.0	•	•			•	•	•	
	FIFO Generator	V3.3			•	•				•
FIR Compiler v1_0	FIR Compiler	V1.0							•	
FIR Compiler v2_0	FIR Compiler	V2.0							•	•
FIR Compiler v3_0	FIR Compiler	V3.0				•			•	•
FIR Compiler v3_1	FIR Compiler	V3.0				•			•	•

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
FIR Compiler v3_2	FIR Compiler	V3.2				•			•	•
From FIFO	FIFO Generator	V3.3	•	•	•	•	•	•	•	•
Interleaver Deinterleaver v4_0	Interleaver/De-Interleaver	V4.0	•	•			•	•	•	
Interleaver Deinterleaver v5_0	Interleaver/De-Interleaver	V5.0	•	•			•	•	•	
Mult	Multiplier	V9.0	•	•	•	•	•	•	•	•
Reed-Solomon Decoder 6.1	Reed-Solomon Decoder	V6.0		•	•	•		•	•	•
Reed-Solomon Encoder 6.1	Reed-SolomonS Encoder	V6.0		•	•	•		•	•	•
ROM	Single Port Block Memory	V6.1	•	•			•	•	•	
	Block Memory Generator	V2.4			•	•				•
	Distributed Memory	V7.1	•	•			•	•	•	
	Distributed Memory Generator	V3.3			•	•				•
RS Decoder v5_1	RS Decoder	V5.1	•	•			•	•	•	
RS Decoder v6_0	RS Decoder	V6.0		•	•			•	•	•
RS Encoder v5_0	RS Encoder	V5.0	•	•			•	•	•	
RS Encoder v6_0	RS Encoder	V6.0		•				•	•	•
SineCosine	Sine Cosine	V5.0	•	•			•	•	•	

System Generator Block	Xilinx LogiCORE™	LogiCORE™ Version / Data Sheet	Spartan™ Device				Virtex™ Device			
			2,2E	3,3E	3A	3A DSP	1,E	2,2P	4	5
Single Port RAM	Single Port Block Memory	V6.1	•	•			•	•	•	
	Block Memory Generator	V2.4			•	•				•
	Distributed Memory	V7.1	•	•			•	•	•	
	Distributed Memory Generator	V3.3			•	•				•
To FIFO	FIFO Generator	V4.2	•	•	•	•	•	•	•	•
Viterbi Decoder v5_0	Viterbi Decoder	V5.0	•	•			•	•	•	
Viterbi Decoder v6_0	Viterbi Decoder	V6.0		•	•			•	•	•
Viterbi Decoder v6_1	Viterbi Decoder	V6.0		•	•	•		•	•	•

Xilinx Reference Blockset

The following reference libraries are provided:

Communication

Communication Reference Designs

- [BPSK AWGN Channel](#)
- [Convolutional Encoder](#)
- [Multipath Fading Channel Model](#)
- [White Gaussian Noise Generator](#)

Control Logic

Control Logic Reference Designs

- [Mealy State Machine](#)
- [Moore State Machine](#)
- [Registered Mealy State Machine](#)
- [Registered Moore State Machine](#)

DSP

DSP Reference Designs

- [2 Channel Decimate by 2 MAC FIR Filter](#)
- [2n+1-tap Linear Phase MAC FIR Filter](#)
- [2n-tap Linear Phase MAC FIR Filter](#)
- [2n-tap MAC FIR Filter](#)
- [4-channel 8-tap Transpose FIR Filter](#)

DSP Reference Designs[4n-tap MAC FIR Filter](#)[CIC Filter](#)[Dual Port Memory Interpolation MAC FIR Filter](#)[Interpolation Filter](#)[m-channel n-tap Transpose FIR Filter](#)[n-tap Dual Port Memory MAC FIR Filter](#)[n-tap MAC FIR Filter](#)


Imaging

Imaging Reference Designs[5x5Filter](#)[Virtex Line Buffer](#)[Virtex2 5 Line Buffer](#)[Virtex2 Line Buffer](#)

Math

Math Reference Designs[CORDIC ATAN](#)[CORDIC DIVIDER](#)[CORDIC LOG](#)[CORDIC SINCOS](#)[CORDIC SQRT](#)

2 Channel Decimate by 2 MAC FIR Filter



The Xilinx n-tap 2 Channel Decimate by 2 MAC FIR Filter reference block implements a multiply-accumulate-based FIR filter. One dedicated multiplier and one Dual Port Block RAM are used in the n-tap filter. The same MAC engine is used to process both channels that are time division multiplexed (TDM) together. Completely different coefficient sets can be specified for each channel as long as they have the same number of coefficients. The filter also provides a fixed decimation by 2 using a polyphase filter technique. The filter configuration helps illustrate techniques for storing multiple coefficient sets and data samples in filter design. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. The filter design takes advantage of these silicon features by implementing a design that is compact and resource efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Data Input Bit Width:** Width of input sample.
- **Data Input Binary Point:** Binary point location of input.
- **Coefficient Vector (Ch.1):** Specify coefficients for Channel 1 of the filter. Number of taps is inferred from size of coefficient vector.
- **Coefficient Vector (Ch.2):** Specify coefficients for Channel 2 of the filter. Number of taps is inferred from size of coefficient vector.
Note: Coefficient Vectors must be the same size. Pad coefficients if necessary to make them the same size.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point per Coefficient:** Binary point location for each coefficient.
Note: Coefficient Vectors must be the same size. Pad coefficients if necessary to make them the same size.
- **Sample Period:** Sample period of input

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438

2n+1-tap Linear Phase MAC FIR Filter



architectures.

The Xilinx 2n+1-tap Linear Phase MAC FIR Filter reference block implements a multiply-accumulate-based FIR filter. The 2n+1-tap Linear Phase MAC FIR filter exploits coefficient symmetry for an odd number of coefficients to increase filter throughput. These filter designs exploit silicon features found in Virtex family FPGAs such as dedicated circuitry for building fast, compact adders, multipliers, and flexible memory

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point for Coefficient:** Binary point location for each coefficient.
- **Number of Bits per Input Sample:** Width of input sample.
- **Binary Point for Input Samples:** Binary point location of input.
- **Input Sample Period:** Sample period of input.

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438.

2n-tap Linear Phase MAC FIR Filter



The Xilinx 2n-tap linear phase MAC FIR filter reference block implements a multiply-accumulate-based FIR filter. The block exploits coefficient symmetry for an even number of coefficients to increase filter throughput. These filter designs exploit silicon features found in Virtex family FPGAs such as dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point for Coefficient:** Binary point location for each coefficient.
- **Number of Bits per Input Sample:** Width of input sample.
- **Binary Point for Input Samples:** Binary point location of input.
- **Input Sample Period:** Sample period of input.

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438.

2n-tap MAC FIR Filter



The Xilinx 2n-tap MAC FIR Filter reference block implements a multiply-accumulate-based FIR filter. One, two, and four Virtex-II dedicated multipliers are used in the n-tap, the 2n-tap, and the 4n-tap filters, respectively. The three filter configurations help illustrate the tradeoffs between filter throughput and device resource consumption. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. Each filter design takes advantage of these silicon features by implementing a design that is compact and resource efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point for Coefficient:** Binary point location for each coefficient.
- **Number of Bits per Input Sample:** Width of input sample.
- **Binary Point for Input Samples:** Binary point location of input.
- **Input Sample Period:** Sample period of input.

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438.

4-channel 8-tap Transpose FIR Filter



The Xilinx 4-channel 8-tap Transpose FIR Filter reference block implements a 4-channel 8-tap transpose FIR filter. The transpose structure is well suited for data path processing in Xilinx FPGAs, and is easily extended to produce larger filters (space accommodating). The filter takes advantage of silicon features found in the Virtex family FPGAs such as dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point for Coefficient:** Binary point location for each coefficient.
- **Number of Bits per Input Sample:** Width of input sample.
- **Binary Point for Input Samples:** Binary point location of input.
- **Input Sample Period:** Sample period of input.

4n-tap MAC FIR Filter



The Xilinx 4n-tap MAC FIR Filter reference block implements a multiply-accumulate-based FIR filter. One, two, and four Virtex-II dedicated multipliers are used in the n-tap, the 2n-tap, and the 4n-tap filters, respectively. The three filter configurations help illustrate the tradeoffs between filter throughput and device resource consumption. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. Each filter design takes advantage of these silicon features by implementing a design that is compact and resource efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point for Coefficient:** Binary point location for each coefficient.
- **Number of Bits per Input Sample:** Width of input sample.
- **Binary Point for Input Samples:** Binary point location of input.
- **Input Sample Period:** Sample period of input.

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438.

5x5Filter



The Xilinx 5x5 Filter reference block is implemented using 5 n-tap MAC FIR Filters. The filters can be found in the DSP library of the Xilinx Reference Blockset.

Nine different 2-D filters have been provided to filter grayscale images. The filter can be selected by changing the mask parameter on the 5x5 Filter block. The 2-D filter coefficients are stored in a block RAM, and the model makes no specific optimizations for these coefficients. You can substitute your own coefficients and scale factor by modifying the mask of the 5x5 filter block, under the Initialization tab.

The coefficients used are shown below for the 9 filters. The output of the filter is multiplied by the scale factor named <filter name>Div.

```
edge = [ 0  0  0  0 0; ...
        0 -1 -1 -1 0; ...
        0 -1 -1 -1 0; ...
        0  0  0  0 0];
edgeDiv = 1;
```

```
sobelX = [ 0  0  0  0 0; ...
          0 -1  0  1 0; ...
          0 -2  0  2 0; ...
          0 -1  0  1 0; ...
          0  0  0  0 0];
sobelXDiv = 1;
```

```
sobelY = [ 0  0  0  0 0; ...
          0  1  2  1 0; ...
          0  0  0  0 0; ...
          0 -1 -2 -1 0; ...
          0  0  0  0 0];
sobelYDiv = 1;
```

```
sobelXY = [ 0  0  0  0 0; ...
            0  0 -1 -1 0; ...
            0  1  0 -1 0; ...
            0  1  1  0 0; ...
            0  0  0  0 0];
sobelXYDiv = 1;
```

```
blur = [ 1  1  1  1 1; ...
        1  0  0  0 1; ...
        1  0  0  0 1; ...
        1  0  0  0 1; ...
        1  1  1  1 1];
blurDiv = 1/16;
```

```
smooth = [ 1  1  1  1 1; ...
           1  5  5  5 1; ...
           1  5 44  5 1; ...
           1  5  5  5 1; ...
           1  1  1  1 1];
smoothDiv = 1/100;
```

```

sharpen = [ 0  0  0  0 0; ...
0 -2 -2 -2 0; ...
0 -2 32 -2 0; ...
0 -2 -2 -2 0; ...
0  0  0  0 0];
sharpenDiv = 1/16;

gaussian = [1 1 2 1 1; ...
1 2 4 2 1; ...
2 4 8 4 2; ...
1 2 4 2 1; ...
1 1 2 1 1];
gaussianDiv = 1/52;

identity = [ 0  0  0  0 0; ...
0  0  0  0 0; ...
0  0  1  0 0; ...
0  0  0  0 0; ...
0  0  0  0 0];
identityDiv = 1;

```

This filter occupies 309 slices, 5 dedicated multipliers, and 5 block rams of a Xilinx xc2v250-6 part and operates at 213 MHz (advanced speeds files 1.96, ISE™ 4.2.01i software).

The underlying 5-tap MAC FIR filters are clocked 5 times faster than the input rate. Therefore the throughput of the design is 213 MHz / 5 = 42.6 million pixels/ second. For a 64x64 image, this is $42.6 \times 10^6 / (64 \times 64) = 10,400$ frames/sec. For a 256x256 image the throughput would be 650 frames /sec, and for a 512x512 image it would be 162 frames/sec.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **5x5 Mask:** The coefficients for an Edge, Sobel X, Sobel Y, Sobel X-Y, Blur, Smooth, Sharpen, Gaussian, or Identity filter can be selected.
- **Sample Period:** The sample period at which the input signal runs at is required

BPSK AWGN Channel




The Xilinx BPSK AWGN Channel reference block adds scaled white Gaussian noise to an input signal. The noise is created by the [White Gaussian Noise Generator](#) reference block.

The noise is scaled based on the SNR to achieve the desired noise variance, as shown below. The SNR is defined as (E_b/N_0) in dB for uncoded BPSK with unit symbol energy ($E_s = 1$). The SNR input is UFix8_4 and the valid range is from 0.0 to 15.9375 in steps of 0.0625dB.

To use the AWGN in a system with coding and/or to use the core with different modulation formats, it is necessary to adjust the SNR value to accommodate the difference in spectral efficiency. If we have BPSK modulation with rate 1/2 coding and keep $E_s = 1$ and N_0 constant, then $E_b = 2$ and $E_b/N_0 = \text{SNR} + 3 \text{ dB}$. If we have uncoded QPSK modulation with $I = +/-1$ and $Q = +/-1$ and add independent noise sequences, then each channel looks like an independent BPSK channel and the $E_b/N_0 = \text{SNR}$. If we then add rate 1/2 coding to the QPSK case, we have $E_b/N_0 = \text{SNR} + 3 \text{ dB}$.

The overall latency of the AWGN Channel is 15 clock cycles. Channel output is a 17 bit signed number with 11 bits after the binary point. The input port snr can be any type. The reset port must be Boolean and the input port din must be of unsigned 1-bit type with binary point position at zero.

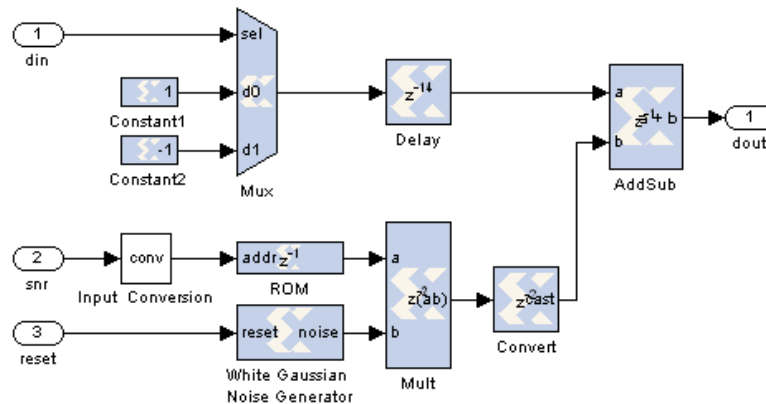


Block Parameters

The block parameter is the decimal starting seed value.

Reference

- [1] A. Ghazel, E. Boutillon, J. L. Danger, G. Gulak and H. Laamari, *Design and Performance Analysis of a High Speed AWGN Communication Channel Emulator*, IEEE PACRIM Conference, Victoria, B. C., Aug. 2001.
- [2] Xilinx Data Sheet: *Additive White Gaussian Noise (AWGN) Core v1.0*, Xilinx, Inc. October 2002

CIC Filter



Cascaded integrator-comb (CIC) filters are multirate filters used for realizing large sample rate changes in digital systems. Both decimation and interpolation structures are supported. CIC filters contain no multipliers; they consist only of adders, subtractors and registers. They are typically employed in applications that have a large excess sample rate; that is, the system sample rate is much larger than the bandwidth occupied by the signal. CIC filters are frequently used in digital down-converters and digital up-converters.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Interface

The CIC Block has a single data input port and a data output port:

- x_n : data input port, can be between 1 and 128 bits (inclusive).
- y_n : data output port

The two basic building blocks of a CIC filter are the integrator and the comb. A single integrator is a single-pole IIR filter with a transfer function of:

$$H(z) = (1 - z^{-1})^{-1}$$

The integrator's unity feedback coefficient is $y[n] = y[n-1] + x[n]$.


A single comb filter is an odd-symmetric FIR filter described by:

$$y[n] = x[n] - x[n - RM]$$

M is the differential delay selected in the block dialog box, and R is the selected integer rate change factor. The transfer function for a single comb stage is

$$H(z) = 1 - z^{-RM}$$

As seen in the two figures below, the CIC filter cascades N integrator sections together with N comb sections. To keep the integrator and comb structures independent of rate change, a rate change block (i.e., an up-sampler or down-sampler) is inserted between the sections. In the interpolator, the up-sampler causes a rate increase by a factor of R by inserting $R-1$ zero-valued samples between consecutive samples of the comb section output. In the decimator, the down-sampler reduces the sample rate by a factor of R by taking subsamples of the output from the last integrator stage.

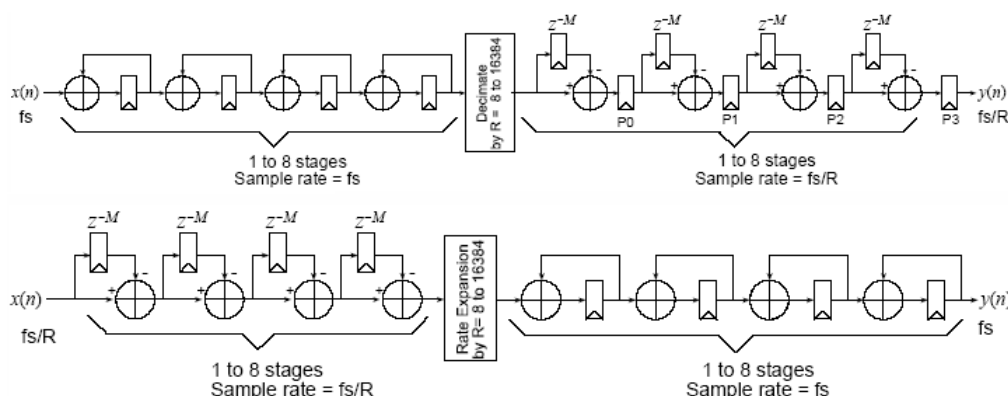

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Input Bit Width:** Width of input sample.
- **Input Binary Point:** Binary point location of input.
- **Filter Type:** Interpolator or Decimator
- **Sample Rate Change:** 8 to 16384 (inclusive)
- **Number of Stages:** 1 to 32 (inclusive)
- **Differential Delay:** 1 to 4 (inclusive)
- **Pipeline Differentiators:** On or Off

Reference

E. B. Hogenauer. *An economical class of digital filters for decimation and interpolation*. IEEE Transactions on Acoustics, Speech and Signal Processing, ASSP- 29(2):155{162, 1981


Convolutional Encoder



Convolutional Encoder


The Xilinx Convolutional Encoder Model block implements an encoder for convolutional codes. Ordinarily used in tandem with a Viterbi decoder, this block performs forward error correction (FEC) in digital communication systems.

Values are encoded using a linear feed forward shift register which computes modulo-two sums over a sliding window of input data, as shown in the figure below. The length of the shift register is specified by the constraint length. The convolution codes specify which bits in the data window contribute to the modulo-two sum. Resetting the block will set the shift register to zero. The encoder rate is the ratio of input to output bit length; thus, for example a rate 1/2 encoder outputs two bits for each input bit. Similarly, a rate 1/3 encoder outputs three bits for each input bit.

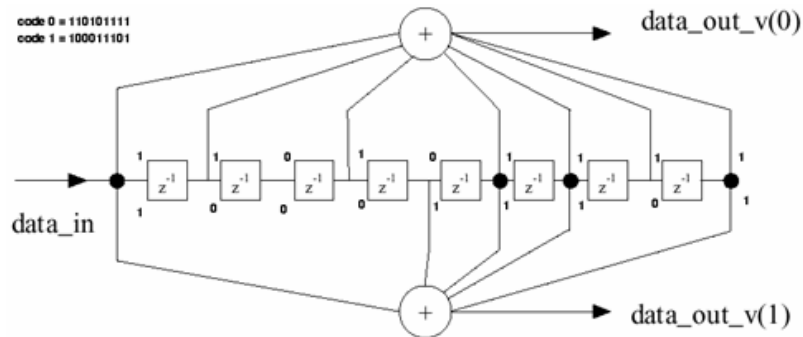

Implementation

The block is implemented using a form of parameterizable mux-based collapsing. In this method constants drive logic blocks. Here the constant is the convolution code which is used to determine which register in the linear feed forward shift register is to be used in computing the output. All logic driven by a constant will be optimized away by the downstream logic synthesis tool.

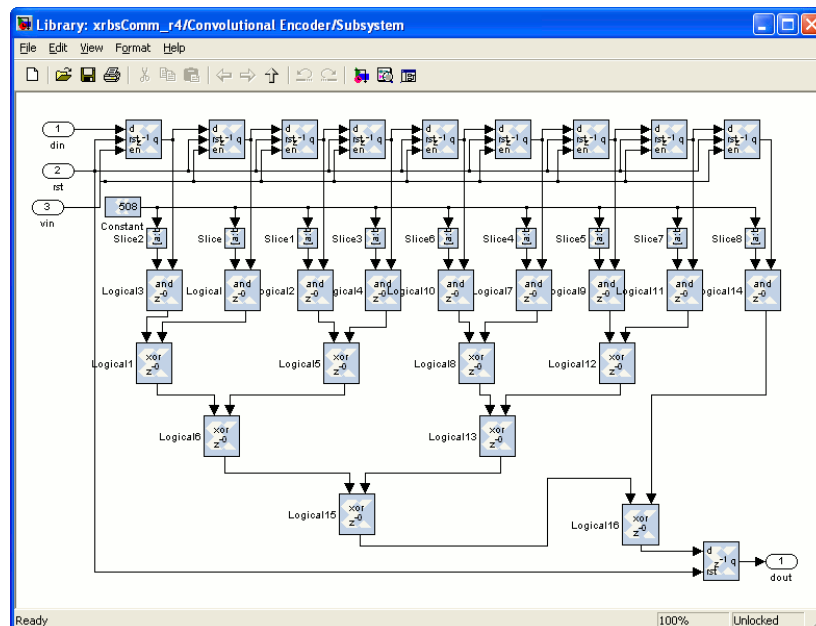

Block Interface

The block currently has three input ports and three output ports. The `din` port must have type `UFix1_0`. It accepts the values to be encoded. The `vin` port indicates that the values presented on `din` are valid. Only valid values are encoded. The `rst` port will reset the convolution encoder when high. To add an enable port, you can open the subsystem and change the constant "Enable" to an input port. The output ports `dout1` and `dout2` output the encoded data. The port `dout1` corresponds to the first code in the array, `dout2` to the second, and so on. To add additional output ports, open the subsystem and follow the directions in the model. The output port `vout` indicates the validity of output values.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Constraint Length:** Equals $n+1$, where n is the length of the constraint register in the encoder
- **Convolutional code array (octal):** Array of octal convolution codes. Output rate is derived from the array length. Between 2 and 7 (inclusive) codes may be entered

CORDIC ATAN



The Xilinx CORDIC ATAN reference block implements a rectangular-to-polar coordinate conversion using a fully parallel CORDIC (COordinate Rotation DIgital Computer) algorithm in Circular Vectoring mode.

That is, given a complex-input $\langle x, y \rangle$, it computes a new vector $\langle m, a \rangle$, where magnitude $m = K \times \sqrt{x^2 + y^2}$, and the angle $a = \arctan(y/x)$. As is common, the magnitude scale factor $K = 1.646760\dots$ is not compensated in the processor, i.e. the magnitude output should be scaled by this factor.

The CORDIC processor is implemented using building blocks from the Xilinx blockset.

The CORDIC ATAN algorithm is implemented in the following 3 steps:

1. **Coarse Angle Rotation.** The algorithm converges only for angles between $-\pi/2$ and $\pi/2$, so if $x < 0$, the input vector is reflected to the 1st or 3rd quadrant by making the x-coordinate non-negative.
2. **Fine Angle Rotation.** For rectangular-to-polar conversion, the resulting vector is rotated through progressively smaller angles, such that y goes to zero. In the i -th stage, the angular rotation is by either $\pm \arctan(1/2^i)$, depending on whether or not its input y is less than or greater than zero.
3. **Angle Correction.** If there was a reflection applied in Step 1, this step applies the appropriate angle correction by subtracting it from $\pm \pi$.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:


- **Number of Processing Elements:** specifies the number of iterative stages used for fine angle rotation.
- **X,Y Data Width:** specifies the width of the inputs x and y. The inputs x, and y should be signed data type having the same data width.
- **X,Y Binary Point Position:** specifies the binary point position for inputs x and y. The inputs x and y should be signed data type with the same binary point position.
- **Latency for each Processing element:** This parameter sets the pipeline latency after each circular rotation stage.

The latency of the CORDIC arc tangent block is calculated based on the formula specified as follows: Latency = 3 + sum (latency of Processing Elements)

Reference

- 1) J. E. Volder, *The CORDIC Trigonometric Computing Technique*, IRE Trans. On Electronic Computers, Vol. EC-8, 1959, pp. 330-334.
- 2) J. S. Walther, *A Unified Algorithm for Elementary Functions*, Spring Joint Computer Conference (1971) pp. 379-385.
- 3) Yu Hen Hu, *CORDIC-Based VLSI Architectures for Digital Signal Processing*, IEEE Signal Processing Magazine, pp. 17-34, July 1992.

CORDIC DIVIDER



The Xilinx CORDIC DIVIDER reference block implements a divider circuit using a fully parallel CORDIC (COordinate Rotation DIgital Computer) algorithm in Linear Vectoring mode.

That is, given an input $\langle x, y \rangle$, it computes the output y/x . The CORDIC processor is implemented using building blocks from the Xilinx blockset.

The CORDIC divider algorithm is implemented in the following 4 steps:

1. **Co-ordinate Rotation.** The CORDIC algorithm converges only for positive values of x . The input vector is always mapped to the 1st quadrant by making the x and y coordinate non-negative. The divider circuit has been designed to converge for all values of X and Y , except for the most negative value.
2. **Normalization.** The CORDIC algorithm converges only for y less than or equal to $2x$. The inputs x and y are shifted to the left until they have a 1 in the most significant bit (MSB). The relative shift of y over x is recorded and passed on to the co-ordinate correction stage.
3. **Linear Rotations.** For ratio calculation, the resulting vector is rotated through progressively smaller angles, such that y goes to zero. In the final stage, the rotation yields y/x .
4. **Co-ordinate Correction.** Based on the co-ordinate axis and a relative shift applied to y over x , this step assigns the appropriate sign to the resulting ratio and multiplies it with $2^{(\text{relative shift of } y \text{ over } x)}$.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:


- **Number of Processing Elements** specifies the number of iterative stages used for linear rotation.
- **X,Y Data Width:** specifies the width of the inputs x and y . The inputs x and y should be signed data type with the same data width.
- **X,Y Binary Point Position:** specifies the binary point position for inputs x and y . The inputs x and y should be signed data type with the same binary point position.
- **Latency for each Processing element:** This parameter sets the pipeline latency after each iterative linear rotation stage.

The latency of the CORDIC divider block is calculated based on the formula specified as follows: Latency = 4 + data width + sum (latency of Processing Elements)

Reference

1. J. E. Volder, *The CORDIC Trigonometric Computing Technique*, IRE Trans. On Electronic Computers, Vol. EC-8, 1959, pp. 330-334.
2. J. S. Walther, *A Unified Algorithm for Elementary Functions*, Spring Joint Computer Conference (1971) pp. 379-385.
3. Yu Hen Hu, *CORDIC-Based VLSI Architectures for Digital Signal Processing*, IEEE Signal Processing Magazine, pp. 17-34, July 1992.

CORDIC LOG



The Xilinx CORDIC LOG reference block implements a natural logarithm circuit using a fully parallel CORDIC (COordinate Rotation DIgital Computer) algorithm in Hyperbolic Vectoring mode.

That is, given an input x , it computes the output $\log(x)$ and also provides a flag for adding complex pi value to the output if a complex output is desired. The CORDIC processor is implemented using building blocks from the Xilinx blockset.

The natural logarithm is calculated indirectly by the CORDIC algorithm by applying the identities listed below.

$$\log(w) = 2 \times \tanh^{-1}[(w-1) / (w+1)]$$

$$\log(w \times 2^E) = \log(w) + E \times \log(2)$$

The CORDIC LOG algorithm is implemented in the following 4 steps:

1. **Co-ordinate Rotation:** The CORDIC algorithm converges only for positive values of x . If $x < 0$, the input data is converted to a non-negative number. If $x = 0$, a zero detect flag is passed along to the last stage which can be exposed at the output stage. The log circuit has been designed to converge for all values of x , except for the most negative value.
2. **Normalization:** The CORDIC algorithm converges only for x , between the values 0.5 (inclusive) and 1. During normalization, the input X is shifted to the left till it has a 1 in the most significant bit. The log output is derived using the identity $\log(w) = 2 \times \tanh^{-1}\{(w-1) / (w+1)\}$. Based on this identity, the input w gets mapped to, $x = w + 1$ and $y = w - 1$.
3. **Linear Rotations:** For $\tanh^{-1}\{(w-1) / (w+1)\}$ calculation, the resulting vector is rotated through progressively smaller angles, such that y goes to zero.
4. **Co-ordinate Correction:** If the input was negative a CMPLX_PI flag is provided at the output for adding PI if a complex output is desired. If a left shift was applied to X , this step adjusts the output by using the equation $\log(w \times 2^E) = \log(w) + E \times \log(2)$.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:


- **Number of Processing Elements (integer value starting from 1):** specifies the number of iterative stages used for hyperbolic rotation.
- **Input Data Width:** specifies the width of input x . The inputs x should be signed data type having the same data width.
- **Input Binary Point Position:** specifies the binary point position for input x . The input x should be signed data type with the same binary point position.
- **Latency for each Processing Element [1001]:** This parameter sets the pipeline latency after each circular rotation stage.

The latency of the CORDIC LOG block is calculated based on the formula specified as follows: Latency = 2+ Data Width+sum (latency of Processing Elements).

Reference

1. J. E. Volder, *The CORDIC Trigonometric Computing Technique*, IRE Trans. On Electronic Computers, Vol. EC-8, 1959, pp. 330-334.
2. J. S. Walther, *A Unified Algorithm for Elementary Functions*, Spring Joint Computer Conference (1971) pp. 379-385.
3. Yu Hen Hu, *CORDIC-Based VLSI Architectures for Digital Signal Processing*, IEEE Signal Processing Magazine, pp. 17-34, July 1992.

CORDIC SINCOS



The Xilinx CORDIC SINCOS reference block implements Sine and Cosine generator circuit using a fully parallel CORDIC (COordinate Rotation Digital Computer) algorithm in Circular Rotation mode.

That is, given input angle z , it computes the output cosine (z) and sine (z). The CORDIC processor is implemented using building blocks from the Xilinx blockset. The CORDIC sine cosine algorithm is implemented in the following 3 steps:

1. **Coarse Angle Rotation.** The algorithm converges only for angles between $-\pi/2$ and $\pi/2$. If $z > \pi/2$, the input angle is reflected to the 1st quadrant by subtracting $\pi/2$ from the input angle. When $z < -\pi/2$, the input angle is reflected back to the 3rd quadrant by adding $\pi/2$ to the input angle. The sine cosine circuit has been designed to converge for all values of z , except for the most negative value.
2. **Fine Angle Rotation.** By setting x equal to $1/1.646760$ and y equal to 0, the rotational mode CORDIC processor yields cosine and sine of the input angle z .
3. **Co-ordinate Correction.** If there was a reflection applied in Step 1, this step applies the appropriate correction.

For $z > \pi/2$: using $z = t + \pi/2$, then

$$\sin(z) = \sin(t) \cdot \cos(\pi/2) + \cos(t) \cdot \sin(\pi/2) = \cos(t)$$

$$\cos(z) = \cos(t) \cdot \cos(\pi/2) - \sin(t) \cdot \sin(\pi/2) = -\sin(t)$$

For $z < -\pi/2$: using $z = t - \pi/2$, then

$$\sin(z) = \sin(t) \cdot \cos(-\pi/2) + \cos(t) \cdot \sin(-\pi/2) = -\cos(t)$$

$$\cos(z) = \cos(t) \cdot \cos(-\pi/2) - \sin(t) \cdot \sin(-\pi/2) = \sin(t)$$

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Number of Processing Elements:** specifies the number of iterative stages used for linear rotation.
- **Input Data Width:** specifies the width of the input z . The input z should be signed data type with the same data width as specified.
- **Input Binary Point Position:** specifies the binary point position for input z . The input z should be signed data type with the same binary point position. The binary point should be chosen to provide enough bits for representing $\pi/2$.
- **Latency for each Processing element:** This parameter sets the pipeline latency after each iterative circular rotation stage. The latency of the CORDIC SINCOS block is calculated based on the formula specified as follows: Latency = 3 + sum (latency of Processing Elements)

Reference

- 1) J. E. Volder, *The CORDIC Trigonometric Computing Technique*, IRE Trans. On Electronic Computers, Vol. EC-8, 1959, pp. 330-334.
- 2) J. S. Walther, *A Unified Algorithm for Elementary Functions*, Spring Joint Computer Conference (1971) pp. 379-385.
- 3) Yu Hen Hu, *CORDIC-Based VLSI Architectures for Digital Signal Processing*, IEEE Signal Processing Magazine, pp. 17-34, July 1992.

CORDIC SQRT



The Xilinx CORDIC SQRT reference block implements a square root circuit using a fully parallel CORDIC (COordinate Rotation Digital Computer) algorithm in Hyperbolic Vectoring mode.

That is, given input x , it computes the output $\sqrt{x}$. The CORDIC processor is implemented using building blocks from the Xilinx blockset.

The square root is calculated indirectly by the CORDIC algorithm by applying the identity listed as follows. $\sqrt{w} = \sqrt{\{(w + 0.25)^2 - (w - 0.25)^2\}}$

The CORDIC square root algorithm is implemented in the following 4 steps:

1. **Co-ordinate Rotation:** The CORDIC algorithm converges only for positive values of x . If $x < 0$, the input data is converted to a non-negative number. If $x = 0$, a zero detect flag is passed to the co-ordinate correction stage. The square root circuit has been designed to converge for all values of x , except for the most negative value.
2. **Normalization:** The CORDIC algorithm converges only for x between 0.25 (inclusive) and 1. During normalization, the input x is shifted to the left till it has a 1 in the most significant non-signed bit. If the left shift results in an odd number of shift values, a right shift is performed resulting in an even number of left shifts. The shift value is divided by 2 and passed on to the co-ordinate correction stage. The square root is derived using the identity $\sqrt{w} = \sqrt{\{(w + 0.25)^2 - (w - 0.25)^2\}}$. Based on this identity the input x gets mapped to, $X = x + 0.25$ and $Y = x - 0.25$.
3. **Hyperbolic Rotations:** For $\sqrt{X^2 - Y^2}$ calculation, the resulting vector is rotated through progressively smaller angles, such that Y goes to zero.
4. **Co-ordinate Correction:** If the input was negative and a left shift was applied to x , this step assigns the appropriate sign to the output and multiplies it with $2^{-\text{shift}}$. If the input was zero, the zero detect flag is used to set the output to 0.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Number of Processing Elements (integer value starting from 1):** specifies the number of iterative stages used for linear rotation.
- **Input Data Width:** specifies the width of the inputs x . The input x should be signed data type with the same data width as specified.
- **Input Binary Point Position:** specifies the binary point position for input x . The input x should be signed data type with the specified binary point position.
- **Latency for each Processing Element [1001]:** This parameter sets the pipeline latency after each iterative hyperbolic rotation stage.


The latency of the CORDIC square root block is calculated based on the formula specified below:

$$\begin{aligned} \text{Latency} &= 7 + (\text{data width} - \text{binary point}) \\ &+ \text{mod} \{ (\text{data width} - \text{binary point}), 2 \} \\ &+ \text{sum} (\text{latency of Processing Elements}) \end{aligned}$$

Reference

- 1) J. E. Volder, *The CORDIC Trigonometric Computing Technique*, IRE Trans. On Electronic Computers, Vol. EC-8, 1959, pp. 330-334.
- 2) J. S. Walther, *A Unified Algorithm for Elementary Functions*, Spring Joint Computer Conference (1971) pp. 379-385.
- 3) Yu Hen Hu, *CORDIC-Based VLSI Architectures for Digital Signal Processing*, IEEE Signal Processing Magazine, pp. 17-34, July 1992.

Dual Port Memory Interpolation MAC FIR Filter



The Xilinx Dual Port Memory Interpolation MAC FIR filter reference block implements a multiply-accumulate-based FIR filter to perform a user-selectable interpolation. One dedicated multiplier and one Dual Port Block RAM are used in the n-tap filter. The filter configuration helps illustrate a cyclic RAM buffer technique for storing coefficients and data samples in a single block ram. The filter allows users to select the interpolation factor they require. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. The filter design takes advantage of these silicon features by implementing a design that is compact and resource-efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Data Input Bit Width:** Width of input sample.
- **Data Input Binary Point:** Binary point location of input.
- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point Per Coefficient:** Binary point location for each coefficient.
- **Interpolation Ratio:** Select the Interpolation Ratio of the filter (2 to 10, inclusive).
- **Sample Period:** Sample period of input.

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438.

Interpolation Filter



The Xilinx n-tap Interpolation Filter reference block implements a multiply-accumulate-based FIR filter to perform a user selected interpolation. One dedicated multiplier and one Dual Port Block RAM are used in the n-tap filter. The filter configuration helps illustrate a cyclic RAM buffer technique for storing coefficients and data samples in a single block ram. The filter allows users to select the interpolation factor they require. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. The filter design takes advantage of these silicon features by implementing a design that is compact and resource efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Input Data Bit Width:** Width of input sample.
- **Input Data Binary Point:** Binary point location of input.
- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point per Coefficient:** Binary point location for each coefficient.
- **Interpolation Factor:** Select the Interpolation Ratio of the filter. Range from 2 to 10.
- **Sample Period:** Sample period of input.

Reference

J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438

m-channel n-tap Transpose FIR Filter



The Xilinx m-channel n-tap Transpose FIR Filter uses a fully parallel architecture with Time Division Multiplexing. The Virtex FPGA family (and Virtex family derivatives) provide dedicated shift register circuitry called the SRL16E, which are exploited in the architecture to achieve optimal implementation of the multichannel architecture. The Time Division Multiplexer and Time Division Demux can be selected to be implemented or not. Embedded Multipliers are used for the multipliers.

As the number of coefficients changes so to does the structure underneath as it is a dynamically built model.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Input Bit Width:** Width of input sample.
- **Input Binary Point:** Binary point location of input.
- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Coefficients Bit Width:** Bit width of each coefficient.
- **Coefficients Binary Point:** Binary point location for each coefficient.
- **Number of Channels:** Specify the number of channels desired. There is no limit to the number of channels supported.
- **Time Division Multiplexer Front End:** The TDM front-end circuit can be implemented or not (if the incoming data is already TDM)
- **Time Division DeMultiplexer Back End:** The TDD back-end circuit can be implemented or not (if you desire a TDM output). This is useful if the filter feeds another multichannel structure.
- **Input Sample Period:** Sample period of input.

Mealy State Machine



A “Mealy machine” is a finite state machine whose output is a function of state transition, i.e., a function of the machine’s current state and current input. A Mealy machine can be described with the following block diagram:

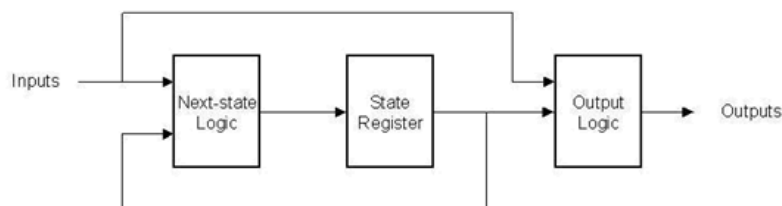


There are many ways to implement such state machines in System Generator (e.g., using the MCode block to implement the transition function, and registers to implement state variables). This reference block provides a method for implementing a Mealy machine using block and distributed memory. The implementation is very fast and efficient. For example, a state machine with 8 states, 1 input, and 2 outputs that are registered can be realized with a single block RAM that runs at more than 150 MHz in a Xilinx Virtex device.

The transition function and output mapping are each represented as an $N \times M$ matrix, where N is the number of states, and M is the size of the input alphabet (e.g., $M = 2$ for a binary input). It is convenient to number rows and columns from 0 to $N - 1$ and 0 to $M - 1$ respectively. Each state is represented as an unsigned integer from 0 to $N - 1$, and each alphabet character is represented as an unsigned integer from 0 to $M - 1$. The row index of each matrix represents the current state, and the column index represents the input character

For the purpose of discussion, let F be the $N \times M$ transition function matrix, and O be the $N \times M$ output function matrix. Then $F(i,j)$ is the next state when the current state is i and the current input character is j , and $O(i,j)$ is the corresponding output of the Mealy machine.

Example

Consider the problem of designing a Mealy machine to recognize the pattern '1011' in a serial stream of bits. The state transition diagram and equivalent transition table are shown below.

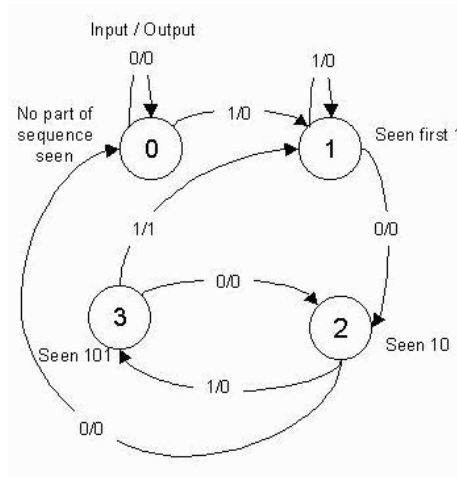

Next State/Output Table

Current State	If Input = 0	If Input = 1
0	0, 0	1, 0
1	2, 0	1, 0
2	0, 0	3, 0
3	2, 0	1, 1

Cell Format: Next State, Output

The table lists the next state and output that result from the current state and input. For example, if the current state is 3 and the input is 1, the next state is 1 and the output is 1, indicating the detection of the desired sequence.

The Mealy State Machine block is configured with next state and output matrices obtained from the next state/output table discussed above. These matrices are constructed as shown below:

Next State/Output Table

Current State	If Input = 0	If Input = 1
0	0, 0	1, 0
1	2, 0	1, 0
2	0, 0	3, 0
3	2, 0	1, 1

Cell Format: Next State, Output

$$\begin{bmatrix} 0 & 1 \\ 2 & 1 \\ 0 & 3 \\ 2 & 1 \end{bmatrix}$$

Next State Matrix

$$\begin{bmatrix} 0 & 0 \\ 0 & 0 \\ 0 & 0 \\ 0 & 1 \end{bmatrix}$$

Output Matrix

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The next state logic, state register, and output logic are implemented using high speed dedicated block RAM. The output logic is implemented using a distributed RAM configured as a lookup table, and therefore has zero latency.

The number of bits used to implement a Mealy state machine is given by the equations:

$$depth = (2^k)(2^i) = 2^{k+i}$$

$$width = k+o$$

$$N = depth * width = (k+o)(2^{k+i})$$

where

N = total number of block RAM bits

s = number of states

k = ceil(log2(s))

i = number of input bits


o = number of output bits

The following table gives examples of block RAM sizes necessary for various state machines:


Number of States	Number of Input Bits	Number of Output Bits	Block RAM Bits Needed
2	5	10	704
4	1	2	32
8	6	7	5120
16	5	4	4096
32	4	3	4096
52	1	11	2176
100	4	5	24576

The block RAM width and depth limitations are described in the online help for the Single Port RAM block.

Moore State Machine



A "Moore machine" is a finite state machine whose output is only a function of the machine's current state. A Moore state machine can be described with the following block diagram:

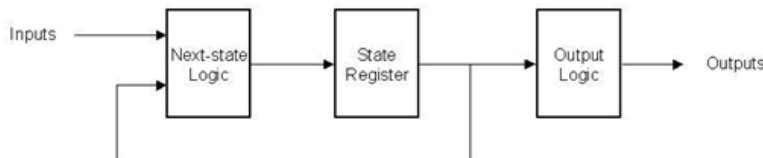


There are many ways to implement such state machines in System Generator (e.g., using the MCode block to implement the transition function, and registers to implement state variables). This reference block provides a method for implementing a Moore machine using block and distributed memory. The implementation is very fast and efficient. For example, a state machine with 8 states, 1 input, and 2 outputs that are registered can be realized with a single block RAM that runs at more than 150 MHz in a Xilinx Virtex device.

The transition function and output mapping are each represented as an $N \times M$ matrix, where N is the number of states, and M represents the number of possible input values (e.g., $M = 2$ for a one bit input). It is convenient to number rows and columns from 0 to $N - 1$ and 0 to $M - 1$ respectively. Each state is represented as an unsigned integer from 0 to $N - 1$, and each alphabet character is represented as an unsigned integer from 0 to $M - 1$. The row index of each matrix represents the current state, and the column index represents the input character.

For the purpose of discussion, let F be the $N \times M$ transition function matrix, and O be the $N \times M$ output function matrix. Then $F(i,j)$ is the next state when the current state is i and the current input character is j , and $O(i,j)$ is the corresponding output of the Moore machine.

Example

Consider the problem of designing a Moore machine to recognize the pattern '1011' in a serial stream of bits. The state transition diagram and equivalent transition table are shown below:

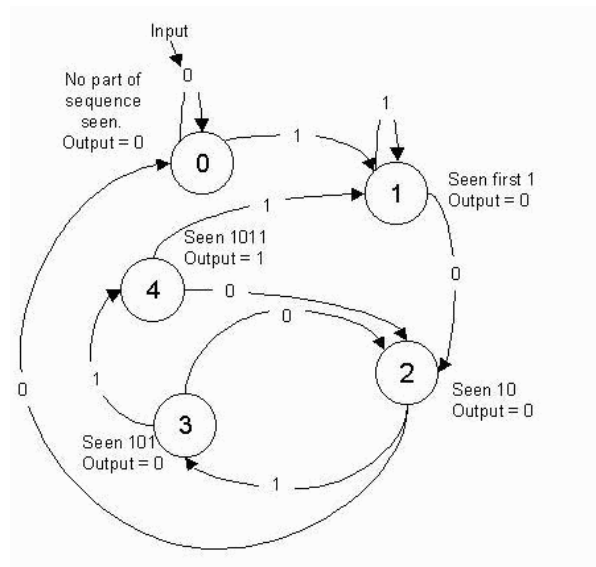


Next State/Output Table

Current State	If Input = 0	If Input = 1	Output
0	0	1	0
1	2	1	0
2	0	3	0
3	2	4	0
4	2	1	1

The table lists the next state and output that result from the current state and input. For example, if the current state is 4, the output is 1 indicating the detection of the desired sequence, and if the input is 1 the next state is state 1.

The Registered Moore State Machine block is configured with next state matrix and output array obtained from the next state/output table discussed above. They are constructed as follows:

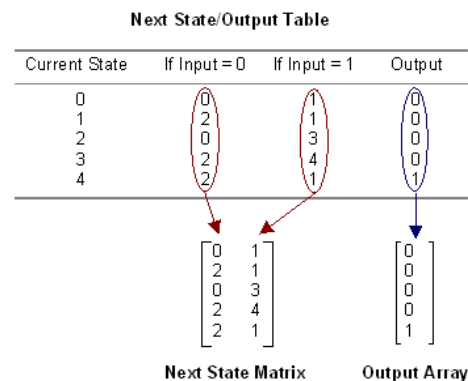

The rows of the matrices correspond to the current state. The next state matrix has one column for each input value. The output array has only one column since the input value does not affect the output of the state machine.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The next state logic and state register in this block are implemented with high speed dedicated block RAM. The output logic is implemented using a distributed RAM configured as a lookup table, and therefore has zero latency.

The number of bits used to implement a Moore state machine is given by the equations:

$$d_s = (2^k)(2^i) = 2^{k+i}$$

$$w_s = k$$

$$N_s = d_s * w_s = (k)(2^{k+i})$$

where

N_s = total number of next state logic block RAM bits

s = number of states

k = $\text{ceil}(\log_2(s))$

i = number of input bits

d_s = depth of state logic block RAM


w_s = width of state logic block RAM

The following table gives examples of block RAM sizes necessary for various state machines:

Number of States	Number of Input Bits	Block RAM Bits Needed
2	5	64
4	1	8
8	6	1536
16	5	2048
32	4	2560
52	1	768
100	4	14336

The block RAM width and depth limitations are described in the core datasheet for the Single Port Block Memory.

Multipath Fading Channel Model



The Multipath Fading Channel Model block implements a model of a fading communication channel. The model supports both Single Input/Single Output (SISO) and Multiple Input/Multiple Output (MIMO) channels. The model provides functionality similar to the Simulink 'Multipath Rayleigh Fading Channel' block in a hardware realizable form. This enables high speed hardware co-simulation of entire communication links.

Theory

The block implements the *Kronecker model*. This model is suitable for systems with antenna arrays not exceeding four elements. The primary model parameters are:

- MT: The number of antennas in the transmit array. For SISO systems this is 1.
- MR: The number of antennas in the receive array. For SISO systems this is 1.
- N; The number of discrete paths between the arrays. For frequency flat channels this is 1.

The model can be represented by the discrete time equation:

$$y(nT) = \sum_{k=1}^N g_k H_k(nT) x(nT - d_k)$$

Where:

- $x(\cdot)$: Transmit symbol column vector (MT complex elements, time varying).
- T: Sample interval.
- n: Sample index.
- d_k : Delay for path k.
- $H_k(\cdot)$: Channel coefficient matrix (MR×MT complex elements, time varying).
- g_k : Gain for path k.
- $y(\cdot)$: Receive symbol column vector (MR complex elements, time varying).

The channel coefficient matrix can be further defined in terms of the spatial covariance matrices of the antenna arrays:


$$H_k(nT) = R_{T,k}^{1/2} H_{U,k}(nT) R_{R,k}^{1/2}$$

Where:

- $R_{T,k}$: Transmit array spatial covariance matrix for path k.
- $H_{U,k}(\cdot)$: Uncorrelated channel coefficient matrix for path k ($M_R \times M_T$ elements, time varying).
- $R_{R,k}$: Receive array spatial covariance matrix for path k.

Implementation

The above equations can be rephrased as sparse matrix operations. This allows the elimination of the path summation. The model can then be implemented as follows:

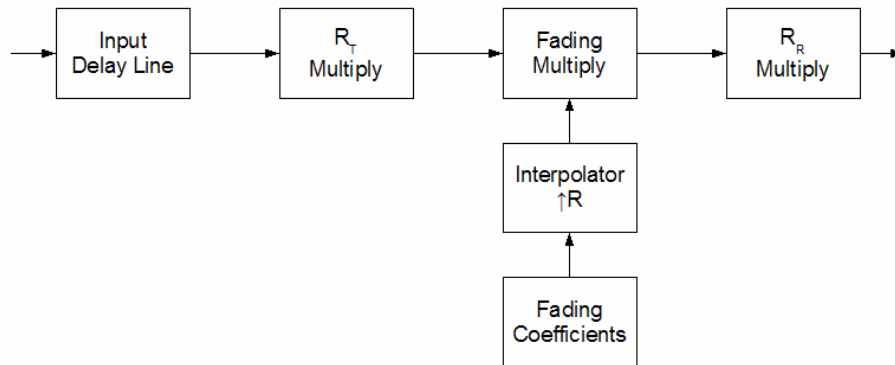

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Paths tab

Parameters specific to the Paths tab are as follows:

- **Path Delay Vector:** Specify the delay spread for each path in the model. Each element represents the number of samples to delay the path by. The value must be an N element vector.
- **Path Gain Vector:** Specify the gain for each path in the model. Each element represents the linear gain of the path. The value must be an N element vector

Covariance tab

To support frequency selective channels ($N > 1$), these parameters can be specified as three dimensional arrays. The first two dimensions specify the square covariance matrix, the third specifies the path. If a two dimensional array is specified for a frequency selective channel, it is automatically replicated to produce a three dimensional array. The third dimension is optional for frequency flat ($N = 1$) channels.

- **Transmit Array Spatial Covariance Matrices:** Specify the transmit antenna array covariance matrix for each path. The value can be a $M_T \times M_T$ matrix, or a $M_T \times M_T \times N$ array.
- **Receive Array Spatial Covariance Matrices:** Specify the receive antenna array covariance matrix for each path. The value can be a $M_R \times M_R$ matrix, or a $M_R \times M_R \times N$ array.

Fading tab

- **Spectrum Data:** Specify the fading phase and frequency response of each physical path. The number of physical paths is the product of the number of discrete paths (N), and the number of paths between each element of the transmit and receive antenna arrays ($M_T \times M_R$). Spectrum data must be a multidimensional structure with dimensions $M_R \times M_T \times N$.

- **Rate:** Specify the interpolation rate from maximum Doppler frequency (F_{DMAX}) to channel sample frequency (FS). It can be determined as follows:

$$R = \left\lceil \frac{FS}{(256 \cdot F_{DMAX})} \right\rceil$$

Internal tab

- **Datapath Width in Bits:** Specify the width in bits of all internal datapaths.
- **Transmit Multiply Binary Point:** Specify the binary point position at the output of the RT multiply block.
- **Fading Multiply Binary Point:** Specify the binary point position at the output of the fading multiply block.
- **Receive Multiply Binary Point:** Specify the binary point position at the output of the RR multiply block.
- **Covariance Matrix Binary Point:** Specify the binary point position of the covariance matrix coefficients.
- **Random Seed:** Specify the 61-bit (16 hexadecimal digits) seed of the phase noise random number generator.

Functions

The model includes two MATLAB functions to simplify parameter generation.

create_r_la

The 'create_r_la(M,P,phi0,d,lambda,AS)' function generates a covariance matrix from steering vectors as described in [Reference \[1\]](#) at the end of this block description.

- **M:** Specify the number of antennas in the array (transmit or receive).
- **P:** Specify the number of random paths to integrate over to generate the matrix (a value of 50000 gives good results).
- **phi0:** Specify the mean angle of departure (for transmit arrays) or arrival (for receive arrays). Value is in radians.
- **d:** Specify antenna spacing as a vector of antenna positions along a baseline. If this value is specified as a scalar value, the function assumes a uniform linear array (ULA) with the elements evenly distributed about the baseline origin.
- **lambda:** Specify the wavelength, in meters.
- **AS:** Specify the angular spread around the mean angle in radians.

For example, to create a matrix for a 3 element ULA with element spacing of $\lambda/2$ at 2GHz with an angular spread of 15°:

```
lambda=2.0e9/2.99e8;
create_r_la(3,50000,0,lambda/2,lambda,15*(2*pi/360))
```

calc_path_data

The 'calc_path_data(spec_type,spec_fd)' function generates spectrum data for a model.

- **spec_type:** Specify the spectrum type for each physical path in the model. This value must be a multidimensional array with dimensions MR×MT×N. Each element specifies the spectrum type for the physical path.
- **spec_fd:** Specify the spectrum Doppler frequency for each physical path, normalized to the maximum Doppler frequency (FDMAX). This value can be a multidimensional array with dimensions MR×MT×N or scalar, in which case the value is applied to all physical paths. If omitted a value of unity is assumed.

The value of each spectrum type element specifies the spectrum shape to use for that physical path. Four spectrum types are supported.

- **Type 0:** Specify a null physical path. The path coefficients are zero, and the path exhibits no transmission.
- **Type 1:** Specify an impulse physical path. An impulse path has a single impulse in its spectrum. They can be used to represent the line-of-sight (LOS) paths in a channel model (such as required by Rician channels).
- **Type 2:** Specify a classic spectrum physical path. The classic spectrum is also known as the Jakes or Clarke spectrum. It is used to model wireless links with mobile stations [2] [3] [4] and is defined as:

$$S(f) \propto \frac{1}{\sqrt{1 - \left(\frac{f}{f_d}\right)^2}} \quad |f| \leq f_d$$

$$S(f) = 0 \quad \text{elsewhere}$$

- **Type 3:** Specify a rounded spectrum physical path. The rounded spectrum is used to model wireless links with fixed stations [5] and is defined as:

$$S(f) \propto 1 - 1.72 \left(\frac{f}{f_d}\right)^2 + 0.785 \left(\frac{f}{f_d}\right)^4 \quad |f| \leq f_d$$

$$S(f) = 0 \quad \text{elsewhere}$$

Once generated, each spectrum is normalized to unity power.

For example, to create and plot spectrum data for a $M_T=4$, $M_R=3$ and $N=2$ channel, where the two paths combine to give Rician fading (i.e. impulse and classic). We assume that the mobile station (MS) is receding from the base station (BS) at $0.707 \times v_{MS}$ (giving $f_d=0.707$ for the LOS physical paths):

```
Mt=4; Mr=3; N=2;
spec_type=cat(3,ones(Mr,Mt)*1,ones(Mr,Mt)*2);
spec_fd=cat(3,ones(Mr,Mt)*0.707,ones(Mr,Mt)*1);
spec_data=calc_path_data(spec_type,spec_fd);
plot([spec_data.spectrum]);
```

Data Format


Internally the model uses a three signal interface for transferring complex vector quantities between blocks. This interface allows matrix/vector operations to be chained together. Vectors are transferred as streams of interleaved real and imaginary samples tagged with

frame and repetition handshaking signals. This interface allows vectors to be repeated multiple times per frame. This feature can be used to simplify matrix-vector multiplies, where the vector values are required repeatedly, once per matrix row.

The three signal interface is as follows:


- **reim**: Stream of interleaved real and imaginary (I and Q) samples for each vector. Potentially each vector is transferred multiple times, as indicated by the rd signal.
- **fd**: Indicates the start of each vector frame.
- **rd**: Indicates the start of each vector repetition.

The diagram below shows how a 3-element vector would be represented before multiplication by a 3×3 matrix. The vector is repeated 3 times (once for each matrix row) greatly simplifying the multiplication logic.

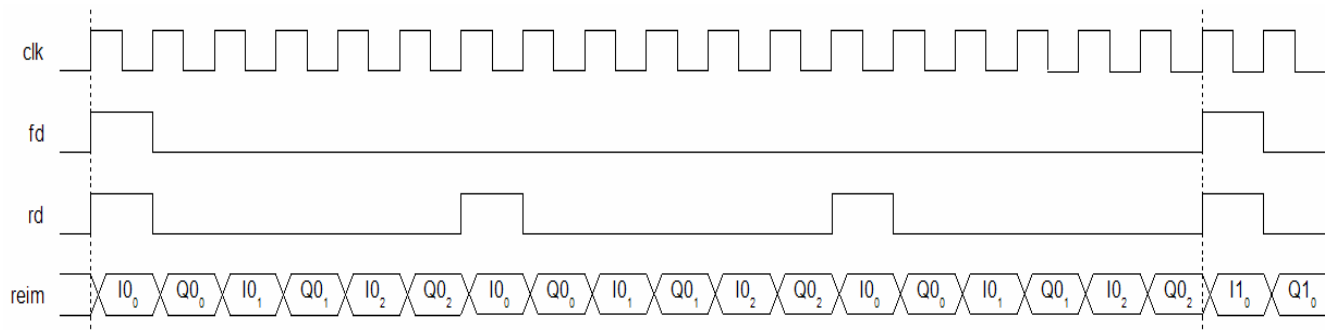


Input

Input data is presented on the in_fd, in_rd, and in_reim ports. Vector repetition is not required at the input, hence the in_rd signal is ignored, and only the first 2×MT samples are used. For example, for a MT=2 channel:

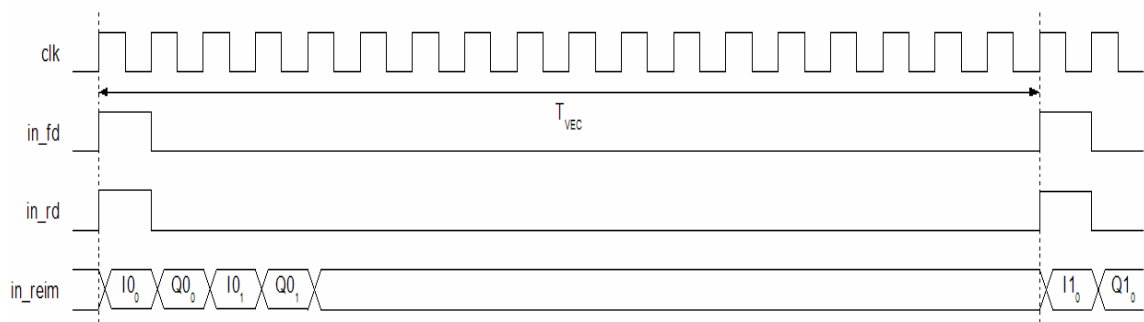

Output

Output data is presented on the out_fd, out_rd, and out_reim ports. The data is repeated throughout the frame. For example, for a MR=3 channel.:

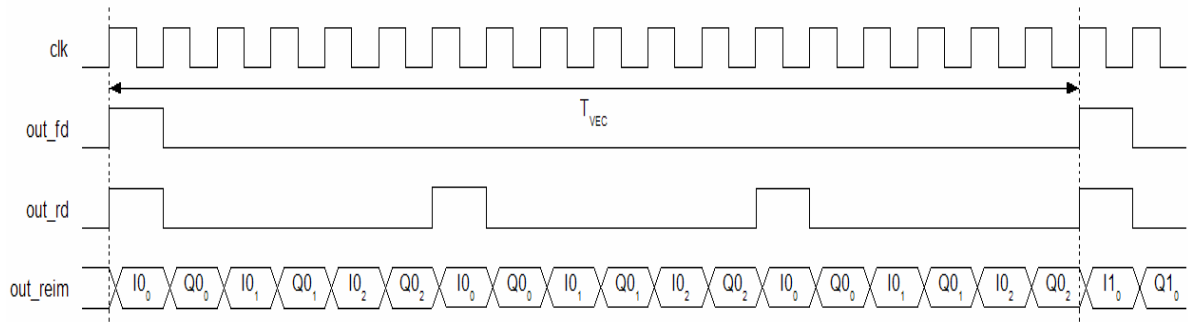

Timing

The number of samples between successive fd pulses (TVEC), must be sufficient for the internal blocks to process the data. The number of cycles required by each block is a function of the MT, MR, N, and RATE parameters as follows:

RT Multiply: Requires $2 \times MT \times MT \times N$ cycles

Fading Multiply: Requires $2 \times MT \times MR \times N \times \text{ceil}(64 / \text{RATE})$ cycles

RR Multiply: Requires $2 \times MR \times MR \times N$ cycles

Hence, the minimum value of TVEC is:

$$T_{VEC} = 2Nmax(max(M_T, M_R))^2,M_TM_R\lceil 64/ (RATE) \rceil$$

The model will produce an error during simulation if this constraint is not met.

Initialization

The model requires approximate $3 \times R$ input frames for the fading coefficient generator to initialize. During this period the channel coefficients, and consequentially the output data, will be zero.

Demonstrations

Two demonstrations are included that show how the model can be used. Each includes notes on how parameters can be calculated.

- SISO Channel Model : A demo showing a SISO channel based on 3GPP TS 25.104, Annex B.2, Case 4.
- MIMO Channel Model : A demo showing a frequency flat MIMO channel.

Hardware Co-Simulation Example


An example of how to use the model for hardware co-simulation is included in the `<sysgen_tree>/examples/mfcm_hwcossim` directory. The directory contains three files:

- `mfcm_hw.mdl` : Model specifying the hardware component of the co-simulation design. Design consists of a shared memory for data input, a channel model, and a shared memory for data output.
- `mfcm_hw_cw.bit`: The 'mfcm_hw.mdl' design compiled for the XtremeDSP kit (XC2V3000-4).
- `mfcm_cosim.mdl` : Model specifying the software component of the co-simulation. The shared memory blocks are used to pass packets of data to the hardware for processing, and to receive packets of processed data. By default this design will use the pre-generated 'mfcm_hw_cw.bit' – this will have to be regenerated for different hardware targets.

Reference

1. A. Forenza and R.W. Heath Jr. *Impact of Antenna Geometry on MIMO Communication in Indoor Clustered Channels*, Wireless Networking and Communications Group, ECE Department, The University of Texas at Austin.
2. 3GPP TS 25.101 V6.7.0 (2005-03) *Annex B, User Equipment (UE) radio transmission and reception (FDD)*, Technical Specification Group Radio Access Network, 3rd Generation Partnership Project.
3. 3GPP TS 25.104 V6.8.0 (2004-12) *Annex B, Base Station (BS) radio transmission and reception (FDD)*, Technical Specification Group Radio Access Network, 3rd Generation Partnership Project.
4. 3GPP TR 25.943 V6.0.0 (2004-12), *Deployment aspects*, Technical Specification Group Radio Access Network, 3rd Generation Partnership Project.
5. IEEE 802.16.3c-01/29r4 (2001-07-16) *Channel Models for Fixed Wireless Applications*, IEEE 802.16 Broadband Wireless Access Working Group.

n-tap Dual Port Memory MAC FIR Filter



The Xilinx n-tap Dual Port Block RAM MAC FIR Filter reference block implements a multiply-accumulate-based FIR filter. One dedicated multiplier and one dual port block RAM are used in the filter. The filter configuration illustrates a technique for storing coefficients and data samples in filter design. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. The filter design takes advantage of these silicon features by implementing a design that is compact and resource efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Data Input Bit Width:** Width of input sample.
- **Data Input Binary Point:** Binary point location of input.
- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point per Coefficient:** Binary point location for each coefficient.
- **Sample Period:** Sample period of input.

Reference

- J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438

n-tap MAC FIR Filter



The Xilinx n-tap MAC FIR Filter reference block implements a multiply-accumulate-based FIR filter. One, two, and four Virtex-II dedicated multipliers are used in the n-tap, the 2n-tap, and the 4n-tap filters, respectively. The three filter configurations help illustrate the trade-offs between filter throughput and device resource consumption. The Virtex FPGA family (and Virtex family derivatives) provide dedicated circuitry for building fast, compact adders, multipliers, and flexible memory architectures. Each filter design takes advantage of these silicon features by implementing a design that is compact and resource efficient.

Implementation details are provided in the filter design subsystems. To read the annotations, place the block in a model, then right-click on the block and select **Explore** from the popup menu. Double click on one of the sub-blocks to open the sub-block model and read the annotations.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Parameters specific to this reference block are as follows:

- **Coefficients:** Specify coefficients for the filter. Number of taps is inferred from size of coefficient vector.
- **Number of Bits per Coefficient:** Bit width of each coefficient.
- **Binary Point for Coefficient:** Binary point location for each coefficient.
- **Number of Bits per Input Sample:** Width of input sample.
- **Binary Point for Input Samples:** Binary point location of input.
- **Input Sample Period:** Sample period of input.


Reference

[1] J. Hwang and J. Ballagh. *Building Custom FIR Filters Using System Generator*. 12th International Field-Programmable Logic and Applications Conference (FPL). Montpellier, France, September 2002. Lecture Notes in Computer Science 2438

Registered Mealy State Machine



A "Mealy machine" is a finite state machine whose output is a function of state transition, i.e., a function of the machine's current state and current input. A "registered Mealy machine" is one having registered output, and can be described with the following block diagram:

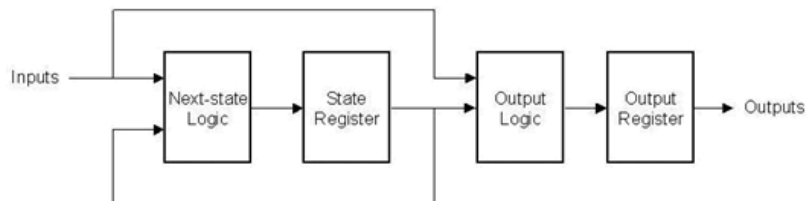


There are many ways to implement such state machines in System Generator (e.g., using the MCode block to implement the transition function, and registers to implement state variables). This reference block provides a method for implementing a Mealy machine using block and distributed memory. The implementation is very fast and efficient. For example, a state machine with 8 states, 1 input, and 2 outputs that are registered can be realized with a single block RAM that runs at more than 150 MHz in a Xilinx Virtex device.

The transition function and output mapping are each represented as an $N \times M$ matrix, where N is the number of states, and M is the size of the input alphabet (e.g., $M = 2$ for a binary input). It is convenient to number rows and columns from 0 to $N - 1$ and 0 to $M - 1$ respectively. Each state is represented as an unsigned integer from 0 to $N - 1$, and each alphabet character is represented as an unsigned integer from 0 to $M - 1$. The row index of each matrix represents the current state, and the column index represents the input character

For the purpose of discussion, let F be the $N \times M$ transition function matrix, and O be the $N \times M$ output function matrix. Then $F(i,j)$ is the next state when the current state is i and the current input character is j , and $O(i,j)$ is the corresponding output of the Mealy machine.

Example

Consider the problem of designing a Mealy machine to recognize the pattern '1011' in a serial stream of bits. The state transition diagram and equivalent transition table are shown below.

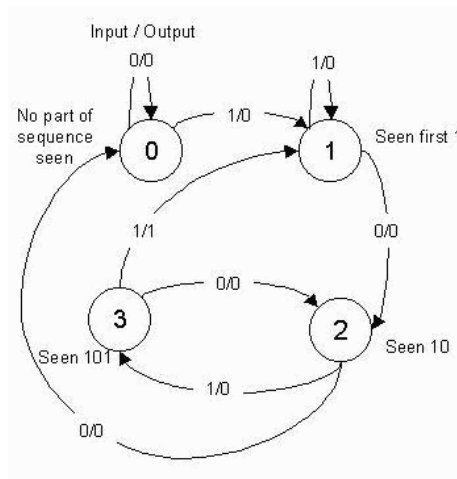

Next State/Output Table

Current State	If Input = 0	If Input = 1
0	0, 0	1, 0
1	2, 0	1, 1
2	0, 0	3, 0
3	2, 0	1, 1

Cell Format: Next State, Output

The table lists the next state and output that result from the current state and input. For instance, if the current state is 3 and the input is 1, the next state is 1 and the output is 1, indicating the detection of the desired sequence.

The Registered Mealy State Machine block is configured with next state and output matrices obtained from the next state/output table discussed above. These matrices are constructed as shown below:

Next State/Output Table

Current State	If Input = 0	If Input = 1
0	0, 0	1, 0
1	2, 0	1, 1
2	0, 0	3, 0
3	2, 0	1, 1

Cell Format: Next State, Output

0	1
2	1
0	3
2	1

Next State Matrix

0	0
0	0
0	0
0	1

Output Matrix

Rows of the matrices correspond to states, and columns correspond to input values.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The next state logic, state register, output logic, and output register are implemented using high speed dedicated block RAM. Of the four blocks in the state machine library, this is the fastest and most area efficient. However, the output is registered and thus the input does not affect the output instantaneously.

The number of bits used to implement a Mealy state machine is given by the equations:

$$depth = (2^k)(2^i) = 2^{k+i}$$

$$width = k + o$$

$$N = depth * width = (k + o)(2^{k+i})$$

where

N = total number of block RAM bits

s = number of states

k = ceil(log₂(s))


i = number of input bits

o = number of output bits


The following table gives examples of block RAM sizes necessary for various state machines:

Number of States	Number of Input Bits	Number of Output Bits	Block RAM Bits Needed
2	5	10	704
4	1	2	32
8	6	7	5120
16	5	4	4096
32	4	3	4096
52	1	11	2176
100	4	5	24576

Registered Moore State Machine



A "Moore machine" is a finite state machine whose output is only a function of the machine's current state. A "registered Moore machine" is one having registered output, and can be described with the following block diagram:

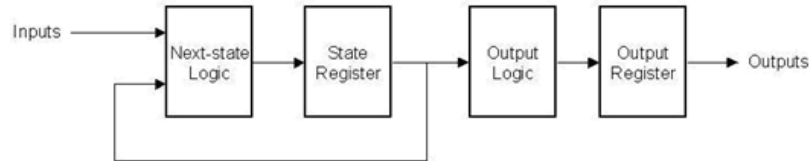


There are many ways to implement such state machines in System Generator, e.g., using the Mcode block. This reference block provides a method for implementing a Moore machine using block and distributed memory. The implementation is very fast and efficient. For example, a state machine with 8 states, 1 input, and 2 outputs that are registered can be realized with a single block RAM that runs at more than 150 MHz in a Xilinx Virtex device.

The transition function and output mapping are each represented as an $N \times M$ matrix, where N is the number of states, and M is the size of the input alphabet (e.g., $M = 2$ for a binary input). It is convenient to number rows and columns from 0 to $N - 1$ and 0 to $M - 1$ respectively. Each state is represented as an unsigned integer from 0 to $N - 1$, and each alphabet character is represented as an unsigned integer from 0 to $M - 1$. The row index of each matrix represents the current state, and the column index represents the input character.

For the purpose of discussion, let F be the $N \times M$ transition function matrix, and O be the $N \times M$ output function matrix. Then $F(i,j)$ is the next state when the current state is i and the current input character is j , and $O(i,j)$ is the corresponding output of the Mealy machine.

Example

Consider the problem of designing a Moore machine to recognize the pattern '1011' in a serial stream of bits. The state transition diagram and equivalent transition table are shown below..

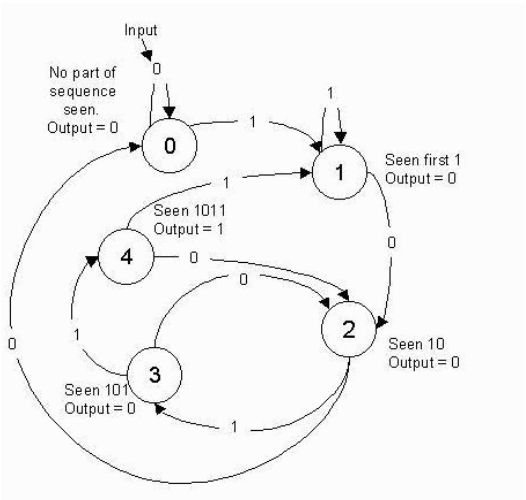

Next State/Output Table

Current State	If Input = 0	If Input = 1	Output
0	0	1	0
1	2	1	0
2	0	3	0
3	2	4	0
4	2	1	1

The table lists the next state and output that result from the current state and input. For example, if the current state is 4, the output is 1 indicating the detection of the desired sequence, and if the input is 1 the next state is state 1.

The Registered Moore State Machine block is configured with next state matrix and output array obtained from the next state/output table discussed above. They are constructed as shown below:

Next State/Output Table

Current State	If Input = 0	If Input = 1	Output
0	0	1	0
1	2	1	0
2	0	3	0
3	2	4	0
4	2	1	1

$$\begin{bmatrix} 0 & 1 \\ 2 & 1 \\ 0 & 3 \\ 2 & 4 \\ 2 & 1 \end{bmatrix}$$

Next State Matrix

$$\begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

Output Array

The rows of the matrices correspond to the current state. The next state matrix has one column for each input value. The output array has only one column since the input value does not affect the output of the state machine.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The next state logic and state register in this block are implemented with high speed dedicated block RAM.

The number of bits used to implement a Moore state machine is given by the equations:

$$d_s = (2^k)(2^i) = 2^{k+i}$$

$$w_s = k$$

$$N_s = d_s * w_s = (k)(2^{k+i})$$

where

N_s = total number of next state logic block RAM bits

s = number of states

k = $\text{ceil}(\log_2(s))$

i = number of input bits

d_s = depth of state logic block RAM


w_s = width of state logic block RAM

The following table gives examples of block RAM sizes necessary for various state machines:

Number of States	Number of Input Bits	Block RAM Bits Needed
2	5	64
4	1	8
8	6	1536
16	5	2048
32	4	2560
52	1	768
100	4	14336

The block RAM width and depth limitations are described in the core datasheet for the Single Port Block Memory.

Virtex Line Buffer



The Xilinx Virtex Line Buffer reference block delays a sequential stream of pixels by the specified buffer depth.


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Buffer Depth:** Number of samples the stream of pixels will be delayed.
- **Sample Period:** Sample rate at which the block will run

Virtex2 Line Buffer



The Xilinx Virtex2 Line Buffer reference block delays a sequential stream of pixels by the specified buffer depth. It is optimized for the Virtex2 family since it uses the Read Before Write option on the underlying Single Port RAM block


Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Buffer Depth:** Number of samples the stream of pixels will be delayed.
- **Sample Period:** Sample rate at which the block will run.

Virtex2 5 Line Buffer



The Xilinx Virtex2 5 Line Buffer reference block buffers a sequential stream of pixels to construct 5 lines of output. Each line is delayed by N samples, where N is the length of the line. Line 1 is delayed $4*N$ samples, each of the following lines are delay by N fewer samples, and line 5 is a copy of the input.

This block uses Virtex2 Line Buffer block which is located in the Imaging library of the Xilinx Reference Blockset.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to this reference block are as follows:

- **Line Size:** Number of samples each line will be delayed.
- **Sample Period:** Sample rate at which the block will run.

White Gaussian Noise Generator




The The Xilinx White Gaussian Noise Generator (WGNG) generates white Gaussian noise using a combination of the Box-Muller algorithm and the Central Limit Theorem following the general approach described in [1] (reference listed below).

The Box-Muller algorithm generates a unit normal random variable via a transformation of two independent random variables that are uniformly distributed over [0,1]. This is accomplished by storing Box-Muller function values in ROMs and addressing them with uniform random


variables.

The uniform random variables are produced by multiple-bit leap-forward LFSRs. A standard LFSR generates one output per clock cycle. K-bit leap-forward LFSRs are able to generate k outputs in a single cycle. For example, a 4-bit leap-forward LFSR outputs a discrete uniform random variable between 0 and 15. A portion of the 48-bit block parameter seed initializes each LFSR allowing customization. The outputs of four parallel Box-Muller subsystems are averaged to obtain a probability density function (PDF) that is Gaussian to within 0.2% out to 4.8sigma. The overall latency of the WGNG is 10 clock cycles. The output port noise is a 12 bit signed number with 7 bits after the binary point.

4-bit Leap-Forward LFSR

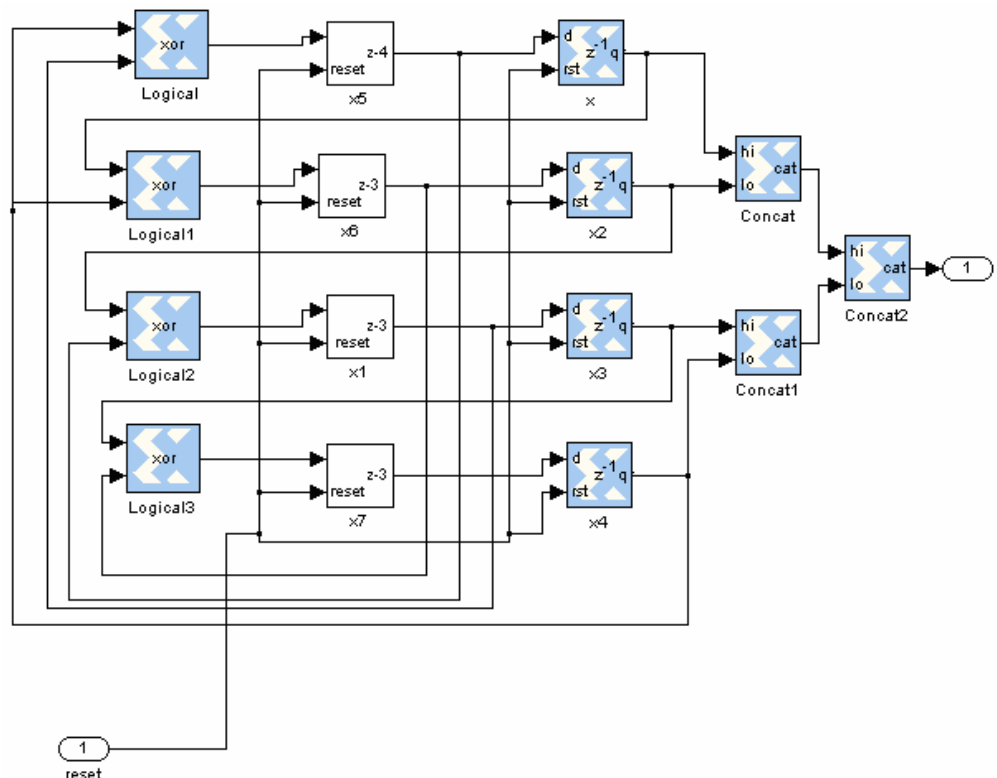

Box-Muller Method

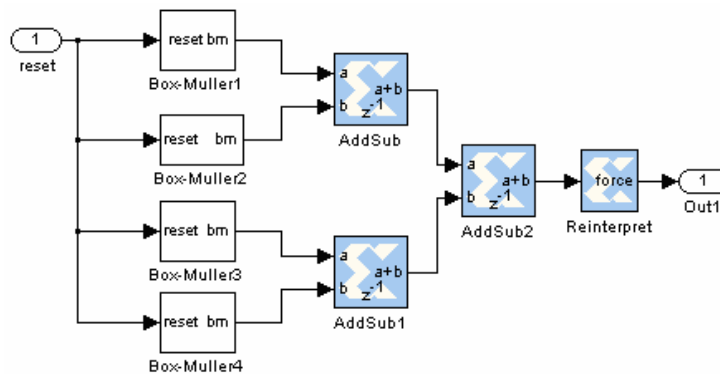

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

The block parameter is a decimal starting seed value.

Reference

A. Ghazel, E. Boutillon, J. L. Danger, G. Gulak and H. Laamari, *Design and Performance Analysis of a High Speed AWGN Communication Channel Emulator*, IEEE PACRIM Conference, Victoria, B. C., Aug. 2001.

Xilinx XtremeDSP Kit Blockset

Blocks related to the XtremeDSP Kit include the following:

Library	Description
XtremeDSP Analog to Digital Converter	Allows System Generator components to connect to the two analog input channels on the Nallatech BenAdda board when a model is prepared for hardware co-simulation
XtremeDSP Co-Simulation	Can be used in place of a Simulink subsystem that was compiled for XtremeDSP co-simulation.
XtremeDSP Digital to Analog Converter	Allows System Generator components to connect to the two analog output channels on the Nallatech BenAdda board when a model is prepared for hardware co-simulation.
XtremeDSP External RAM	Allows System Generator components to connect to the external 256K x 16 ZBT SRAM on the Nallatech BenAdda board when a model is prepared for hardware co-simulation.
XtremeDSP LED Flasher	Allows System Generator models to use the tri-color LEDs on the BenADDA board when a model is prepared for co-simulation.

XtremeDSP Analog to Digital Converter



The Xilinx XtremeDSP ADC block allows System Generator components to connect to the two analog input channels on the Nallatech BenAdda board when a model is prepared for hardware co-simulation. Separate ADC blocks, ADC1 and ADC2 are provided for analog input channels one and two, respectively.

In Simulink, the ADC block is modeled using an input gateway that drives a register. The ADC block accepts a double signal as input and produces a signed 14-bit Xilinx fixed-point signal as output. The output signal uses 13 fractional bits.

In hardware, a component that is driven by the ADC block output will be driven by one of the two 14-bit AD6644 analog to digital converter devices on the BenAdda board. When a System Generator model that uses an ADC block is translated into hardware, the ADC block is translated into a top-level input port on the model HDL. The appropriate pin location constraints are added in the BenAdda constraints file, thereby ensuring the port is driven appropriately by the ADC component.

A free running clock should be used when a hardware co-simulation model contains an ADC block. In addition, the programmable clock speed should not be set higher than 64 MHz.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the ADC block are:

- **Sample Period:** specifies the sample period for the block.

Data Sheet

A data sheet for the AD6644 device is provided in the XtremeDSP development kit install directory. If FUSE denotes the directory containing the Nallatech FUSE software, the data sheet can be found in the following location:

FUSE\XtremeDSP Development Kit\Docs\Datasheets\ADC ad6644.pdf

XtremeDSP Co-Simulation



The Xilinx XtremeDSP Co-simulation block can be used in place of a Simulink subsystem that was compiled for XtremeDSP co-simulation. During simulation, the block behaves exactly as the subsystem from which it originated, except that the simulation data is processed in hardware instead of software.

The port interface of the co-simulation block will vary. When a model is compiled for co-simulation, a new library is created that contains a custom XtremeDSP hardware co-simulation block. This block has input and output ports that match the gateway names (or port names if the subsystem is not the top level) from the original model.

The hardware co-simulation block interacts with the XtremeDSP development kit board during a Simulink simulation. Simulation data that is written to the input ports of the block are passed to the hardware by the block. Conversely, when data is read from the co-simulation block's output ports, the block reads the appropriate values from the hardware and drives them on the output ports so they can be interpreted in Simulink. In addition, the block automatically opens, configures, steps, and closes the development kit board.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.


Basic tab

Parameters specific to the Basic tab are as follows:

- **Clock source:** You may select between Single stepped and Free running clock sources. Selecting a Single Stepped clock allows the block to step the board one clock cycle at a time. Each clock cycle step corresponds to some duration of time in Simulink. Using this clock source ensures the behavior of the co-simulation hardware during simulation will be bit and cycle accurate when compared to the simulation behavior of the subsystem from which it originated. Sometimes single stepping is not necessary and the board can be run with a Free Running clock. In this case, the board will operate asynchronously to the Simulink simulation.
- **Frequency (MHz):** When Free Running clock mode is selected, you may specify the operating frequency that the free running clock should be programmed to run at during simulation. The selected clock frequency will be rounded to the nearest valid frequency available from the programmable oscillator. Note: You must take care to specify a frequency that does not exceed the maximum operating frequency of the model's FPGA implementation. The valid operating frequencies of the programmable oscillator are listed below:
20 MHz; 25 MHz; 30 MHz; 33.33 MHz; 40 MHz; 45 MHz; 50 MHz; 60 MHz; 66.66 MHz; 70 MHz; 75 MHz; 80 MHz; 90 MHz; 100 MHz; 120 MHz.
- **Card number:** Specifies the index of the XtremeDSP development kit card to use for hardware co-simulation. A default value of 1 should be used unless you have multiple XtremeDSP kit boards installed.
- **Bus:** Allows you to choose the interface in which the co-simulation block communicates with the XtremeDSP development kit board during a Simulink simulation. You may select between PCI and USB interfaces.

- **Has combinational path:** Sometimes it is necessary to have a direct combinational feedback path from an output port on a hardware co-simulation block to an input port on the same block (e.g., a wire connecting an output port to an input port on a given block). If you require a direct feedback path from an output to input port, and your design does not include a combinational path from any input port to any output port, un-checking this box allows the feedback path in the design.
- **Bitstream name:** Specifies the co-simulation FPGA configuration file for the XtremeDSP development kit board. When a new co-simulation block is instantiated during compilation, this parameter is automatically set so that it points to the appropriate configuration file. You need only adjust this parameter if the location of the configuration file changes.

XtremeDSP Digital to Analog Converter



The Xilinx XtremeDSP DAC block allows System Generator components to connect to the two analog output channels on the Nallatech BenAdda board when a model is prepared for hardware co-simulation. Separate DAC blocks DAC1 and DAC2 are provided for analog output channels one and two respectively.

In Simulink, the DAC block is modeled by a register block that drives an output gateway. All DAC control signals are appropriately wired to constants. The DAC block must be driven by a 14-bit Xilinx fixed-point signal, with the binary point at position 13. The output port of the DAC block produces a signal of type double.

In hardware, a component that drives a DAC block input will drive one of the two 14-bit AD9772A digital to analog converter devices on the BenAdda board. When a System Generator model that uses DAC block is translated into hardware, the DAC block is translated into a top-level output port on the model HDL. The appropriate pin location constraints are added in the BenAdda constraints file, thereby ensuring the output port drives the appropriate DAC pins.

A free running clock should be used when a hardware co-simulation model contains a DAC block. In addition, the programmable clock speed should not be set higher than 64 MHz.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the DAC block are:

- **Sample Period:** specifies the sample period for the block.

Data Sheet

A data sheet for the AD9772A device is provided in the directory to which the XtremeDSP development kit has been installed. If FUSE denotes the directory containing the FUSE software, the data sheet can be found in the following location:

FUSE\XtremeDSP Development Kit\Docs\Datasheets\DAC AD9772A.pdf

XtremeDSP External RAM



The Xilinx XtremeDSP External RAM block allows System Generator components to connect to the external 256K x 16 ZBT SRAM on the Nallatech BenAdda board when a model is prepared for hardware co-simulation.

The block provides a Simulink simulation model for the memory device. The ports on the block look and behave like ports on a traditional synchronous RAM device. The address port should be driven by an unsigned 18-bit Xilinx fixed-point signal having binary point at position 0. The we port should be driven by a Xilinx Boolean signal. The data port should be driven by a 16-bit Xilinx fixed-point signal. The block drives 16-bit Xilinx fixed-point data values on its output port.

In hardware, components that read from and write to the block in Simulink read from and write to the Micron ZBT SRAM device on the BenAdda board. When a System Generator model that uses an external RAM block is translated into hardware, the ports on the RAM block are translated into top-level input and output ports on the model HDL. The appropriate pin location constraints for these ports are included in the BenAdda constraints file. The ZBT SRAM device uses the same clock as the System Generator portion of the hardware co-simulation implementation.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

Parameters specific to the block are as follows:

- **Output Data Type:** selects the output data type of the RAM. You may choose between unsigned and signed (two's complement) data types.
- **Data Width:** specifies the width of the input data.
- **Data Binary Point:** selects the binary point position of the data values stored as the memory contents. The binary point position must be between 0 and 16 (the data width)

XtremeDSP LED Flasher



The Xilinx XtremeDSP LED Flasher block allows System Generator models to use the tri-color LEDs on the BenADDA board when a model is prepared for co-simulation. When the model is co-simulated, the LEDs will cycle through red, green and yellow colors. The LEDs are driven by the two most significant bits of a 27-bit free running counter. To see the LEDs cycle through the three colors, you should select a free running clock during model simulation.

Block Parameters

The block parameters dialog box can be invoked by double-clicking the icon in your Simulink model.

System Generator Utilities

<code>xlAddTerms</code>	Automatically adds sinks and sources to System Generator models.
<code>xlfa_denominator</code>	Returns the denominator of the filter object in an FDATool block.
<code>xlfa_numerator</code>	Returns the numerator of the filter object in an FDATool block.
<code>xlGenerateButton</code>	Provides a programmatic way to invoke the System Generator code generator.
<code>xlgetparam</code> and <code>xlsetparam</code>	Used to get and set parameter values in a System Generator block.
<code>xlgetparams</code>	Used to get all parameter values in a System Generator block.
<code>xlInstallPlugin</code>	Used to install a System Generator hardware co-simulation plugin.
<code>xlLoadChipScopeData</code>	Loads a chipscope™ data .prn file to the workspace.
<code>xlSBDBuilder</code>	Launches the System Generator Board support Description builder tool.
<code>xlSetNonMemMap</code>	Marks a gateway block as non-memory mapped.
<code>xlSetUseHDL</code>	Sets the 'Use behavioral HDL' option of blocks in a model of a subsystem.
<code>xlSwitchLibrary</code>	Replaces the HDL library references in the target directory with the specified library name.
<code>xlTBUtils</code>	Provides access to several useful procedures available to the Xilinx Toolbar block, such as layout, redrawlines and getselected.
<code>xlTimingAnalysis</code>	Launches the System Generator Timing Analyzer with the specified timing data.
<code>xlUpdateModel</code>	Manages System Generator versions.

xlAddTerms

xlAddTerms is similar to the addterms command in Simulink, in that it adds blocks to terminate or drive unconnected ports in a model. With xlAddTerms, output ports are terminated with a Simulink terminator block, and input ports are correctly driven with either a Simulink or System Generator constant block. Additionally System Generator gateway blocks can also be conditionally added.

The optionStruct argument can be configured to instruct xlAddTerms to set a block's property (e.g. set a constant block's value to 5) or to use different source or terminator blocks.

Syntax

```
xlAddTerms (arg1,optionStruct)
```

Description

In the following description, 'source block' refers to the block that is used to drive an unconnected port. And 'term block' refers to the block that is used to terminate an unconnected port.

```
xlAddTerms (arg1,optionStruct)
```

xlAddTerms takes either 1 or 2 arguments. The second argument, optionStruct argument is optional. The first argument can be the name of a system, or a block list.

arg1	Description
gcs	A string-handle of the current system
'top/test1'	A string-handle of a system called test1. In this case, xlAddTerms is passed a handle to a system. This will run xlAddTerms on all the blocks under test1, including all children blocks of subsystems.
{ 'top/test1' }	A block list of string handles. In this case, xlAddTerms is passed a handle to a block. This will run xlAddTerms only on the block called test1, and will not process child blocks.
{ 't/b1'; 't/b2'; 't/b3' }	A block list of string handles.
[1;2;3]	A block list of numeric handles.

The optionStruct argument is optional, but when included, should be a MATLAB structure. The following table describes the possible values in the structure. The structure field names (as is true with all MATLAB structure field names) are case sensitive.

optionStruct	Description
Source	xlAddTerms can terminate in-ports using any source block (refer to SourceWith field). The parameters of the source block can be specified using the Source field of the optionStruct by passing the parameters as sub-fields of the Source field. The Source field prompts xlAddTerms to do a series of set_params on the source block. Since it is possible to change the type of the source block, it is left to the user to ensure that the parameters here are relevant to the source block in use. E.g. when a Simulink constant block is used as a Source Block, setting the block's value to 10 can be done with: <pre>Source.value = '10'</pre> And when a System Generator Constant block is used as a Source Block, setting the constant block to have a value of 10 and of type UFIX_32_0 can be done with: <pre>Source.const = '10'; Source.arith_type='Unsigned'; Source.bin_pt=0; Source.n_bits=32;</pre>
SourceWith	The SourceWith field allows the source block to be specified. Default is to use a constant block. SourceWith has two sub-fields which must be specified. SourceWithBlock: A string specifying the full path and name of the block to be used. e.g. 'built-in/Constant' or 'xbsIndex_r3/AddSub'. SourceWithPort: A string specifying the port number used to connect. E.g. '1' or '3' Specifying '1' instructs xlAddTerms to connect using port 1, etc.
TermWith	The TermWith Field allows the term block to be specified. Default is to use a Simulink terminator block. TermWith has two sub-fields which must be specified. TermWithBlock: A string specifying the full path and name of the block to be used. e.g. 'built-in/Terminator' or 'xbsIndex_r3/AddSub'. TermWithPort: A string specifying the port number used to connect. E.g. '1' or '3' Specifying '1' instructs xlAddTerms to connect using port 1, etc.
UseGatewayIns	Instructs xlAddTerms to insert System Generator gateway ins when required. The existence of the field is used to denote insertion of gateway ins. This field must not be present if gateway ins are not to be used.

optionStruct	Description
GatewayIn	If gateway ins are inserted, their parameters can be set using this field, in a similar way as for Source and Term. For example, <pre>GatewayIn.arith_type='Unsigned'; GatewayIn.n_bits='32' GatewayIn.bin_pt='0'</pre> will set the gateway in to output a ufix_32_0.
UseGatewayOuts	Instructs xlAddTerms to insert System Generator gateway outs when required. The existence of the field is used to denote insertion of gateway outs. This field must not be present if gateway outs are not to be used.
GatewayOut	If gateway outs are inserted, their parameters can be set using this field, in a similar way as for Source and Term. For example, <pre>GatewayOut.arith_type='Unsigned'; GatewayOut.n_bits='32' GatewayOut.bin_pt='0'</pre> will set the gateway out to take an input of ufix_32_0.
RecurseSubSystems	Instructs xlAddTerm to recursively run xlAddTerm under all child subsystems. Expects a scalar number, 1 or 0.

Examples

Example 1: Runs xlAddTerms on the current system, with the default parameters: constant source blocks are used, and gateways are not added. Subsystems will be recursively terminated.

```
xlAddTerms(gcs);
```

Example 2: runs xlAddTerms on all the blocks in the subsystem tt./mySubsystem.

```
xlAddTerms(find_system('tt/mySubsystem','SearchDepth',1));
```

Example 3: runs xlAddTerms on the current system, setting the source block's constant value to 1, using gateway outs and changing the term block to use a Simulink display block.

```
s.Source.const = '10';
s.UseGatewayOuts = 1;
s.TermWith.Block = 'built-in/Display';
s.TermWith.Port = '1';
s.RecurseSubSystem = 1;
xlAddTerms(gcs,s);
```

Remarks

Note that field names are case sensitive. When using the fields 'Source', 'GatewayIn' and 'GatewayOut', users have to ensure that the parameter names to be set are valid.

See Also

[Toolbar](#), [xlTBUtils](#)

xlfd_a_denominator

The xlfd_a_denominator function returns the denominator of the filter object stored in the Xilinx FDATool block.

Syntax

```
[den] = xlfd_a_denominator(fdablk_name);
```

Description

Returns the denominator of the filter object stored in the Xilinx FDATool block named fdablk_name, or throws an error if the named block does not exist. The block name can be local (e.g. 'FDATool'), relative (e.g. '../../FDATool'), or absolute (e.g. 'untitled/foo/bar/FDATool').

See Also

[xlfd_a_numerator](#), [FDATool](#)

xlfd_a_numerator

The `xlfd_a_numerator` function returns the numerator of the filter object stored in the Xilinx FDATool block.

Syntax

```
[num] = xlfd_a_numerator(fdablk_name);
```

Description

Returns the numerator of the filter object stored in the Xilinx FDATool block named `fdablk_name`, or throws an error if the named block does not exist. The block name can be local (e.g. 'FDATool'), relative (e.g. '../../FDATool'), or absolute (e.g. 'untitled/foo/bar/FDATool').

See Also

[xlfd_a_denominator](#), [FDATool](#)

xlGenerateButton

The xlGenerateButton function provides a programmatic way to invoke the System Generator code generator.

Syntax

```
status = xlGenerateButton(sysgenblock)
```

Description

xlGenerateButton invokes the System Generator code generator and returns a status code. Invoking xlGenerateButton with a System Generator block as an argument is functionally equivalent to opening the System Generator GUI for that token, and clicking on the **Generate** button. The following is list of possible status codes returned by xlGenerateButton.

Status	Description
1	Canceled
2	Simulation running
3	Check param error
4	Compile/generate netlist error
5	Netlister error
6	Post netlister script error
7	Post netlist error
8	Post generation error
9	External view mismatch when importing as a configurable subsystem

See Also

[xlgetparam](#) and [xlsetparam](#), [xlgetparams](#), [System Generator](#) block

xlgetparam and xlsetparam

Used to get and set parameter values in a [System Generator](#) block. Both functions are similar to the Simulink `get_param` and `set_param` commands and should be used instead of the Simulink functions.

Syntax

```
value1, value2, ...] = xlgetparam(sysgenblock, param1, param2, ...)  
  
xlsetparam(sysgenblock, param1, value1, param2, value2, ...)
```

Description

The [System Generator](#) block differs from other blocks in one significant manner; multiple sets of parameters are stored for an instance of a System Generator block. The different sets of parameters stored correspond to different compilation targets available to the System Generator block. The 'compilation' parameter is the switch used to toggle between different compilation targets stored in the System Generator block. In order to get or set parameters associated with a particular compilation type, it is necessary to first use `xlsetparam` to change the 'compilation' parameter to the correct compilation target, before getting or setting further values.

```
[value1, value2, ...] = xlgetparam(sysgenblock, param1, param2, ...)
```

The first input argument of `xlgetparam` should be a handle to the [System Generator](#) block. Subsequent arguments are taken as names of parameters. The output returned will be an array that matched the number of input parameters. If a requested parameter does not exist, the returned value of `xlgetparam` will be empty. The `xlgetparams` function can be used to get all the parameters for the current compilation target.

```
xlsetparam(sysgenblock, param1, value1, param2, value2, ...)
```

The `xlsetparam` function also takes a handle to a System Generator block as the first argument. Subsequent arguments must be provided in pairs, the first should be the parameter name and the second the parameter value.

Examples

Example 1: Changing the synthesis tool used for HDL netlist.

```
xlsetparam(sysgenblock, 'compilation', 'HDL Netlist');  
xlsetparam(sysgenblock, 'synthesis_tool', 'XST')
```

The first `xlsetparam` is used to set the compilation target to 'HDL Netlist'. The second `xlsetparam` is used to change the synthesis tool used to 'XST'.

Example 2: Getting family and part information.

```
[fam,part]=xlgetparam(sysgenblock,'xilinxfamily','part')  
fam =  
Virtex2  
part =  
xc2v1000
```

See Also

[xlGenerateButton](#), [xlgetparams](#)

xlgetparams

The `xlgetparams` command is used to get all parameter values in a [System Generator](#) block associated with the current compilation type. The `xlgetparams` command can be used in conjunction with the `xlgetparam` and `xlsetparam` commands to change or retrieve a System Generator block's parameters.

Syntax

```
paramstruct = xlgetparams(sysgenblk);
```

Description

All the parameters available to a [System Generator](#) block can be retrieved using the `xlgetparams` command. For more information regarding the parameters, please refer to the System Generator block documentation.

```
paramstruct = xlgetparams(sysgenblock);
```

The first input argument of `xlgetparams` should be a handle to the System Generator block. The function returns a MATLAB structure that lists the parameter value pairs.

Examples

Example 1:

```
params=xlsetparams(sysgenblock)
params =
    compilation: 'HDL Netlist'
    compilation_lut: [1x1 struct]
    simulink_period: '1'
    incr_netlist: 'off'
    trim_vbits: 'Everywhere in SubSystem'
    dbl_ovrd: 'According to Block Masks'
    deprecated_control: 'off'
    xilinxfamily: 'Virtex2'
    part: 'xc2v1000'
    speed: '-4'
    package: 'bg575'
    synthesis_tool: 'XST'
    directory: './netlist'
    testbench: 'off'
    sysclk_period: '100'
    core_generation: 'According to Block Masks'
    run_coregen: 'off'
    eval_field: '0'
    clock_loc: ''
    synthesis_language: 'VHDL'
```

The `compilation_lut` parameter is another structure that lists the other compilation types that are stored in this System Generator block. Using `xlsetparam` to set the compilation type will allow the parameters associated with that compilation type to be visible to either `xlgetparams` or `xlgetparam`.

See Also

[xlGenerateButton](#), [xlgetparam](#) and [xlsetparam](#)

xlInstallPlugin

This function installs the specified System Generator hardware co-simulation plugin. Once the installer has completed, the new compilation target may be selected from the System Generator block dialog box.

Syntax

```
xlInstallPlugin('<plugin_name>')
```

Description

This function accepts one parameter, plugin, which contains the name of the plugin file to install. The plugin parameter can include path information if desired, and the .zip extension is optional.

Examples

Example 1:

```
xlInstallPlugin('plugin.zip')
```

Example 2:

```
xlInstallPlugin('plugin')
```

See Also

[Hardware Co-Simulation Installation](#), [Supporting New Platforms](#), [xlSBDBuilder](#)

xlLoadChipScopeData

The xlLoadChipScopeData function loads a ChipScope Pro™ .prn files, creates workspace variables and conditionally plots the results.

Syntax

```
status = xlLoadChipScopeData(filename, plotResults);
```

Description

Load the .prn file specified in filename, and plots the results if plotResults == 1. Returns a status of -1 if the file specified in filename cannot be found. Returns a status of 0 on success. Note: Only signed and unsigned decimal numbers are supported.

Examples

Example 1:

```
xlLoadChipScopeData('SineWave.prn', 0);
```

See Also

[ChipScope](#) block

xISBDBuilder


The System Generator Board Description (SBD) Builder application aids the designing of new JTAG hardware co-simulation plugins by providing a graphical user interface that prompts for relevant information about the co-simulation platform.

Syntax

```
xISBDBuilder;
```

Description

After invoking SBDBuilder, the main dialog box will appear as shown below:

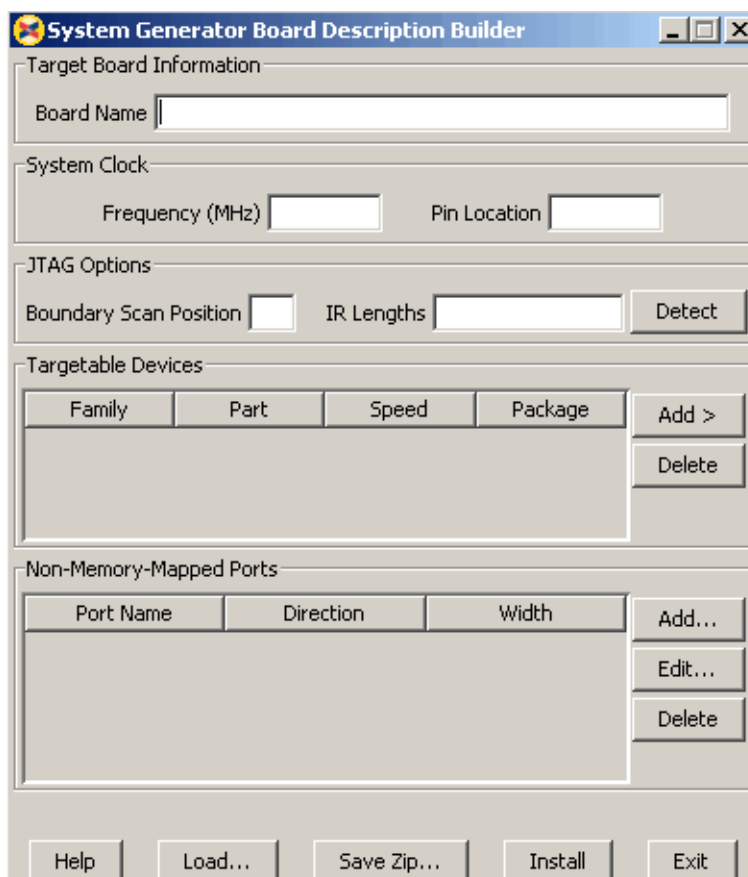

Once the main dialog box is open, you may create a board support package by filling in the required fields described below:

Board Name: Tells a descriptive name of the board. This is the name that will be listed in System Generator when selecting your JTAG hardware co-simulation platform for compilation.

System Clock: JTAG hardware co-simulation requires an on-board clock to drive the System Generator design. The fields described below specify information about the board's system clock:


- **Frequency (MHz):** Specifies the frequency of the on-board system clock in MHz.
- **Pin Location:** Specifies the FPGA input pin to which the system clock is connected.

JTAG Options: System Generator needs to know several things about the FPGA board's JTAG chain to be able to program the FPGA for hardware co-simulation. The topic [Obtaining Platform Information](#) describes how and where to find the information required for these fields. If you are unsure of the specifications of your board, please refer to the manufacturer's documentation. The fields specific to JTAG Options are described below:

- **Boundary Scan Position:** Specifies the position of the target FPGA on the JTAG chain. This value should be indexed from 1. (e.g. the first device in the chain has an index of 1, the second device has an index of 2, etc.)
- **IR Lengths:** Specifies the lengths of the instruction registers for all of the devices on the JTAG chain. This list may be delimited by spaces, commas, or semicolons.
- **Detect:** This action attempts to identify the IR Lengths automatically by querying the FPGA board. The board must be powered and connected to a Parallel Cable IV for this to function properly. Any unknown devices on the JTAG chain will be represented with a "?" in the list, and must be specified manually.

Targetable Devices: This table displays a list of available FPGAs on the board for programming. This is not a description of all of the devices on the JTAG chain, but rather a description of the possible devices that may exist at the aforementioned boundary scan position. For most boards, only one device needs to be specified, but some boards may have alternate, e.g., a choice between an xcv1000 or an xcv2000 in the same socket. Use the **Add** and **Delete** buttons described below to build the device list:

- **Add:** Brings up a menu to select a new device for the board. As shown in the figure below, devices are organized by family, then part name, then speed, and finally the package type.
- **Delete:** Remove the selected device from the list.

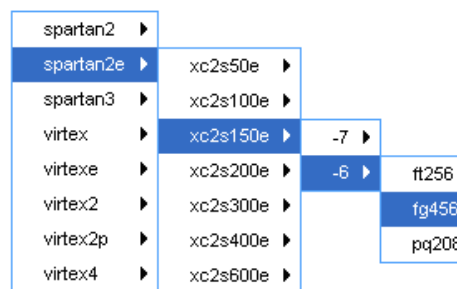

Non-Memory-Mapped Ports: You can add support for your own board-specific ports when creating a board support package. Board-specific ports are useful when you have on-board components (e.g., external memories, DACs, or ADCs) that you would like the FPGA to interface to during hardware co-simulation. Board specific ports are also referred to as non-memory-mapped because when the design is compiled for hardware co-simulation, these ports will be mapped to their physical locations, rather than creating Simulink ports. See [Specifying Non-Memory Mapped Ports](#) for more information. The **Add**, **Edit**, and **Delete** buttons provide the controls needed for configuring non-memory mapped ports.

- **Add:** Brings up the dialog to enter information about the new port.
- **Edit:** Make changes to the selected port.
- **Delete:** Remove the selected port from the list.

Help: Displays this documentation.

Load: Fill in the form with values stored in an SBDBuilder Saved Description XML file. This file is automatically saved with every plugin that you create, so it is useful for reloading old plugin files for easy modification.

Save Zip: Prompts you for a filename and a target pathname. This will create a zip file with all of the plugin files for System Generator. The zip will be in a suitable format for passing to the System Generator [xlInstallPlugin](#) function.

Exit: Quit the application.

See Also

[Hardware Co-Simulation Installation](#), [Supporting New Platforms](#), [xlInstallPlugin](#)

xlSetNonMemMap

Sets a Gateway In or Gateway Out block to be used as a non memory mapped port when doing hardware co-simulation. This option is often used when a Gateway is intended to be routed to hardware external to the FPGA, instead of being routed to the hardware co-simulation memory map.

Syntax

```
xlSetNonMemMap(block, company, project)
```

Description

A call to xlSetNonMemMap must be made with at least three parameters. The first is the name or handle of the gateway that is to be marked as non memory mapped. The marking of a gateway as non memory mapped is predicated upon a company and project name. The second and third parameters are strings that identify the company and project names.

Examples

Example 1:

```
xlSetNonMemMap(gcbh, 'Xilinx', 'jtaghwcosim');
```

The first parameter in the example returns the handle of the block that is currently selected. That gateway is marked as non memory mapped when generating for Xilinx JTAG hardware co-simulation.

Example 2:

```
xlSetNonMemMap(gcbh, 'Nallatech', 'xdspkit');
```

The first parameter in the example returns the handle of the block that is currently selected. That gateway is marked as non memory mapped when generating for Nallatech's xTreme DSP kit.

See Also

[Using Hardware Co-Simulation](#), [Supporting New Platforms](#)

xlSetUseHDL

This function sets the 'Use behavioral HDL' option of blocks in a model or subsystem.

Syntax

```
xlSetUseHDL(system, mode)
```

Description

The model or system specified in the parameter system will be set to either use cores or behavioral HDL, depending on the mode. Mode is a number, where 0 refers to using cores, and 1 refers to using behavioral HDL.

Examples

Example 1:

```
xlSetUseHDL(gcs, 0)
```

This call sets the currently selected system to use cores.

See Also

[xlSetNonMemMap](#), [xlSBDBuilder](#)

xlSwitchLibrary

Replaces the HDL library references in the target directory with the specified library name.

Syntax

```
xlSwitchLibrary(<target_directory>, <from_library_name>,  
<to_library_name>)
```

Description

Replaces all HDL library references to <from_library_name>, with <to_library_name> in a System Generator design located in directory <target_directory>.

Examples

Example 1:

The following command runs `xlSwitchLibrary` on a target directory created by System Generator named `'.\netlist'` and switches the default library from `'work'` to `'design1'`:

```
>> xlSwitchLibrary('.\netlist_w_dcm', 'work', 'design1')  
INFO: Switching HDL library references in design 'basicmult_dcm_mcw'  
...  
INFO: A backup of the original files can be found at  
'D:\Matlab\work\Basic\netlist_w_dcm\switch_lib_backup.TlOy'.  
INFO: Processing file 'basicmult.vhd' ...  
INFO: Processing file 'basicmult_mcw.vhd' ...  
INFO: Processing file 'basicmult_dcm_mcw.vhd' ...  
INFO: Processing file 'xst_basicmult.prj' ...  
INFO: Processing file 'vcom.do' ...  
INFO: Processing file 'vsim.do' ...  
INFO: Processing file 'pn_behavioral.do' ...  
INFO: Processing file 'pn_posttranslate.do' ...  
INFO: Processing file 'pn_postmap.do' ...  
INFO: Processing file 'pn_postpar.do' ...  
INFO: Processing file 'basicmult_dcm_mcw.ise' ...
```

xlTBUtils

The xlTBUtils command provides access to several features of the Xilinx block. This includes access to the layout, rerouting functions and to functions that return selected blocks and lines.

Syntax

```
xlTBUtils(function, args)
e.g.
xlTBUtils('ToolBar')
xlTBUtils('Layout',struct('verbose',1,'autoroute',0))
xlTBUtils('Layout',optionStruct)
xlTBUtils('RedrawLines',struct('autoroute',0))
xlTBUtils('RedrawLines',optionStruct)
[lines,blks]=xlTBUtils('GetSelected','All')
```

Description

xlTBUtils(function [,args])

xlTBUtils is a collection of functions that are used by the Xilinx Toolbar block. The function argument specifies the name of the function to execute. Further arguments (if required) can be tagged on as supplementary arguments to the function call. Note that the function argument string is not case sensitive. Possible values are enumerated below and explained further in the relevant subtopics.

Function	Description
'ToolBar'	Launches the Xilinx Toolbar GUI. If the GUI is already open, it will be brought to the front.
'Layout'	Runs the layout algorithm on a model to place and reroute lines on the model. Layout can be customized using the option structure that is detailed below.
'RedrawLines'	Runs the routing algorithm on a model to reroute lines on the model. RedrawLines can be customized using the option structure detailed below.
'GetSelected'	Returns MATLAB Simulink handles to blocks and lines that are selected on the system in focus

'xlTBUtils('Layout',optionStruct)

Automatically places and routes a Simulink model. optionStruct is a MATLAB struct data-type, that contains the parameters for Layout. The optionStruct argument is optional.

Layout expects circuits to be placed left to right. After placement, Layout uses Simulink to autoroute the wire connections. Simulink will route avoiding anything visible on screen, including block labels. Setting "ignore_labels" will 'allow' Simulink to route over labels –

after which it is possible to manually move the labels to a more reasonable location. Note that field names are case sensitive.

Field Names	Description [Default values]
x_pitch, y_pitch	The gaps (pitch) between block (pixels). x_pitch specifies the amount of spacing to leave between blocks horizontally, and y_pitch specifies vertical spacing. [30].
x_start, y_start	Left (x_start) and top(y_start) margin spacing (pixels). The amount of spacing to leave on the left and top of a model. [10].
autoroute	Turns on Simulink auto-routing of lines. (1 0) [1]
ignore_labels	When auto-routing lines, Simulink will attempt to auto-route around text labels. Setting ignore_labels to 1 will minimize text label size during the routing process.
sys	Name of the system to layout. [gcs]
verbose	When set to 1, a wait bar will be shown during the layout process.

xITBUtils('RedrawLines',optionStruct)

The RedrawLines command will redraw all lines in a Simulink model. If there are lines selected, only selected lines are redrawn otherwise all lines are redrawn. If a branch is selected, the entire line will be redrawn; main trunk and all other sub-branches.

Field Names	Description [Default values]
autoroute	Turns on Simulink auto-routing of lines. (1 0) [1]
sys	Name of the system to layout. [gcs]

[lines,blks]=xITBUtils('GetSelected',arg)

The GetSelected command returns handles to selected blocks and lines of the system in focus. The argument arg is optional. It should be a one of the string values described in the table below.

Field Names	Description [Default values]
'all'	Gets both selected lines and blocks (default).
'lines'	Gets only selected lines.
'blocks'	Gets only selected blocks.

The GetSelected command will return an array with two items, an array of a structure containing line information (lines) and an array of block handles (blks). If the 'lines' argument is used, blks will be an empty array; similarly when the 'blocks' argument is used, lines will be an empty array.

Examples

Example 1a: Performing Layouts

```
a.verbose = 1;
a.autoroute = 0;
xlTBUtils('Layout',a);
```

This will invoke the layout tool with verbose on and autoroute off.

Example 1b: Performing Layouts

```
xlTBUtils('Layout',struct('verbose',1,'autoroute',0));
```

This will also invoke the layout tool with verbose on and autoroute off.

Example 2: Redrawing lines

```
xlTBUtils('Redrawlines',struct('autoroute',0));
```

This will redraw the lines of the current system, with auto-routing off.

Example 3: Getting selected lines and blocks

```
[lines,blks]=xlTBUtils('GetSelected')
lines =
```

1x3 struct array with fields:

```
Handle
Name
Parent
SrcBlock
SrcPort
DstBlock
DstPort
Points
Branch
```

```
blks =
```

```
1.0e+003 *
```

```
3.0320
3.0480
```

This will return all selected lines and blocks in the current system. In this case, 3 lines and 2 blocks were selected. The first line handle can be accessed via the command

```
lines(1).Handle
```

```
ans =
```

```
3.0740e+003
```

The handle to the first block can be accessed via the command

```
blks(1)
```

```
ans =
```

```
3.0320e+003
```

Remarks

The actions performed by Layout and RedrawLines will not be in the undo stack. Save a copy of the model before performing the actions, in order to revert to the original model.

This product contains certain software code or other information ("AT&T Software") proprietary to AT&T Corp. ("AT&T"). The AT&T Software is provided to you "AS IS". YOU ASSUME TOTAL RESPONSIBILITY AND RISK FOR USE OF THE AT&T SOFTWARE. AT&T DOES NOT MAKE, AND EXPRESSLY DISCLAIMS, ANY EXPRESS OR IMPLIED WARRANTIES OF ANY KIND WHATSOEVER, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WARRANTIES OF TITLE OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, ANY WARRANTIES ARISING BY USAGE OF TRADE, COURSE OF DEALING OR COURSE OF PERFORMANCE, OR ANY WARRANTY THAT THE AT&T SOFTWARE IS "ERROR FREE" OR WILL MEET YOUR REQUIREMENTS.

Unless you accept a license to use the AT&T Software, you shall not reverse compile, disassemble or otherwise reverse engineer this product to ascertain the source code for any AT&T Software.

© AT&T Corp. All rights reserved. AT&T is a registered trademark of AT&T Corp.

See Also

[Toolbar](#), [xlAddTerms](#)

xlTimingAnalysis

The System Generator timing analyzer GUI is typically launched by using the Timing Analysis compilation target from the System Generator GUI in MATLAB. The xlTimingAnalysis MATLAB command is another way of launching the timing analyzer GUI. The Timing Analysis compilation target causes the tool to compile the design, run place and route, and perform other operations prior to displaying the timing analyzer GUI. By using the xlTimingAnalysis command, it is possible to launch the GUI on previously generated timing data without performing the additional operations of the compilation target.

Syntax

```
xlTimingAnalysis(target_directory);
```

Description

Calling xlTimingAnalysis with the name of a directory that contains timing data will launch the System Generate Timing Analyzer GUI.

The timing analyzer GUI will display the data that is contained in the timing.twx and name_translations data files in the specified target directory.

The target directory name may be either a relative or an absolute path name.

Example

```
>> xlTimingAnalysis('timing')
```

Where 'timing' is the name of the target directory in which a prior timing analysis was carried out.

xIUpdateModel

If you have a model that was created in System Generator v7.1 or earlier, you must update the model to be compatible with v9.1.01 and beyond. To update a model, you run the MATLAB command `xIUpdateModel` that invokes a conversion script.

Please be advised that the conversion script does not automatically save an old version of your model as it updates the design nor save a new version of your model after conversion. You can either make a back up copy of your model before running the conversion script, or you can save the updated model with a new name.

Some models may require some manual modification after running `xIUpdateModel`. The function will point out any necessary changes that must be made manually.

Syntax

```
xIUpdateModel('my_model_name');
xIUpdateModel('my_model_name', 'lib');
xIUpdateModel('my_model_name', 'assert');
```

Description

Updating v2.x and Prior Models

If you are upgrading from versions of System Generator earlier than **v3.1**, you must obtain System Generator v7.x and update your models to v7.x before you can update them to v9.1.01.

Updating v3.x, v6.x and v7.x Models

This section describes the process of upgrading a Xilinx System Generator v3.x, v6.x or v7.x model to work with v9.1.01.

Note: Any reference to v3.x or v6.x in this section can be used interchangeably with v7.x.

The basic steps for upgrading a v7.x model to v9.1.01 is as follows: 1) Save a backup copy of your v7.1 model and user-defined libraries that your model uses 2) Run `xIUpdateModel` on any libraries first and then on your model 3) Read the report produced by `xIUpdateModel` and follow the instructions 4) Check that your model runs under v9.1.01.

These steps are described in greater detail below.

1. Save a backup copy of your v7.1 model and user-defined libraries that your model uses.
2. Run the `xIUpdateModel` Function

From the MATLAB console, `cd` into the directory containing your model. If the name of your model is `designName.mdl`, type `xIUpdateModel('designName')`.

The `xIUpdateModel` function performs the following tasks:

- ◆ Updates each block in your v7.x design to a corresponding v9.1.01 block with equivalent settings.
- ◆ Writes a report explaining all of the changes that were made. This report enumerates changes you may need to make by hand to complete the update.

In most cases, `xlUpdateModel` produces an equivalent v9.1.01 model. However, there are a few constructs that may require you to edit your model. It is important that you read the report and follow the remaining steps in this section.

3. Read the `xlUpdateModel` report and Follow the Instructions

If the report contains the issues listed below, manual intervention will be required to complete the conversion.

a. Xilinx System Generator v7.x models containing removed blocks

The following blocks have been removed from System Generator: CIC, Clear Quantization Error, Digital Up Converter, J.83 Modulator, Quantization Error, Sync.

b. Xilinx System Generator v7.x Models that Contain Deprecated Blocks

The DDSv4.0 block still exist in System Generator, but has been deprecated:

c. Xilinx System Generator v7.x Models Utilizing Explicit Sample Periods

The explicit sample period fields have been removed from most non-source blocks in System Generator v9.1.01. Source blocks (e.g., Counter block) continue to allow the specification of explicit sample periods. When upgrading models containing feedback loops, Assert blocks must typically be added by hand after `xlUpdateModel` has been run. This is necessary in order to help System Generator determine appropriate rates and types for the path. The following error message is an indication that an Assert block is required:

“The data rates could not be established for the feedback paths through this block. You may need to add Assert blocks to instruct the system”

In such a case, you should augment each feedback loop with an Assert block, and specify rates and types explicitly on this block.

The update script will annotate the converted model wherever the v7.1 model asserted an explicit period. In the converted model, you will most often not need to insert Assert blocks. To find out where you need them, try to update the diagram (the Update Diagram control is under the Edit menu). If rates do not resolve, you will need to insert one or more Assert blocks.

The update script can be configured to automatically insert Assert blocks immediately following blocks configured with an explicit sample period setting. To use this option, run the following command:

```
xlUpdateModel (designName, 'assert')
```

4. Save and Close the updated model.

If you did not previously make a backup copy of the old model, you can save the updated model under a new name to preserve the old model.

5. Verify that Your model Runs Under System Generator v9.1.01.

If you have followed the instructions in the previous steps, your model should run with System Generator v9.1.01. Open the model with System Generator v9.1.01 and run it.

Examples

Example 1:

```
>> xlUpdateModel('my_model_name');
```

Update the file `my_model_name.mdl` that is located in the current working directory.

Example 2:

```
>> xlUpdateModel('my_model_name','lib');
```

Update the file `my_model_name.mdl` that is located in the current working directory, along with the libraries that are associated with the model.

Example 3:

```
>> xlUpdateModel('my_model_name','assert');
```

Update the file `my_model_name.mdl` that is located in the current working directory. Add **Assert** blocks where necessary.

xlVersion

It is possible to have multiple versions of System Generator installed. The MATLAB command `xlVersion` displays which versions are installed, and makes it possible to switch from one to another. Occasionally, it is necessary to restart MATLAB to make it possible to switch versions; the `xlVersion` command will instruct you to do so in these cases.

If you install System Generator 8.1 after you install 8.2, you need to install 8.2 again in order to make `xlVersion` work.

Syntax

```
xlVersion;  
xlVersion ver;  
xlVersion -add directory;
```

Description

A call to `xlVersion` with no parameters will display the current version of System Generator installed, and also all available versions.

The `ver` option specifies the version of System Generator to switch to.

The `-add` option allows a directory to be specified. The directory is expected to hold a System Generator installation. The specified instance of System Generator will be loaded as the current working System Generator installation.

See Also

[Real-Time Signal Processing using Hardware Co-Simulation](#)

Programmatic Access

System Generator API for Programmatic Generation

Introduction

A script of System Generator for programmatic generation (PG API script) is a MATLAB M-function file that builds a System Generator subsystem by instantiating and interconnecting **xBlock**, **xSignal**, **xInport**, and **xOutport** objects. It is a programmatic way of constructing System Generator diagrams (i.e., subsystems). As will be demonstrated below with examples, the top-level function of a System Generator programmatic script is its entry point and must be invoked through an **xBlock** constructor. Upon constructor exit, MATLAB adds the corresponding System Generator subsystem to the corresponding model. If no model is opened, a new “untitled” model will be created and the System Generator subsystem is inserted into it.

The **xBlock** constructor creates an **xBlock** object. The object can be created from a library block or it can be a subsystem. An **xSignal** object corresponds to a wire that connects a source block to a target. An **xInport** object instantiates a Simulink Inport and an **xOutport** object instantiates a Simulink Outport.

The API also has one helper function, **xlsub2script** which converts a Simulink diagram to a programmatic generation script.

The API works in three modes: *learning mode*, *production mode*, and *debugging mode*. The learning mode allows you to type in the commands without having a physical script file. It is very useful when you learn the API. In this mode, all blocks, ports, and subsystems will be added into a Simulink model named “untitled”. Please remember to run **xBlock** without any argument or to close the untitled model before starting a new learning session. The production mode has an M-function file and is invoked through the **xBlock** constructor. You will have a subsystem generated. The subsystem can be either in the existing model or can be inserted in a new model. The debugging mode works the same as the production mode except that every time a new object is created or a new connection is established, the Simulink diagram is rerouted. It is very useful when you debug the script that you set some break points in the script or single step the script.

xBlock

The `xBlock` constructor creates an `xBlock` object. The object can be created from a library block or it can be a subsystem. The `xBlock` constructor can be used in three ways:

- to add a leaf block to the current subsystem,
- to add a subsystem to the current subsystem,
- to attach a top-level subsystem to a model.

The `xBlock` takes four arguments and is invoked as follows.

```
block = xBlock(source, params, inports, outports);
```

If the source argument is a string, it is expected to be a library block name. If the source block is in the `xbsIndex_r4` library or in the Simulink built-in library, you can use the block name without the library name. For example, calling `xBlock('AddSub', ...)` is equivalent to `xBlock('xbsIndex_r4/AddSub', ...)`. For a source block that is not in the `xbsIndex_r4` library or built-in library, you need to use the full path, for example, `xBlock('xbsTest_r4/Assert_Relation', ...)`. If the source argument is a function handle, it is interpreted as a PG API function. If it is a MATLAB struct, it is treated as a configuration struc to specify how to attach the top-level to a model.

The `params` argument sets up the parameters. It can be a cell array for position-based binding or a MATLAB struct for name-based binding. If the source parameter is a block in a library, this argument must be a cell array. If the source parameter is a function pointer, this argument must be a cell array.

The `inports` and `outports` arguments specify how subsystem input and output ports are bound. The binding can be a cell array for position-based binding or a MATLAB struct for name-based binding. When specifying an input/output binding, an element of a cell array can be an `xSignal`, an `xInport`, or an `xOutport` object. If the port binding argument is a MATLAB struct, a field of the struct is a port name of the block, a value of the struct is the object that the port is bound to.

The two port binding arguments are optional. If the arguments are missing when constructing the `xBlock` object, the port binding can be specified through the `bindParam` method of an `xBlock` object. The `bindParam` method is invoked as follows:

```
block.bindPort(inports, outports)
```

where `inports` and `outports` arguments specify the input and output port binding. In this case, the object block is create by `xBlock` with only two arguments, the source and the parameter binding.

Other `xBlock` methods include the following.

- `names = block.getOutputNames` returns a cell array of output names,
- `names = block.getInportNames` returns a cell array of inport names,
- `nin = block.getNumInports` returns the number of inports,
- `nout = block.getNumoutports` returns the number of outports.
- `insigs = block.getInSignals` returns a cell array of in coming signals
- `outsigs = block.getOutSignals` returns a cell array of out going signals

xInport

An xInport object represents a subsystem input port.

The constructor

```
port = xInport(port_name)
```

creates an xInport object with name port_name,

```
[port1, port2, port3, ...] = xInport(name1, name2, name2, ...)
```

creates a list of input port with names, and

```
port = xInport
```

creates an input port with an automatically generated name.

An xInport object can be passed for port binding.

METHODS

```
outsigs = port.getOutSignals
```

returns a cell array of out going signals.

xOutport

An xOutport object represents a subsystem output port.

The constructor

```
port = xOutport(port_name)
```

creates an xOutport object with name port_name,

```
[port1, port2, port3, ...] = xOutport(name1, name2, name2, ...)
```

creates a list of output port with names, and

```
port = xOutport
```

creates an output port with an automatically generated name.

An xOutport object can be passed for port binding.

METHODS

```
port.bind(obj)
```

connects the object to port, where port is an xOutport object and obj is an xSignal or xInport object.

```
insigs = port.getInSignals
```

returns a cell array of incoming signals.

xSignal

An xSignal represents a signal object that connects a source to targets.

The constructor

```
sig = xSignal(sig_name)
```

creates an xSignal object with name sig_name,

```
[sig1, sig2, sig3, ...] = xSignal(name1, name2, name2, ...)
```

creates a list of signals with names, and

```
sig = xSignal
```

creates an xSignal for which a name is automatically generated.

An xSignal object can be passed for port binding.

METHODS

```
sig.bind(obj)
```

connects the obj to sig, where sig is an xSignal object and obj is an xSignal or an xInport object.

```
src = sig.getSrc
```

returns a cell array of the source objects that are driving the xSignal object. The cell array can have at most one element. If the source is an input port, the source object will be an xInport object. If the source is an output port of a block, the source object will be a struct, having two fields block and port. The block field is an xBlock object and the port field is the port index.

```
dst = sig.getDst
```

returns a cell array of the destination objects that the xSignal object is driving. Each element can be either a struct or an xOutport object. It is defined same as the return value of the getSrc method.

xlsub2script

xlsub2script is a helper function that converts a subsystem into the top level of a Sysgen script.

xlsub2script(subsystem) converts the subsystem into the top-level script. The argument can also be a model.

By default, the generated M-function file is named after the name of the subsystem with white spaces replaced with underscores. Once the xlsub2script finishes, a help message will guide you how to use the generated script. The main purpose of this xlsub2script function is to make learning Sysgen Script easier. This is also a nice utility that allows you to construct a subsystem using graphic means and then convert the subsystem to a PG API M-function.

xlsub2script(block), where block is a leaf block, prints out the xBlock call that creates the block.

The following are the limitations of `xlsb2script`.

- If the subsystem has mask initialization code that contains function calls such as `gcb`, `set_param`, `get_param`, `add_block`, and so on, the function will error out and you must modify the mask initialization code to remove those Simulink calls.
- If there is an access to global variables inside the subsystem, you need add corresponding mask parameters to the top subsystem that you run the `xlsb2script`.
- If a block's link is broken, that block will be skipped.

`xlsb2script` can also be invoked as the following:

```
xlsb2script(subsystem, options)
```

where `options` is a MATLAB struct. The `options` struct can have two fields: `forcewrite`, and `basevars`.

If `xlsb2script` is invoked for the same subsystem the second time, `xlsb2script` will try to overwrite the existing M-function file. By default, `xlsb2script` will pop up a question dialog asking whether to overwrite the file or not. If the `forcewrite` field of the `options` argument is set to be true or 1, `xlsb2script` will overwrite the M-function file without asking.

Sometimes a subsystem is depended on some variables in the MATLAB base workspace. In that case, when you run `xlsb2script`, you want `xlsb2script` to pick these base workspace variables and generate the proper code to handle base workspace variables. The `basevars` field of the `options` argument is for that purpose. If you want `xlsb2script` to pick up every variable in the base workspace, you need to set the `basevars` field to be `'all'`. If you want `xlsb2script` to selectively pick up some variables, you can set the `basevars` field to be a cell array of strings, where each string is a variable name.

The following are examples of calling `xlsb2script` with the `options` argument:

```
xlsb2script(subsystem, struct('forcewrite', true));
xlsb2script(subsystem, struct('forcewrite', true, 'basevars',
                                'all'));

options.basevars = {'var1', 'var2', 'var3'};
xlsb2script(subsystem, options);
xlsb2script(subsystem, struct('basevars', {'var1', 'var2',
                                            'var3'}));
```

Note: In MATLAB, if the field of a struct is a cell array, when you call the `struct()` function call, you need the extra `{}`.

xBlockHelp

`xBlockHelp(<block_name>)` prints out the parameter names and the acceptable values for the corresponding parameters. When you execute `xBlockHelp` without a parameter, the available blocks in the `xbsIndex_r4` library are listed..

For example, when you execute the following in the MATLAB command line:

```
xBlockHelp('AddSub')
```

You'll get the following table in the transcript:

'xbsIndex_r4/AddSub' Parameter Table

Parameter	Acceptable value	Type
=====	=====	=====
mode	'Addition'	String
	'Subtraction'	
	'Addition or Subtraction'	
-----	-----	-----
use_carryin	'off'	String
	'on'	
-----	-----	-----
use_carryout	'off'	String
	'on'	
-----	-----	-----
en	'off'	String
	'on'	
-----	-----	-----
latency	An Int value	Int
-----	-----	-----
precision	'Full'	String
	'User Defined'	
-----	-----	-----
arith_type	'Signed (2's comp)'	String
	'Unsigned'	
-----	-----	-----
n_bits	An Int value	Int
-----	-----	-----
bin_pt	An Int value	Int
-----	-----	-----
quantization	'Truncate'	String
	'Round (unbiased: +/- Inf)'	
-----	-----	-----
overflow	'Wrap'	String
	'Saturate'	
	'Flag as error'	
-----	-----	-----
use_behavioral_HDL	'off'	String
	'on'	
-----	-----	-----
pipelined	'off'	String
	'on'	
-----	-----	-----
use_rpm	'off'	String
	'on'	
-----	-----	-----


PG API Examples

Hello World

In this example, you will be running the PG API in the *learning* mode where you can type the commands in the MATLAB command shell.

1. To start a new learning session, in MATLAB command console, run: `xBlock`.
2. Type the following three commands in MATLAB command console to create a new subsystem named 'Subsystem' inside a new model named 'untitled'.

```
[a, b] = xImport('a', 'b');  
s = xOutput('s');  
adder = xBlock('AddSub', struct('latency', 1), {a, b}, {s});
```

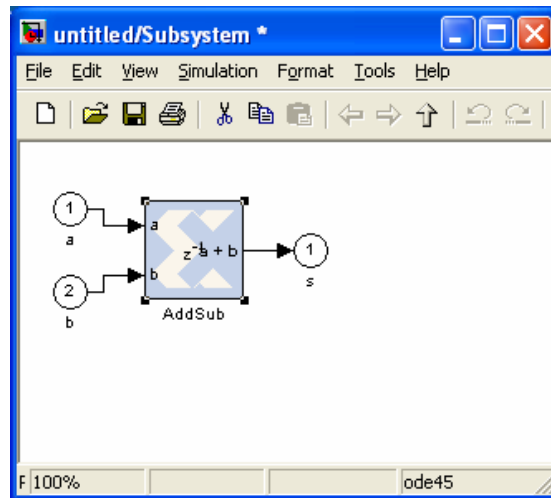

The above commands create the subsystem with two Simulink Inports *a* and *b*, an adder block having a latency of one, and a Simulink Outport *s*. The two Inports source the adder which in turn sources the subsystem outport. The AddSub parameter refers to the AddSub block inside the `xbsIndex_r4` library. By default, if the full block path is not specified, `xBlock` will search `xbsIndex_r4` and built-in libraries in turn. The library must be loaded before using `xBlock`. So please use `load_system` to load the library before invoking `xBlock`.


Debugging tip: If you type `adder` in the MATLAB console, System Generator will print a brief description of the adder block to the MATLAB console and the block will be highlighted in the Simulink diagram. Similarly, you can type `a`, `b`, and `s` to highlight subsystem Inports and Outports.

MACC

1. Run this example in the learning mode. To start a new learning session, run: `xBlock`.
2. Type the following commands in the MATLAB console window to create a multiply-accumulate function in a new subsystem.

```
[a, b] = xInport('a', 'b');
mac = xOutport('mac');
m = xSignal;
mult = xBlock('Mult', struct('latency', 0, 'use_behavioral_HDL', 'on'),
{a, b}, {m});
acc = xBlock('Accumulator', struct('rst', 'off', 'use_behavioral_HDL',
'on'), {m}, {mac});
```

By directing System Generator to generate behavioral HDL, the two blocks should be packed into a single DSP48 block. As of this writing, XST will do so only if you force the multiplier block to be combinational.

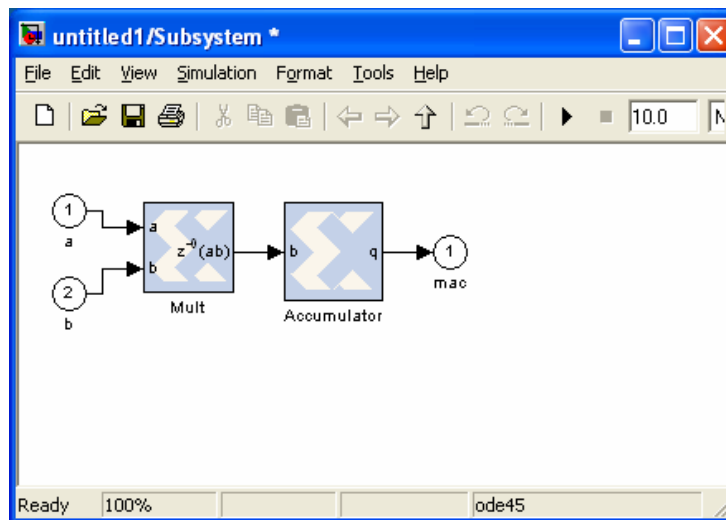

Note: If you don't close the model that is created in example 1, example 2 will be created in a model named *untitled1*. Otherwise, a new model *untitled* will be created for this example.

Debugging tip: The PG API provides functions to get information about blocks and signals in the generated subsystem. After each of the following commands, observe the output in the MATLAB console and the effect on the Simulink diagram.


```
mult_ins = mult.getInSignals
mult_ins{1}
mult_ins{2}
src_a = mult_ins{1}.getSrc
src_a{1}
m_dst = m.getDst
m_dst{1}
m_dst{1}.block
```


MACC in a Masked Subsystem


If you want a particular subsystem to be generated by the PG API and pass parameters from the mask parameters of that subsystem to PG API, you need to run the PG API in *production* mode, where you need to have a physical M-function file and pass that function to the xBlock constructor.

1. First create the top-level PG API M-function file MACC_sub.m with the following lines.

```
function MACC_sub(latency, nbits)
[a, b] = xInport('a', 'b');
mac = xOutport('mac');
if latency <= 0
    error('latency must be positive');
elseif latency == 1
    a_in = a; b_in = b;
else
    [a_in, b_in] = xSignal;
    dblock1 = xBlock('Delay', struct('latency', latency - 1,
    'reg_retiming', 'on'), {a}, {a_in});
    block2 = xBlock('Delay', struct('latency', latency - 1,
    'reg_retiming', 'on'), {b}, {b_in});
end
m = xSignal;
mult = xBlock('Mult', struct('latency', 0, 'use_behavioral_HDL', 'on'),
{a_in, b_in}, {m});
acc = xBlock('Accumulator', struct('rst', 'off', 'n_bits', nbits,
'use_behavioral_HDL', 'on'), {m}, {mac});
```

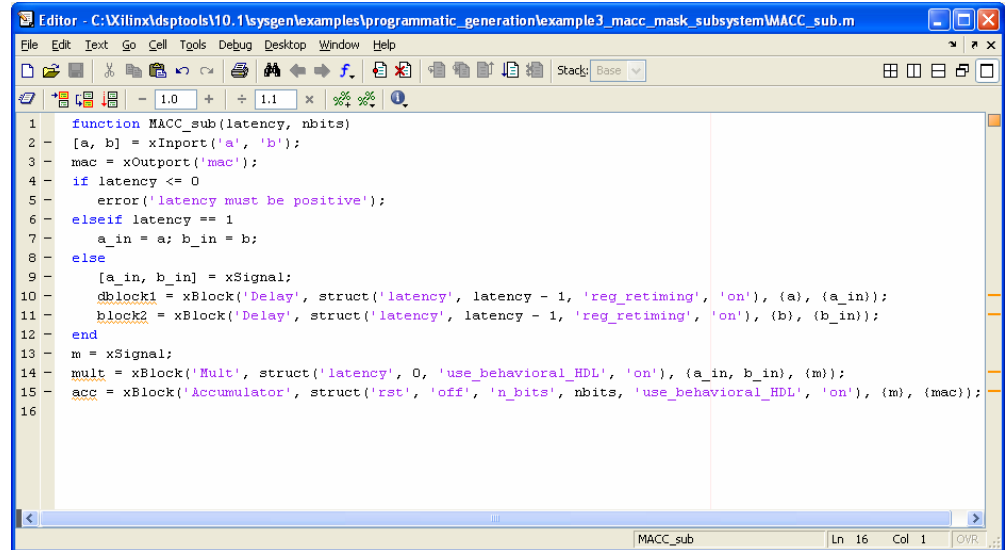


- To mask the subsystem defined by the script, add two mask parameters latency and nbits.

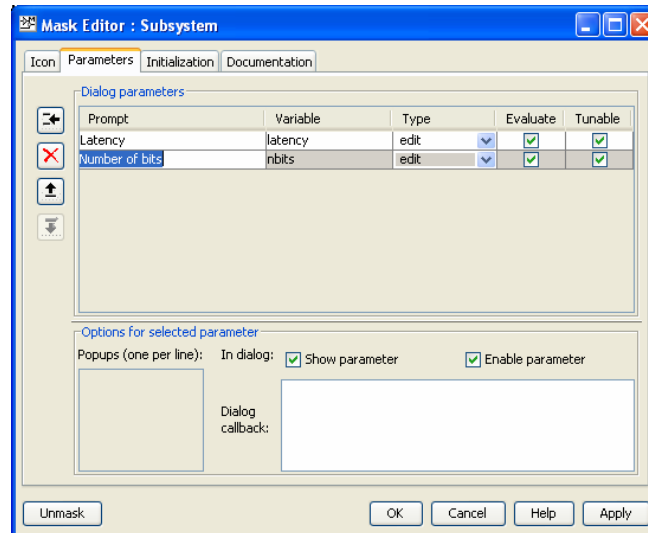

- Then put the following lines to the mask initialization of the subsystem.

```
config.source = str2func('MACC_sub');
config.toplevel = gcb;
xBlock(config, {latency, nbits});
```

In the *production* mode, the first argument of the `xBlock` constructor is a MATLAB struct for configuration, which must have a `source` field and a `toplevel` field. The `source` field is a function pointer points to the M-function and the `toplevel` is string specifying the Simulink subsystem. If the top-level field is 1, an untitled model will be created and a subsystem inside that model will be created.

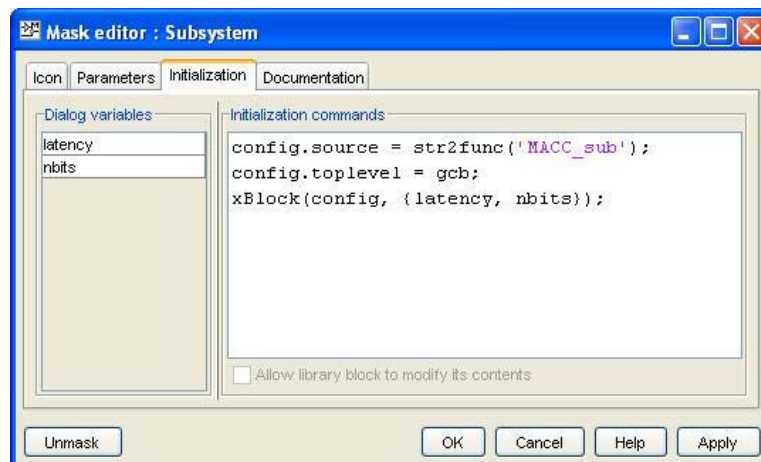


Alternatively you can use the MATLAB struct call to create the toplevel configuration:


```
xBlock(struct('source', str2func(MACC_sub), 'toplevel', gcb), {latency,
                                                                nbits});
```

Then click **OK**.


You'll get the following subsystem.

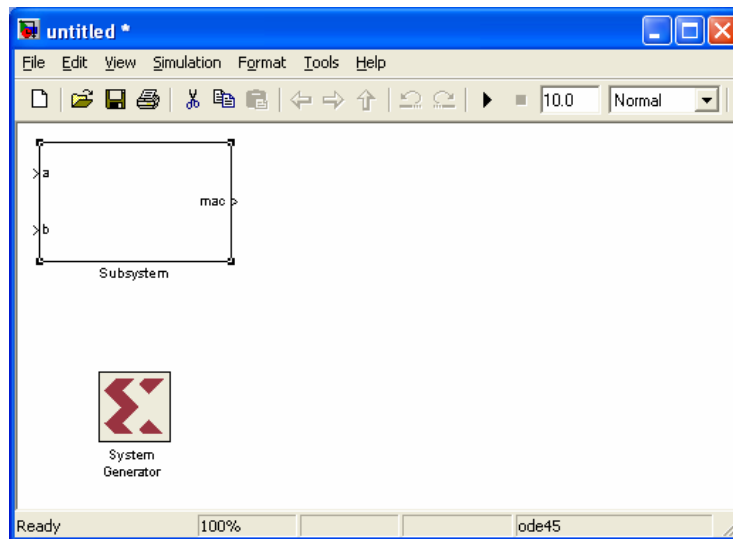

4. Set the mask parameters as shown in the following figure, then click OK:

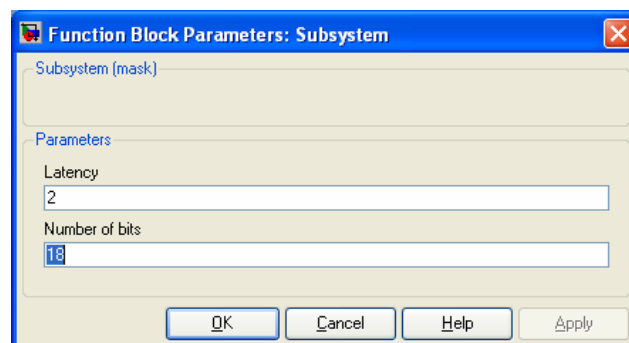

The following diagram is generated:

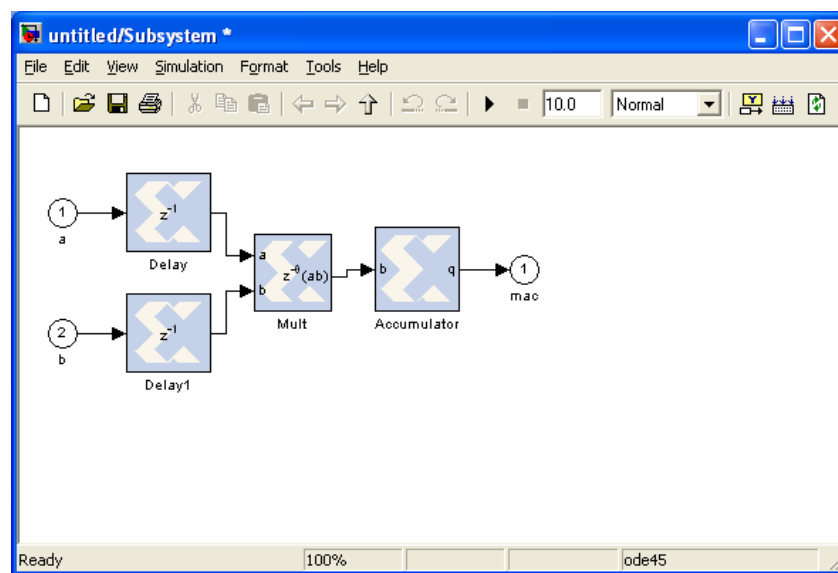

Debugging Tip: Open `MACC_sub.m` in the MATLAB editor to debug the function. By default the `xBlock` constructor will do an auto layout in the end. If you want to see the auto layout every time a block is added, invoke the toplevel `xBlock` as the following:

```
config.source = str2func('MACC_sub');  
config.toplevel = gcb;  
config.debug = 1;  
xBlock(config, {latency, nbits});
```

By setting the `debug` field of the configuration struct to be 1, you're running the PG API in debug mode where every action will trigger an auto layout.

Caching Tip: Most often you only want to re-generate the subsystem if needed. The `xBlock` constructor has a caching mechanism. You can specify the list of dependent files in a cell array, and set the 'depend' field of the toplevel configuration with this list. If any file in the 'depend' list is changed, or the argument list that passed to the toplevel function is changed, the subsystem will be re-generated. If you want to have the caching capability for the `MACC_sub`, invoke the toplevel `xBlock` as the following:

```
config.source = str2func('MACC_sub');  
config.toplevel = gcb;  
config.depend = {'MACC_sub.m'};  
xBlock(config, {latency, nbits});
```

The `depend` field of the configuration struct is a cell array. Each element of the array is a file name. You can put a p-file name or an M-file name. You can also put a name without a suffix. The `xBlock` will use the first in the path.

PG API Error/Warning Handling & Messages

xBlock Error Messages

Condition	Error Message(s)
When calling <code>xBlock(NoSubSourceBlock, ...)</code> and the source block does not exist	Source block NoSubSourceBlock cannot be found.
When calling <code>xBlock(sourceblock, parameterBinding)</code> , and the parameters are illegal, xBlock will report the Illegal parameterization error. For example, <code>xBlock('AddSub', struct('latency', -1));</code>	Illegal parameterization: Latency Latency is set to a value of -1, but the value must be greater than or equal to 0
When the input port binding list contains objects other than xSignal or xInport:	Only objects of xInport or xSignal can appear in inport binding list.
When the output port binding list contains objects other than xSignal or xOutport:	Only objects of xOutport or xSignal can appear in outport binding list.
If the first argument of xBlock is a function pointer, the 2nd argument of xBlock is expected to be a cell array, otherwise, an error will be thrown:	Cell array is expected for the second argument of the xBlock call
If the source configuration struct has toplevel defined, it must point to a Simulink subsystem and it must be a char array, otherwise, an error will be thrown:	Top level must be a char array
If an object in the outport binding list has already been driven by something, i.e. if you try to have two driving sources, an error will be thrown. (Note: the error message is not intuitive, we will fix it later.)	Source of xSignal object already exists

xInport Error Messages

Condition	Error Message(s)
If you try to create an xInport object with the same name the second time, an error will be thrown. For example, if you call <code>p = xInport('a', 'a')</code> .	A new block named 'untitled/Subsystem/a' cannot be added.

xOutput Error Messages

Condition	Error Message(s)
If you try to create an xOutput object with the same name the second time, an error will be thrown. For example, if you call <code>p = xOutput('a', 'a')</code> .	A new block named 'untitled/Subsystem/a' cannot be added.
If you try to bind an xOutput object twice, an error will be thrown. For example, the following sequence of calls will cause an error: <code>[a, b] = xInport('a', 'b'); c = xOutput('c'); c.bind(a); c.bind(b);</code>	The destination port already has a line connection.

xSignal Error Messages

Condition	Error Message(s)
If you try to bind an xSignal object with two sources, an error will be thrown. For example, the following sequence of calls will cause an error: <code>[a, b] = xInport('a', 'b'); sig = xSignal; sig.bind(a); sig.bind(b);</code>	Source of xSignal object already exists.

xsub2script Error Messages

Condition	Error Message(s)
xsub2script is invoked without any argument.	An argument is expected for xsub2script
The first argument is not a subsystem or the model is not opened.	The first argument must be a model, subsystem, or a block. Please make sure the model is opened or the argument is a valid string for a model or a block.
A subsystem has simulink function calls in its mask initialization code.	Subsystem has Simulink function calls, such as <code>gcb</code> , <code>get_param</code> , <code>set_param</code> , <code>add_block</code> . Please remove these calls and run xsub2script again or you can pick a different subsystem to run xsub2script.
The subsystem has Goto blocks.	You have the following Goto blocks, please modify the model to remove them and run xsub2script again.

C++ Access to Shared Memory Blocks

The System Generator API is centered around the classes defined in the file `SharedMemory.h`. Within each class there are functions that enable you to gain access to the System Generator data. To this API, you need to include `SharedMemory.h` (found in `sysgen/include`) and link against `sysgen.dll` (found in `sysgen/lib`).

The following objects are defined in the Sysgen Namespace:

`SharedMemory` class

`LockableSharedMemory` class

`SharedMemoryProxy` class

`Request Struct`

`NamedPipeReader` class

`NamedPipeWriter` class

M-Code Access to Hardware Co-Simulation

Hardware co-simulation in System Generator brings on-chip acceleration and verification capabilities into the Simulink simulation environment. In the typical System Generator flow, a System Generator model is first compiled for a hardware co-simulation platform, during which a hardware implementation (bitstream) of the design is generated and associated to a hardware co-simulation block. The block is inserted into a Simulink model and its ports are connected with appropriate source and sink blocks. The whole model is simulated while the compiled System Generator design is executed on an FPGA device.

Alternatively, it is possible to programmatically control the hardware created through the System Generator hardware co-simulation flow using MATLAB M-code (M-Hwcosim). The M-Hwcosim interfaces allow for MATLAB objects that correspond to the hardware to be created in pure M-code, independent of the Simulink framework. These objects can then be used to read and write data into hardware.

This capability is useful for providing a scripting interface to hardware co-simulation, allowing for the hardware to be used in a scripted test-bench or deployed as hardware acceleration in M-code. Apart from supporting the scheduling semantics of a System Generator simulation, M-Hwcosim also gives the flexibility for any arbitrary schedule to be used. This flexibility can be exploited to improve the performance of a simulation, if the user has apriori knowledge of how the design works. Additionally, the M-Hwcosim objects provide accessibility to the hardware from the MATLAB console, allowing for the hardware internal state to be introspected interactively.

Compiling Hardware for Use with M-Hwcosim

Compiling hardware for use in M-Hwcosim follows the same flow as the typical System Generator hardware co-simulation flow. You start off with a System Generator model in Simulink, select a hardware co-simulation target in the System Generator token and click "Generate". At the end of the generation, a hardware co-simulation library will be created.

Among other files in the netlist directory, a bit file and an hwc file can be found. The bit file corresponds to the FPGA implementation, and the hwc file contains information required for M-Hwcosim. Both bit file and hwc file will be paired by name, e.g. `mydesign_cw.bit` and `mydesign_cw.hwc`.

The hwc file specifies additional meta information for describing the design and the chosen hardware co-simulation interface. With the meta information, a hardware co-simulation instance can be instantiated using M-Hwcosim, through which a user can interact with the co-simulation engine.

M-Hwcosim inherits the same concepts of ports, shared memories, and fixed point notations as found in the existing co-simulation block. Every design exposes its top-level ports and embedded shared memories for external access.

M-Hwcosim Simulation Semantics

The simulation semantics for M-Hwcosim differs from that used during hardware co-simulation in a System Generator block diagram; the M-Hwcosim simulation semantics is more flexible and is capable of emulating the simulation semantics used in the block-based hardware co-simulation.

In the block-based hardware co-simulation, a rigid simulation semantic is imposed; before advancing a clock cycle, all the input ports of the hardware co-simulation are written to. Next all the output ports are read and the clock is advanced. In M-Hwcosim the scheduling of when ports are read or written to, is left to the user. For instance it would be possible to create a program that would only write data to certain ports on every other cycle, or to only read the outputs after a certain number of clock cycles. This flexibility allows users to optimize the transfer of data for better performance.

Data Representation

M-Hwcosim uses fixed point data types internally, while it consumes and produces double precision floating point values to external entities. All data samples passing through a port or a memory location in a shared memory are fixed point numbers. Each sample has a preset data width and an implicit binary point position that are fixed at the compilation time. Data conversions (from double precision to fixed point) happen on the boundary of M-Hwcosim. In the current implementation, quantization of the input data is handled by rounding, and overflow is handled by saturation.

Interfacing to Hardware from M-Code

When a model has been compiled for hardware co-simulation, the generated bitstream can be used in both a model-based Simulink flow, or in M-code executed in MATLAB. The general sequence of operations to access a bitstream in hardware typically follows the sequence described below.

1. Configure the hardware co-simulation interface. Note that the hardware co-simulation configuration is persistent and is saved in the hwc file. If the co-simulation interface is not changed, there is no need to re-run this step.
2. Create a M-Hwcosim instance for a particular design
3. Open the M-Hwcosim interface
4. Repeatedly run the following sub-steps until the simulation ends
 - a. Write simulation data to input ports
 - b. Read simulation data from output ports
 - c. Advance the design clock by one cycle
5. Close the M-Hwcosim interface
6. Release the M-Hwcosim instance

M-Hwcosim Examples

Tutorial Example: Using MATLAB Hardware Co-Simulation (M-Hwcosim)


The following step-by-step tutorial will show you how to perform MATLAB hardware co-simulation using a simple AddSub model that is comprised of two inputs and one output -- two operands (x1, x2) and one summation output (y).

Note: This step-by-step tutorial assumes that you have already installed and configured both the hardware and software required to run on an ML506 platform for Ethernet Hardware Co-Simulation. Refer to the topic **Installing an ML506 Platform for Ethernet Hardware Co-Simulation** for more information of how to install and configure this platform.


The AddSubExample design is located at the following pathname:

```
<sysgen_tree>/examples/mhwcosim/AddSubExample.mdl
```

1. Open the model in MATLAB and observe the following blocks:

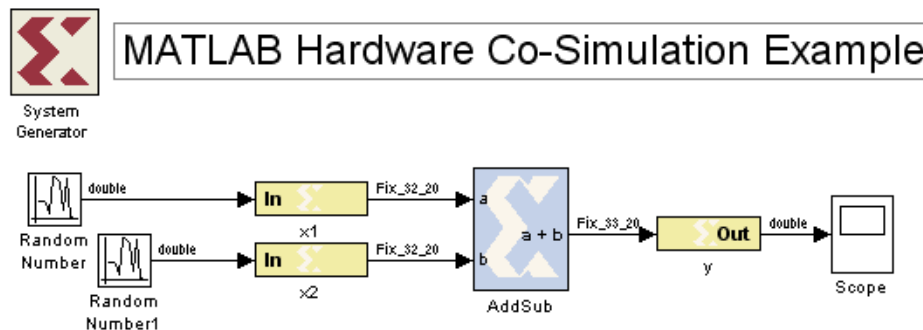


2. Double-click on the System Generator token to bring up the following dialog box.

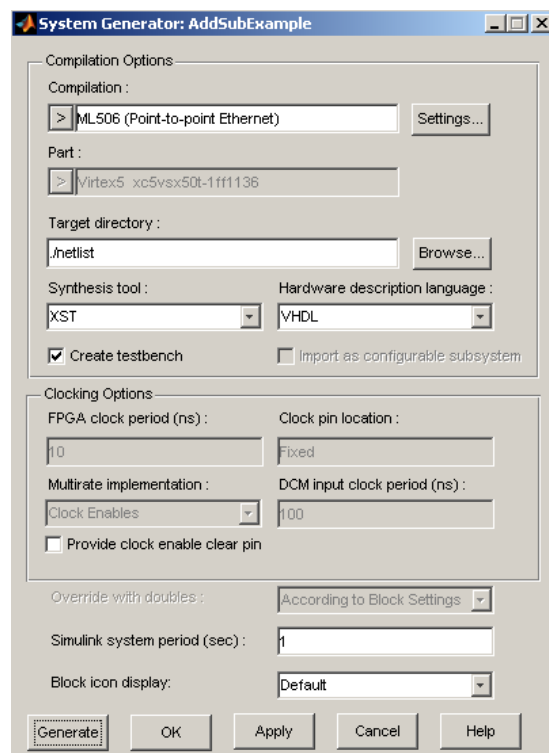


As shown above, the **Create testbench** checkbox is checked to tell the hardware co-simulation compilation flow to auto generate an M-code script `<design>_hwcosim_test.m` and golden test data files `<design>_<port>_hwcosim_test.dat` for each gateway based on the Simulink simulation. After a few moments, a sub-directory named `netlist` is created in the current working directory containing the generated files. For more information about the auto testbench generation, refer to the topic [Automatic Generation of M-Hwcosim Testbench](#).

3. Click **Generate** to begin generating the hardware co-simulation netlist. So far, the design flows are exactly the same as those for the Simulink hardware co-simulation.
4. Once netlist generation is complete, you are now ready to perform MATLAB Hardware Co-simulation. Run the provided M-code script at pathname `./examples/mhwcosim/AddSubExample/AddSubExample.mdl/mhwcosim.m` by either typing **mhwcosim** in the MATLAB console or right-clicking on the file and selecting the **Run** as shown below:

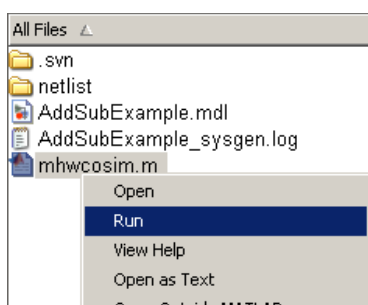

Note: This M-code script is created by slightly modifying the auto-generated M-code script to print out some simulation results.

5. The first time the model is simulated, you should see the following configuration dialog box pop up. Set parameters according to your computer and cable type as shown below and click OK.

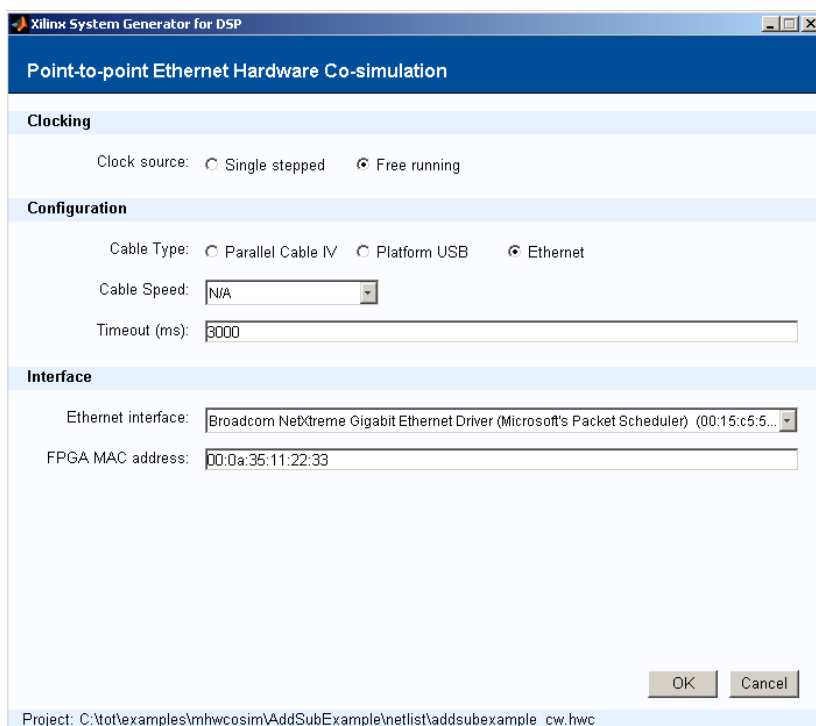

6. After about 30 seconds, you should observe the simulation results in the MATLAB console as shown below:

Simulation OK

Cycle	Expected values	Actual values
0	2.3299064636230469	2.3299064636230469
1	3.3922843933105469	3.3922843933105469
2	-2.8923435211181641	-2.8923435211181641
3	-0.7200584411621094	-0.7200584411621094
4	-0.0897617340087891	-0.0897617340087891
5	1.0269565582275391	1.0269565582275391
6	0.7500820159912109	0.7500820159912109
7	-0.6458797454833984	-0.6458797454833984
8	1.6952972412109375	1.6952972412109375
9	-1.1141872406005859	-1.1141872406005859

Summary

In addition to the Simulink hardware co-simulation, System Generator provides another methodology to perform hardware co-simulation by offering MATLAB hardware co-simulation. This feature enables you to programmatically control the hardware, created through the System Generator hardware co-simulation flow, using MATLAB M-code (M-Hwcosim). The M-Hwcosim interfaces allow for MATLAB objects that correspond to the hardware to be created in pure M-code, independent of the Simulink framework. These objects can then be used to read and write data into hardware. For more details on how to use Read and Write and other supported functions, refer to the topic [M-Hwcosim MATLAB Class](#).

This capability is also useful for providing a scripting interface to hardware co-simulation that allows the hardware to be used in a scripted test-bench or deployed as hardware acceleration in M-code. In certain design applications, you may find some improvement in performance using this method of hardware co-simulation.

Example 2

This M-code uses an alternative form of syntax to perform the simulation described in the previous example. This form uses the `exec` instruction and provides better simulation performance by reducing the number of name-based lookups required to identify ports on a block, and also by folding the execution of code in an M-code for-loop into a single instruction, which reduces the over-head associated with interpreting the M-code.

```
% Configure the co-simulation interface. Note: This needs only to be
% done once, since the configuration is stored back into the hwc file
% This will launch a configuration GUI.
xlHwcosimConfig('mydesign.hwc');

% Define the number of simulation cycles.
nCycles = 1000;

% Creates a hardware co-simulation instance from the project
% 'mydesign.hwc'.
h = Hwcosim('mydesign.hwc');

% Opens and configures the hardware co-simulation interface.
open(h);

% Initializes the 'op' input port with a constant value zero.
write(h, 'op', 0);

% Initializes an execution definition that covers the input ports,
% x1 and x2, and the output ports y. It returns an execution
% identifier for use in subsequent exec instructions.
execId = initExec(h, {'x1', 'x2'}, {'y'});

% Simulate the design using the exec instruction.
% The input data are given as a 2-D matrix. Each row of the matrix
% gives the simulation data of an input port for all the cycles.
% For example, row i column j stores the data for the i-th port at
% (j-1)th cycle.
result = exec(h, execId, nCycles, rand(2, nCycles));

% Releases the hardware co-simulation instance.
% The hardware co-simulation interface is closed implicitly.
release(h);
```

Example 3

This example shows how M-code is used to access Shared Memories in an M-Hwcosim flow. The example assumes that a System Generator model, with a Shared Memory called 'MyMem', and two SharedFifos called 'WriteFifo' and 'ReadFifo', has been compiled into a hardware co-simulation block.

Note: The model and source code for this example can be found at pathname <Sysgen_tree>/examples/mhwcosim/ShMemExample

```
% Creates a hardware co-simulation instance from the project
'shmem.hwc'.
h = Hwcosim('shmem.hwc');

% Opens and configures the hardware co-simulation interface.
open(h);

% Creates a shared memory instance 'MyMem'. It connects the
corresponding
% shared memory running in hardware.
m = Shmem('MyMem');

% Creates a shared FIFO instance 'WriteFifo' for writing data to the
% hardware. Similarly, creates another shared FIFO instance 'ReadFifo'
for
% reading data from the hardware.
wf = Shfifo('WriteFifo');
rf = Shfifo('ReadFifo');

% Writes random numbers to memory address 0 to 49 of MyMem.
m(0:49) = rand(1, 50);

% Read the value at memory address 100 of MyMem.
y = m(100);

% Writes 10 random numbers to WriteFifo if it has 10 or more empty
space.
if wf.Available >= 10
    write(wf, 10, rand(1, 10));
end

% Reads 5 values from ReadFifo if it has 5 or more data.
if rf.Available >= 5
    d = read(rf, 5);
end

% Releases the shared memory instances.
release(m);
release(wf);
release(rf);

% Releases the hardware co-simulation instance.
release(h);
```

Automatic Generation of M-Hwcosim Testbench

M-Hwcosim enables the testbench generation for hardware co-simulation. When the **Create testbench** option is checked in the System Generator GUI, the hardware co-simulation compilation flow generates an M-code script (<design>_hwcosim_test.m) and golden test data files (<design>_<port>_hwcosim_test.dat) for each gateway based on the Simulink simulation. The M-code script uses the M-Hwcosim API to implement a testbench that simulates the design in hardware and verifies the results against the golden test data. Any simulation mismatch is reported in a result file (<design>_hwcosim_test.results).

As shown below in Example 4, the testbench code generated is easily readable and can be used as a basis for your own simulation code.

Note: The model for this example can be found at pathname <Sysgen_tree>/examples/mhwcosim/MultiRatesExample

Example 4

```
function multi_rates_cw_hwcosim_test
try
    % Define the number of hardware cycles for the simulation.
    ncycles = 10;

    % Load input and output test reference data.
    testdata_in2 = load('multi_rates_cw_in2_hwcosim_test.dat');
    testdata_in3 = load('multi_rates_cw_in3_hwcosim_test.dat');
    testdata_in7 = load('multi_rates_cw_in7_hwcosim_test.dat');
    testdata_pb00 = load('multi_rates_cw_pb00_hwcosim_test.dat');
    testdata_pb01 = load('multi_rates_cw_pb01_hwcosim_test.dat');
    testdata_pb02 = load('multi_rates_cw_pb02_hwcosim_test.dat');
    testdata_pb03 = load('multi_rates_cw_pb03_hwcosim_test.dat');
    testdata_pb04 = load('multi_rates_cw_pb04_hwcosim_test.dat');

    % Pre-allocate memory for test results.
    result_pb00 = zeros(size(testdata_pb00));
    result_pb01 = zeros(size(testdata_pb01));
    result_pb02 = zeros(size(testdata_pb02));
    result_pb03 = zeros(size(testdata_pb03));
    result_pb04 = zeros(size(testdata_pb04));

    % Initialize sample index counter for each sample period to be
    % scheduled.
    insp_2 = 1;
    insp_3 = 1;
    insp_7 = 1;
    outsp_1 = 1;
    outsp_2 = 1;
    outsp_3 = 1;
    outsp_7 = 1;

    % Define hardware co-simulation project file.
    project = 'multi_rates_cw.hwc';

    % Create a hardware co-simulation instance.
    h = Hwcosim(project);

    % Open the co-simulation interface and configure the hardware.
    try
```

```

        open(h);
    catch
        % If an error occurs, launch the configuration GUI for the user
        % to change interface settings, and then retry the process again.
        release(h);
        xlHwcosimConfig(project, true);
        drawnow;
        h = Hwcosim(project);
        open(h);
    end

    % Simulate for the specified number of cycles.
    for i = 0:(ncycles-1)

        % Write data to input ports based their sample period.
        if mod(i, 2) == 0
            h('in2') = testdata_in2(insp_2);
            insp_2 = insp_2 + 1;
        end
        if mod(i, 3) == 0
            h('in3') = testdata_in3(insp_3);
            insp_3 = insp_3 + 1;
        end
        if mod(i, 7) == 0
            h('in7') = testdata_in7(insp_7);
            insp_7 = insp_7 + 1;
        end

        % Read data from output ports based their sample period.
        result_pb00(outsp_1) = h('pb00');
        result_pb04(outsp_1) = h('pb04');
        outsp_1 = outsp_1 + 1;
        if mod(i, 2) == 0
            result_pb01(outsp_2) = h('pb01');
            outsp_2 = outsp_2 + 1;
        end
        if mod(i, 3) == 0
            result_pb02(outsp_3) = h('pb02');
            outsp_3 = outsp_3 + 1;
        end
        if mod(i, 7) == 0
            result_pb03(outsp_7) = h('pb03');
            outsp_7 = outsp_7 + 1;
        end

        % Advance the hardware clock for one cycle.
        run(h);

    end

    % Release the hardware co-simulation instance.
    release(h);

    % Check simulation result for each output port.
    logfile = 'multi_rates_cw_hwcosim_test.results';
    logfd = fopen(logfile, 'w');
    sim_ok = true;
    sim_ok = sim_ok & check_result(logfd, 'pb00', testdata_pb00,
    result_pb00);

```

```

        sim_ok = sim_ok & check_result(logfd, 'pb01', testdata_pb01,
result_pb01);
        sim_ok = sim_ok & check_result(logfd, 'pb02', testdata_pb02,
result_pb02);
        sim_ok = sim_ok & check_result(logfd, 'pb03', testdata_pb03,
result_pb03);
        sim_ok = sim_ok & check_result(logfd, 'pb04', testdata_pb04,
result_pb04);
        fclose(logfd);
        if ~sim_ok
            error('Found errors in simulation results. Please refer to ''%s''
for details.', logfile);
        end

    catch
        err = lasterr;
        try release(h); end
        error('Error running hardware co-simulation testbench. %s', err);
    end

%-----

function ok = check_result(fd, portname, expected, actual)
    ok = false;

    fprintf(fd, ['\n' repmat('=', 1, 95), '\n']);
    fprintf(fd, 'Output: %s\n\n', portname);

    % Check the number of data values.
    nvals_expected = numel(expected);
    nvals_actual = numel(actual);
    if nvals_expected ~= nvals_actual
        fprintf(fd, ['The number of simulation output values (%d) differs '
...
                    'from the number of reference values (%d).\n'], ...
                    nvals_actual, nvals_expected);
        return;
    end

    % Check for simulation mismatches.
    mismatches = find(expected ~= actual);
    num_mismatches = numel(mismatches);
    if num_mismatches > 0
        fprintf(fd, 'Number of simulation mismatches = %d\n',
num_mismatches);
        fprintf(fd, '\n');
        fprintf(fd, 'Simulation mismatches:\n');
        fprintf(fd, '-----\n');
        fprintf(fd, '%10s %40s %40s\n', 'Cycle', 'Expected values', 'Actual
values');
        fprintf(fd, '%10d %40.16f %40.16f\n', ...
[mismatches-1; expected(mismatches); actual(mismatches)]);
        return;
    end

    ok = true;
    fprintf(fd, 'Simulation OK\n');

```


Resource Management

M-Hwcosim manages resources that it holds for an hardware co-simulation instance. It releases the held resources upon the invocation of the release instruction or when MATLAB exits. However, it is recommended to perform an explicit cleanup of resources when the simulation finishes or throws an error. To allow proper cleanup in case of errors, it is suggested to enclose M-Hwcosim instructions in a MATLAB try-catch block as illustrated below.

```
try
    % M-Hwcosim instructions here
catch
    err = lasterror;
    % Release any Hwcosim, Shmem, or Shfifo instances
    try release(hwcosim_instance); end
    try release(shmem_instance); end
    try release(shfifo_instance); end
    rethrow(err);
end
```

The following commands can be used to release all hardware co-simulation or shared memory instances.

```
xlHwcosim('release');      % Release all Hwcosim instances
xlHwcosim('releaseMem');   % Release all Shmem instances
xlHwcosim('releaseFifo');  % Release all Shfifo instances
```

M-Hwcosim MATLAB Class

Hwcosim

The Hwcosim MATLAB class provides a higher level abstraction of the hardware co-simulation engine. Each instantiated Hwcosim object represents a hardware co-simulation instance. It encapsulates the properties, such as the unique identifier, associated with the instance. Most of the instruction invocations take the Hwcosim object as an input argument. For further convenience, alternative shorthand is provided for certain operations. Similarly, the Shmem and Shfifo class are provided for accessing shared memory and shared FIFO related operations, respectively.

Actions	Syntax
Constructor	<code>h = Hwcosim(project)</code>
Destructor	<code>release(h)</code>
Open hardware	<code>open(h)</code>
Close hardware	<code>close(h)</code>
Write data	<code>write(h, inPorts, inData)</code> <code>h(inPorts) = inData</code>
Read data	<code>outData = read(h, outPorts)</code> <code>outData = h(outPorts)</code>

Actions	Syntax
Run	<code>run(h)</code> <code>run(h, n)</code>
Vectorized Execution	<code>outData = exec(h, execId, nCycles, inData)</code>
Get properties	<code>data = get(h, prop)</code>

Constructor

Syntax

```
h = Hwcosim(project);
```

Description

Creates an Hwcosim instance. Note that an instance is a reference to the hardware co-simulation project and does not signify an explicit link to hardware; creating a Hwcosim object informs the Hwcosim engine where to locate the FPGA bitstream, it does not download the bitstream into the FPGA. The bitstream is only downloaded to the hardware after an open command is issued.

The project argument should point to the hwc file that describes the hardware co-simulation.

Destructor

Syntax

```
release(h);
```

Description

Releases the resources used by the Hwcosim object h. If a link to hardware is still open, release will first close the hardware.

Open hardware

Syntax

```
open(h);
```

Description

Opens the connection between the host PC and the FPGA. Before this function can be called, the hardware co-simulation interface must be configured. Use the xlHwcosimConfig utility to configure the hardware co-simulation interface. The argument, h, is an Hwcosim object.

Close hardware

Syntax

```
close(h);
```

Description

Closes the connection between the host PC and the FPGA. The argument, h, is an Hwcosim object.

Write data

Syntax

```
h('portName') = inData;
h({inPortNames}) = [inData];
h([inPortIndices]) = [inData];
write(h, 'portName', inData);
write(h, {inPortNames}, [inData]);
write(h, [inPortIndices], [inData]);
```

Description

Access to ports can be done by name or by index. Port names and indices can be extracted from an Hwcosim instance by getting the Inport property of the Hwcosim object. When ports are referred by name, a cell-array of port names is expected to be followed by an array of data that correspond to the ports. Similarly when ports are referred by index, an array of port indices is expected to be followed by an array of data.

Note: For a large number of read and write operations, specifying multiple ports by names may not be encouraged for the sake of performance. It is recommended to resolve a sequence of port names into an equivalent index sequence using the get instruction, and then use the index sequence for subsequent read and write operations.

Read data

Syntax

```
outData = h('portName');
[outData] = h({outPortNames});
[outData] = h([outPortIndices]);
outData = read(h, 'portName');
[outData] = read(h, {outPortNames});
[outData] = read(h, [outPortIndices]);
```

Description

Access to ports can be done by name or by index. Port names and indices can be extracted from an Hwcosim instance by getting the Outport property of the Hwcosim object. When ports are referred by name, a cell-array of port names is expected to be followed by an array of data that correspond to the ports. Similarly when ports are referred by index, an array of port indices is expected to be followed by an array of data.

Note: For a large number of read and write operations, specifying multiple ports by names may not be encouraged for the sake of performance. It is recommended to resolve a sequence of port names into an equivalent index sequence using the get instruction, and then use the index sequence for subsequent read and write operations.

Run

Syntax

```
run(h);
```

```
run(h, n);
```

Description

When the hardware co-simulation object is configured to run in single-step mode, the run command is used to advance the clock. run(h) will advance the clock by one cycle. run(h,n) will advance the clock by n cycles.

When the hardware co-simulation object is configured to run in free-running mode, the run command has no effect on the clock of the hardware co-simulation. However in JTAG hardware co-simulation, write commands are buffered for efficiency reasons, and the run command can be used to flush the write buffer

Note: Currently the run command has no effect on Ethernet hardware co-simulation in free-running mode; but this behaviour may change in the future.

Get properties

Syntax

```
get(h);
```

```
getrun(h, prop);
```

Description

Get returns the properties associated with the Hwcosim object h. The properties are returned as a MATLAB struct with the following fields.

prop	Description
Id	Internal use
Inport	A struct describing all the input ports
Output	A struct describing all the output ports
Execution	A struct describing the execution schedule
SharedMemory	A struct describing the available shared memories in the object

Create Exec Id

Syntax

```
execId = initExec(h, inPorts, outPorts);
```

```
getrun(h, prop);
```

Description

The **exec** instruction is designed to minimize the overheads inherited in the MATLAB environment. It condenses a sequence of operations into a single invocation of the underlying hardware co-simulation engine, and thus reduces the overheads on interpreting M-codes, and switching between M-codes and the engine. It can provide a significant performance improvement on simulation, compared to using a repetitive sequence of individual **write**, **read**, and **run** instructions.

An execution definition is initialized using the **initExec** instruction, before subsequent executions of that definition can be invoked. Defining an execution is to specify which input and output ports involve in the execution. An execution can be defined on a subset of input and output ports. Only involved ports are read or written during the execution, while other input ports are expected to be driven by the same values, and other output ports are simply ignored.


The **inPorts** and **outPorts** argument in **initExec** can either be cell-arrays of portnames or arrays or port indexes.

Note: Having **initExec** and **exec** instructions separated is solely for performance concerns. The initialization phase is performed before subsequent executions so that it is only a one-time overhead. It is particularly important when we need to break down a simulation into multiple executions under certain circumstances, for example, when the memory cannot hold the input data for all simulation cycles.

An execution operates on a cycle basis, where input and output data are given on every cycle. In multi-rate designs, the internal operations are scheduled on a period of the GCD rate (the common sample period) of involved ports. The number of cycles is required to be a multiple of the LCM rate (the minimum execution length) of involved ports.

Special care is required when mixing the **exec** with individual **read**, **write**, and **run** instructions. Before an execution, the samplings of all involved input and output ports should be aligned on their common sample period boundary. In other words, it is expected to sample the involved ports at the first cycle of the execution. Provided this condition holds, the alignment of sampling is guaranteed for the involved ports when the execution completes, because the execution length is a multiple of the LCM rate.

The figure below illustrates an execution which involves two input ports operating at a sample period of 2 and 4 cycles respectively, and one output port with a sample period of 8 cycles. The common sample period is set to $\text{GCD}(2,4,8) = 2$ cycles, which implies a sequence of write, read, and run operations is invoked on every 2 cycles starting from the first cycle of the execution. The minimum execution length is $\text{LCM}(2,4,8) = 8$ cycles, and thus the execution must be run for a multiple of 8 cycles.

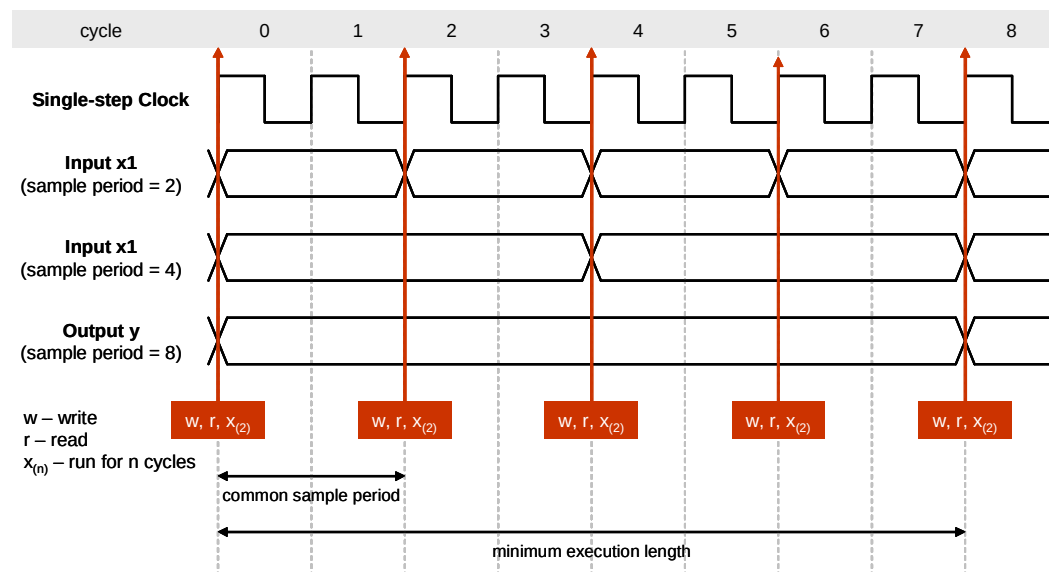

Vectorized execution

Syntax

```
outData = exec(h, execId, nCycles, inData);
```

Description

The **exec** instruction is designed to minimize the overheads inherited in the MATLAB environment. It condenses a sequence of operations into a single invocation of the underlying engine, and thus reduces the overheads on interpreting M-codes, and switching between M-codes and the engine. It can provide a significant performance improvement on simulation, compared to using a repetitive sequence of individual **write**, **read**, and **run** instructions.

The `execId` argument is constructed through a call to `initExec`. `nCycles` specifies the number of simulation cycles to be run and `inData` contains the data used to drive the ports at each cycle. `inData` is a 2D matrix [M,N] where `length(M)` corresponds to the number of `inPorts` specified in `initExec`, and `length(n)` corresponds to the `nCycles`. All port data for the same execution cycle is stored in the same column. For example, the [m,n] element of the `inData` matrix corresponds to the (n-1)-th cycle data sample for the m-th input ports specified in the execution.

M-Hwcosim Shared Memory MATLAB Class

Shmem

The `Shmem` MATLAB class provides an interface into shared memories embedded in hardware co-simulation objects.

Actions	Syntax
Constructor	<code>m = Shmem(memName)</code>
Destructor	<code>release(m)</code>
Write data	<code>write(m, addresses, inData)</code> <code>m(addresses) = inData</code>
Read data	<code>outData = read(m, addresses)</code> <code>outData = m(addresses)</code>
Set properties	<code>set(m, prop, data)</code>
Get properties	<code>data = get(m, prop)</code>

Constructor

Syntax

```
m = Shmem(memName) ;
```

Description

Creates an object handle to a Shared Memory or Shared Register object. The argument is the name of the shared memory as defined in the System Generator model. This is a global object and only one shared memory of a particular name may exist at a time.

Destructor

Syntax

```
release(m);
```

Description

Releases the resources used by the Shmem object.

Write data

Syntax

```
write(m, addresses, inData);
```

```
m(addresses) = inData;
```

Description

When writing to a shared memory, addresses can be an integer or an array of integers specifying the address to write to.

When writing to a shared register, addresses should be set to 0.

Read data

Syntax

```
outData = read(m, addresses);
```

```
outData = m(addresses);
```

Description

When reading from a shared memory, addresses can be an integer or an array of integers specifying the address to read from.

When reading from a shared register, addresses should be set to 0.

Set properties

Syntax

```
set(m, prop, data);
```

Description

Used to set the properties of the Shmem object.

Get properties

Syntax

```
data=get(m);
```

```
data=get(m, prop);
```

Description

Used to get the properties of the Shmem object

M-Hwcosim Shared FIFO MATLAB Class

Shfifo

The Shfifo MATLAB class provides an interface into shared FIFOs embedded in hardware co-simulation objects.

Actions	Syntax
Constructor	<code>m = Shfifo(memName)</code>
Destructor	<code>release(m)</code>
Write data	<code>write(m, numValues, inData)</code>
Read data	<code>outData = read(m, numValues)</code>
Set properties	<code>set(m, prop, data)</code>
Get properties	<code>data = get(m, prop)</code>

Constructor

Syntax

```
m = Shfifo(fifoName);
```

Description

Creates an object handle to a Shared FIFO object. The argument is the name of the shared FIFO as defined in the System Generator model. This is a global object and only one shared memory of a particular name may exist at a time.

Destructor

Syntax

```
release(m);
```

Description

Releases the resources used by the Shfifo object.

Write data

Syntax

```
write(m, numValues, inData);
```

Description

When writing to a Shared FIFO, numValues is an integer that specifies the number of data to write into the FIFO. inData is an array where that data to be written is stored.

Read data

Syntax

```
outData = read(m, numValues);
```

Description

When reading to a Shared FIFO, numValues is an integer that specifies the number of data to read from the FIFO. outData is an array where that data read is stored.

Set properties

Syntax

```
set(m, prop, data);
```

Description

Used to set the properties of the Shfifo object.

Get properties

Syntax

```
data=get(m);
```

```
data=get(m, prop);
```

Description

Used to get the properties of the shfifo object, such as the full flag of the FIFO.

M-Hwcosim Utility Functions

xlHwcosim

Syntax

```
xlHwcosim('release');
```

```
xlHwcosim('releaseMem');
```

```
xlHwcosim('releaseFifo');
```

Description

When a M-Hwcosim, Shared Memory or Shared FIFO objects are created global system resources are used to register each of these objects. These objects are typically freed when a release command is called on the object. xlHwcosim provides an easy way to release all resources used by M-Hwcosim in the event of an unexpected error. The release functions for each of the objects should be used if possible since the xlHwcosim call release the resources for all instances of a particular type of object.

xlHwcosim('release') release all instances of Hwcosim objects.

xlHwcosim('releaseMem') release all instances of Shmem objects

xlHwcosim('releaseFifo'); release all instances of Shfifo objects

xlHwcosimConfig

Syntax

```
xlHwcosimGetDesignInfo;
```


```
xlHwcosimGetDesignInfo('netlist')
```

```
xlHwcosimGetDesignInfo('c:/design/macfir_cw.hwc')
```

Description

xlHwcosimConfig launches a graphical front-end (shown below) to configure the settings of the Hardware Co-simulation interface. It is equivalent to the block GUI launched by

double clicking a Hardware Co-simulation block in Simulink. Its invocation is similar to `xlHwcosimGetDesignInfo`.

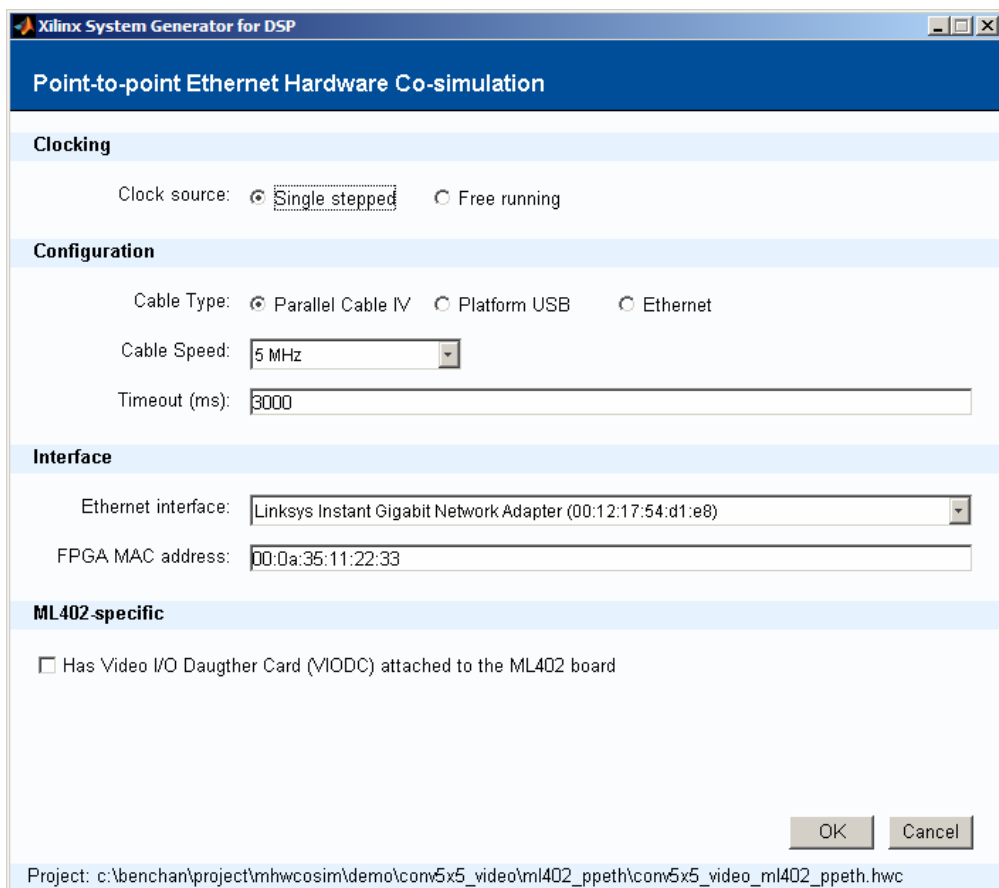

`xlHwcosimGetDesignInfo`

Syntax

```
xlHwcosimGetDesignInfo;  
xlHwcosimGetDesignInfo('netlist')  
xlHwcosimGetDesignInfo('c:/design/macfir_cw.hwc')
```

Description

`xlHwcosimGetDesignInfo` is used to retrieve the information of a design in a hwc file. By default, it takes a hwc file as input, and returns the design information in a MATLAB struct array. If no hwc file is specified, it searches for the project file in the current directory. If a directory is provided it searches for a hwc file in the given directory.

xlHwcosimSimulate

Syntax

```
outData = xlHwcosimSimulate(project, nCycles, inData)
[o1, o2, ...] = xlHwcosimSimulate(project, nCycles, i1, i2, ...)
outData = xlHwcosimSimulate(project, nCycles, struct('Inport',
    inPorts, 'Outport', outPorts, inData)
```

Description

xlHwcosimSimulate provides a one-liner function call to simulate a design with predefined input values. The simulation is done on a cycle basis. The function takes a sequence of data values, one for each input port on each cycle, and returns a sequence of results, one for each output port on each cycle. By default, all input and output ports are involved, and data values are mapped to ports in the ascending order of port indices.

xlHwcosimSimulate is good for simplicity and fits for common simulation purposes, but is limited in several aspects:

- No user-defined simulation semantics
- All simulation cycles are executed as a whole, i.e. cannot set a breakpoint in a simulation cycle
- No shared memory access

SharedMemory

Inherited by [LockableSharedMemory](#) and [SharedMemoryProxy](#).

Public Types

- enum creation_tag_dispatch { creation_tag }
- enum owner_type { base, lockable, proxy }

Public Methods

- SharedMemory (const std::string &name, int nwords, int word_size, creation_tag_dispatch)
- SharedMemory (const std::string &name, unsigned start_address=0, int nwords=INHERIT, int word_size=INHERIT, double timeout_sec=NEVER)
- virtual ~SharedMemory ()
- std::string getName () const
- unsigned getNWords () const
- unsigned getWordSize () const
- owner_type getOwnerType () const
- virtual bool couldBlockOnReadOrWrite () const
- virtual bool read (unsigned addr, StdLogicVector &value, double timeout_sec=NEVER) const
- virtual bool write (unsigned addr, const StdLogicVector &value, double timeout_sec=NEVER)
- virtual bool readArray (unsigned addr, unsigned nwords, StdLogicVectorVector &buffer, double timeout_sec=NEVER) const
- virtual bool writeArray (unsigned addr, unsigned nwords, const StdLogicVectorVector &buffer, double timeout_sec=NEVER)

Static Public Attributes

- const int NEVER = -1
- const int INHERIT = -1

Protected Types

- enum protected_constructor_tag_dispatch { protected_constructor_tag }

Protected Methods

- SharedMemory (const std::string &name, int nwords, int word_size, protected_constructor_tag_dispatch)
- SharedMemory ()

Protected Attributes

- SharedMemoryImpl * _impl

Member Enumeration

enum creation_tag_dispatch

Enumeration values:

creation_tag Used exclusively to distinguish the constructor that creates the physical memory from the constructor that accesses an already extant physical memory

enum owner_type

Enumeration values:

base Physical memory created as SharedMemory

lockable Physical memory created as LockableSharedMemory

proxy Physical memory created as SharedMemoryProxy

enum protected_constructor_tag_dispatch [protected]

Enumeration values:

protected_constructor_tag

Constructors & Destructors

SharedMemory (const std::string & name, int nwords, int word_size, creation_tag_dispatch T)

This tag-dispatched constructor creates the physical memory (shared by the OS) that underlies the object. The caller must specify the number of words that the memory will store as well as the number of bits per word. The final argument to the constructor should be the enumerated constant SharedMemory::creation_tag.

Parameters:

name The name by which the shared memory is published to the operating system, and with which other threads can discover the created memory.

nwords number of words that the memory will store

word_size number of bits per word

T can only hold the value SharedMemory::creation_tag; this parameter is used to make it clear to the compiler that this constructor is desired and not the constructor which finds and existing Shared Memory with the specified name

SharedMemory (const std::string & name, unsigned start_address = 0, int nwords = INHERIT, int word_size = INHERIT, double timeout_sec = NEVER)

This constructor creates a SharedMemory instance that utilizes an already created physical memory store. The existing memory is found, through the OS, via the supplied name. If the named memory does not already exist, and does not come to exist before the timeout expires, a Sysgen::Error is thrown.

Parameters:

name The name by which the shared memory was published to the operating system.

start_address An offset into the address space of the physical memory (defaults to zero).

nwords The size of the imaged memory. Could be smaller than the physical memory's size, but if it is larger (or extends beyond the end of the physical memory if **start_address** is set), a `Sysgen::Error` will be thrown. Defaults to `INHERIT`, in which case the imaged memory will extend to the end of the physical memory.

word_size Number of bits per word. Must match the physical memory, or a `Sysgen::Error` will be thrown. Defaults to `INHERIT`.

timeout_sec The period, in seconds, for which the constructor will wait for the physical shared memory to be made available through the OS. Defaults to 15 seconds. Can be set to `NEVER`.

`~SharedMemory () [virtual]`

The destruction of a `SharedMemory` object releases its handle to the physical memory that is being shared across the OS. The physical memory is a reference counted resource; it is freed when all handles to the resource are released. Thus if a memory is created by one thread and then accessed by a second thread, the second thread can continue to access the memory store even after the creating thread destroys the object that created and initialized the physical memory.

`SharedMemory (const std::string & name, int nwords, int word_size, protected_constructor_tag_dispatch T) [protected]`

A protected constructor used by the derived classes -- not part of the public class API.

Parameters:

nwords number of words that the memory will store

word_size number of bits per word

T can only hold the value `SharedMemory::protected_constructor_tag`. This parameter is used to make it clear to the compiler that this constructor is desired and not a public constructor.

`SharedMemory () [protected]`

The default constructor creates a `SharedMemory` with no underlying implementation (the `_impl` pointer is `NULL`). As such, this constructor is declared as private and used only by derived classes which need to establish the implementation of their parent.

Member Functions

`std::string getName () const`

Returns:

The name that was used to create the memory, which is the name that other `SharedMemory` instances can use to attach to the same memory.

`unsigned getNWords () const`

Returns:

The number of words that can be stored in the memory. The memory can be therefore be indexed with addresses 0 through `getNWords()-1`. For a particular `SharedMemory` instance, this value will be constant, i.e., fixed at the time of construction.

`unsigned getWordSize () const`

Returns:

The number of bits per word for the memory. For a particular `SharedMemory` instance, this value will be constant, i.e., fixed at the time of construction.

`Sysgen::SharedMemory::owner_type getOwnerType () const`

Returns:

One of the enumerated constant values:

- ◆ `SharedMemory::base` if the physical memory was created through the base `SharedMemory` constructor.
- ◆ `SharedMemory::lockable` if the physical memory was created through the derived `LockableSharedMemory` constructor.
- ◆ `SharedMemory::proxy` if the physical memory was created through the derived `SharedMemoryProxy` constructor.

`bool couldBlockOnReadOrWrite () const [virtual]`

Returns:

True if a call to `read()` or `write()` could either block (if the `timeout_sec` parameter to the `read/write` call is set to `NEVER`), or timeout. A `SharedMemory` object that did not create the memory could be referencing a memory that was created, on the other side, as either as `LockableSharedMemory` or a `SharedMemoryProxy`. In either of these cases, it is possible for `read/write` calls to block. In the case of a `SharedMemory` object interfacing to a `LockableSharedMemory`, `read` and `write` operations force implicit `acquireLock` and `releaseLock` semantics.

Re-implemented in `LockableSharedMemory`, and `SharedMemoryProxy`.

`bool read (unsigned addr, StdLogicVector & value, double timeout_sec = NEVER) const [virtual]`

Parameters:

addr The address to be read. Must be in the range `[0, getNWords()-1]`, or a `Sysgen::Error` exception will be thrown.

value reference to a `StdLogicVector` whose contents will be overwritten by the value read from memory. The `StdLogicVector` must have been constructed by the caller to have the appropriate type and size.

timeout_sec The period, in seconds, over which the read operation will be attempted.

Returns:

True if the read is successful. If `timeout_sec` is set to `NEVER`, then the read method will either return true or never return. If the read method returns false, the operation timed out.

See also: `couldBlockOnReadOrWrite()`, `readArray()`.

```
bool write (unsigned addr, const StdLogicVector & value, double timeout_sec  
= NEVER) [virtual]
```

Parameters:

addr The address to be written. Must be in the range [0, getNWords()-1], or a Sysgen::Error exception will be thrown.

value reference to a StdLogicVector whose contents will be copied into the physical, shared memory. The StdLogicVector must have been constructed by the caller to have the appropriate number of bits to match the memory.

timeout_sec The period, in seconds, over which the write operation will be attempted.

Returns:

True if the write is successful. If timeout_sec is set to NEVER, then the write method will either return true or never return. If the write method returns false, the operation timed out.

See also: couldBlockOnReadOrWrite(), writeArray().

```
bool readArray (unsigned addr, unsigned nwords, StdLogicVectorVector &  
buffer, double timeout_sec = NEVER) const [virtual]
```

Parameters:

addr The first address to be read. Must be in the range [0, getNWords()-1], or a Sysgen::Error exception will be thrown.

nwords The number of words to be read.

buffer Reference to a StdLogicVectorVector whose contents will be overwritten by the values read from memory. The StdLogicVectorVector must have been constructed by the caller to have the appropriate type, number of words (equaling or exceeding nwords), and number of bits per word.

If addr+nwords > getNWords(), a Sysgen::Error exception will be thrown.

timeout_sec The period, in seconds, over which the readArray operation will be attempted.

Returns:

True if the read is successful. If timeout_sec is set to NEVER, then the readArray method will either return true or never return. If the readArray method returns false, the operation timed out.

See also: couldBlockOnReadOrWrite(), read().

```
bool writeArray (unsigned addr, unsigned nwords, const  
StdLogicVectorVector & buffer, double timeout_sec = NEVER) [virtual]
```

Parameters:

addr The first address to be written. Must be in the range [0, getNWords()-1], or a Sysgen::Error exception will be thrown.

nwords The number of words to be written.

If addr+nwords > getNWords(), a Sysgen::Error exception will be thrown.

buffer Reference to a StdLogicVectorVector whose contents will be moved into the physical, shared memory. The StdLogicVectorVector must have been constructed by the caller to have the appropriate type, number of words (equaling or exceeding nwords), and number of bits per word.

timeout_sec The period, in seconds, over which the writeArray operation will be attempted.

Returns:

True if the write is successful. If timeout_sec is set to NEVER, then the writeArray method will either return true or never return. If the writeArray method returns false, the operation timed out.

See also: couldBlockOnReadOrWrite(), write().

Member Data

const int NEVER = -1 [static]

Used to parameterize methods with timeout settings such that they never timeout.

Reimplemented in LockableSharedMemory, and SharedMemoryProxy.

const int INHERIT = -1 [static]

Used inherit characteristics from an already created shared memory.

Reimplemented in LockableSharedMemory.

SharedMemoryImpl* _impl [protected]

LockableSharedMemory

Inherits [SharedMemory](#).

Public Types

- typedef void(* callback)(LockableSharedMemory &, void *)

Public Methods

- LockableSharedMemory (const std::string &name, int nwords, int word_size, creation_tag_dispatch)
- LockableSharedMemory (const std::string &name, unsigned start_address=0, int nwords=INHERIT, int word_size=INHERIT, double timeout_sec=15.0)
- virtual ~LockableSharedMemory ()
- virtual bool couldBlockOnReadOrWrite () const
- virtual bool acquireLock (double timeout_sec=NEVER)
- virtual bool acquireLock (callback function, void *arg, double timeout_sec=NEVER)
- virtual bool lockedByMe () const
- virtual void releaseLock ()
- virtual const StdLogicVectorVector & viewAsStdLogicVectorVector () const
- virtual StdLogicVectorVector & viewAsStdLogicVectorVector ()
- const uint32 * getRawDataPtr () const
- uint32 * getRawDataPtr ()

Static Public Attributes

- const int NEVER = -1
- const int INHERIT = -1

Member Typedefs

- typedef void(* callback)(LockableSharedMemory&, void*)

Constructors & Destructors

LockableSharedMemory (const std::string & name, int nwords, int word_size, creation_tag_dispatch T)

Similar to the matching base class (SharedMemory) constructor, but a shared memory with locking (mutex) semantics is created. The LockableSharedMemory class extends the SharedMemory class with acquireLock() and releaseLock() methods.

LockableSharedMemory (const std::string & name, unsigned start_address = 0, int nwords = INHERIT, int word_size = INHERIT, double timeout_sec = 15.0)

Similar to the matching base class (SharedMemory) constructor, but a shared memory with locking (mutex) semantics is created. The LockableSharedMemory class extends the SharedMemory class with acquireLock() and releaseLock() methods.

~LockableSharedMemory () [virtual]

Usage is identical to the base class (SharedMemory) destructor, except that the LockableSharedMemory destructor will release the lock if it is currently holding it.

Member Functions

virtual bool couldBlockOnReadOrWrite () const [inline, virtual]

Returns:

True if a call to read() or write() could either block (if the timeout_sec parameter to the read/write call is set to NEVER), or timeout. A SharedMemory object that did not create the memory could be referencing a memory that was created, on the other side, as either as LockableSharedMemory or a SharedMemoryProxy. In either of these cases, it is possible for read/write calls to block. In the case of a SharedMemory object interfacing to a LockableSharedMemory, read and write operations force implicit acquireLock and releaseLock semantics.

Reimplemented from SharedMemory.

bool acquireLock (double timeout_sec = NEVER) [virtual]

Attempt to acquire the lock.

Parameters:

timeout_sec The period, in seconds, over which the acquireLock operation will be attempted.

Returns:

True if the lock can be obtained within timeout_sec seconds, and false otherwise. If timeout_sec is NEVER, the method invocation will either return true or else never return.

bool acquireLock (callback function, void * arg, double timeout_sec = NEVER) [virtual]

Attempt to acquire the lock, and if successful, set a callback function that other users (in-process) can use to have the lock released. User applications typically should not use this method; it is used in certain internal System Generator applications where there are multiple memory clients in a single thread that could otherwise become deadlocked.

Parameters:

function Callback function that may be invoked by another shared memory client that needs the lock.

arg void* argument that will be passed to the callback function

timeout_sec The period, in seconds, over which the acquireLock operation will be attempted.

Returns:

True if the lock can be obtained within timeout_sec seconds, and false otherwise. If timeout_sec is NEVER, the method invocation will either return true or else never return.

bool lockedByMe () const [virtual]

Returns:

True if the calling instance is holding the lock.

void releaseLock () [virtual]

Release the lock if the calling instance has it. If it does not have the lock, the call becomes a no-op.

const Sysgen::StdLogicVectorVector & viewAsStdLogicVectorVector () const [virtual]

Returns:

A const StdLogicVectorVector reference whose internal data store is mapped onto the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

Sysgen::StdLogicVectorVector & viewAsStdLogicVectorVector () [virtual]

Returns:

A StdLogicVectorVector reference whose internal data store is mapped onto the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

const Sysgen::uint32 * getRawDataPtr () const

Returns:

A const raw data pointer to the internal data store of the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

Sysgen::uint32 * getRawDataPtr ()

Returns:

A raw data pointer to the internal data store of the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

Member Data

`const int NEVER = -1 [static]`

Used to parameterize methods with timeout settings such that they never timeout.

`const int INHERIT = -1 [static]`

Used inherit characteristics from an already created shared memory.

SharedMemoryProxy

Inherits [SharedMemory](#).

Public Types

- `typedef void(* requestServicer )(const Request &, SharedMemoryProxy &, void *arg)`

Public Methods

- `SharedMemoryProxy (const std::string &name, int nwords, int word_size, requestServicer rs, void *rs_arg=NULL)`
- `~SharedMemoryProxy ()`
- `virtual bool couldBlockOnReadOrWrite () const`
- `void service ()`
- `virtual const StdLogicVectorVector & viewAsStdLogicVectorVector () const`
- `virtual StdLogicVectorVector & viewAsStdLogicVectorVector ()`
- `const uint32 * getRawDataPtr () const`
- `uint32 * getRawDataPtr ()`

Static Public Attributes

- `const int NEVER = -1`

Member Typedefs

- `typedef void(* requestServicer)(const Request&, SharedMemoryProxy&, void *arg)`
A function pointer, of the type declared by this typedef, is passed to the constructor of the SharedMemoryProxy constructor. See the constructor documentation for details.

Constructors and Destructors

SharedMemoryProxy (const std::string & name, int nwords, int word_size, requestServicer rs, void * rs_arg = NULL)

This constructor creates the physical memory (shared by the OS) that underlies the object. The caller must specify the number of words that the memory will store as well as the number of bits per word. A SharedMemoryProxy creates a physical memory that allows other clients to request service (read / write), but not to directly access the stored data. The clients can access the memory through the base class SharedMemory object. The service requests are passed off to the SharedMemoryProxy object that created the physical memory. This construction allows the SharedMemoryProxy to marshall data off to remote storage (e.g., the actual stored data may be marshalled off to a hardware platform or to a remote machine).

The function pointer must point to a function that will service the requests to the SharedMemoryProxy (made by other memory clients). These requests can take on the form of read_request's or write_request's as encoded by the passed SharedMemoryProxy::Request object. This object will also contain the number of words to

be read / written and the start address. A reference to the SharedMemoryProxy is also passed to the servicer function, along with the void pointer used in the constructor.

Parameters:

name The name by which the shared memory is published to the operating system, and with which other threads can discover the created memory.

nwords number of words that the memory will store

word_size number of bits per word

rs The callback function that will service memory requests

rs_arg A void* argument that will be passed along the the requestServicer callback

~SharedMemoryProxy ()

Releases the instance's handle to the shared OS resource (through which service requests are made). This is a reference counted resource; it may continue to persist after the SharedMemoryProxy that established it is destroyed. This means that when the SharedMemoryProxy destructor is called any remaining clients of the memory will run into trouble -- in particular any read / write calls that they make will go un-serviced (and either hang or timeout).

Member Functions

virtual bool couldBlockOnReadOrWrite () const [inline, virtual]

Returns:

True if a call to read() or write() could either block (if the timeout_sec parameter to the read/write call is set to NEVER), or timeout. A SharedMemory object that did not create the memory could be referencing a memory that was created, on the other side, as either as LockableSharedMemory or a SharedMemoryProxy. In either of these cases, it is possible for read/write calls to block. In the case of a SharedMemory object interfacing to a LockableSharedMemory, read and write operations force implicit acquireLock and releaseLock semantics.

Re-implemented from SharedMemory.

void service ()

Will check to see if a client has made a service request, and if it has, the requestServicer callback (established by the SharedMemoryProxy constructor) will be called.

const Sysgen::StdLogicVectorVector & viewAsStdLogicVectorVector () const [virtual]

Returns:

A const StdLogicVectorVector reference whose internal data store is mapped onto the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

Sysgen::StdLogicVectorVector & viewAsStdLogicVectorVector () [virtual]

Returns:

A StdLogicVectorVector reference whose internal data store is mapped onto the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

`const Sysgen::uint32 * getRawDataPtr () const`

Returns:

A const raw data pointer to the internal data store of the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

`Sysgen::uint32 * getRawDataPtr ()`

Returns:

A raw data pointer to the internal data store of the physical shared memory. This method should only be used in high-performance applications. It allows fast, but unchecked and therefore dangerous, access.

Member Data

`const int NEVER = -1 [static]`

Used to parameterize methods with timeout settings such that they never timeout.

Re-implemented from SharedMemory.

Request Struct

Public Types

- enum Type { read_request, write_request }

Static Public Attributes

- enum Sysgen::SharedMemoryProxy::Request::Type type
- unsigned start_address
- unsigned nwords

Used to encode information passed to SharedMemoryProxy::requestServicer callback functions. For details, see the SharedMemoryProxy constructor documentation.

Member Enumerations

enum Type

Enumeration values:

read_request client wants to read the memory

write_request client wants to write to the memory

Member Data

enum Sysgen::SharedMemoryProxy::Request::Type type

unsigned start_address

first address to read / write

unsigned nwords

number of words to read / write

NamedPipeReader

Public Methods

- `NamedPipeReader (const std::string &name, int nwords=INHERIT, int word_size=INHERIT, double timeout_sec=15.0)`
- `~NamedPipeReader ()`
- `void peek (StdLogicVector &value) const`
- `bool read (StdLogicVector &value, double timeout_sec=NEVER)`
- `bool readArray (unsigned nwords, StdLogicVectorVector &buffer, double timeout_sec=NEVER)`
- `unsigned getNWords () const`
- `unsigned getWordSize () const`
- `bool isEmpty () const`
- `unsigned numAvailable () const`

Static Public Attributes

- `const int NEVER = -1`
- `const int INHERIT = -1`

Constructors & Destructors

`NamedPipeReader (const std::string & name, int nwords = INHERIT, int word_size = INHERIT, double timeout_sec = 15.0)`

This constructor creates a `NamedPipeReader` instance that will read data from a named pipe that was previously created by a `NamedPipeWriter`. The name pipe is found, through the OS, via the supplied name. If the named pipe does not already exist, and does not come to exist before the timeout expires, a `Sysgen::Error` is thrown.

Parameters:

name The name used by the `NamedPipeWriter` to create the pipe.

nwords Can be smaller than the depth of the pipe created by the `NamedPipeWriter`, but if it is larger, a `Sysgen::Error` will be thrown. Defaults to `INHERIT`.

word_size Number of bits per word. Must match the word size specified by the `NamedPipeWriter`, or a `Sysgen::Error` will be thrown. Defaults to `INHERIT`.

timeout_sec The period, in seconds, for which the constructor will wait for the named pipe to be made available through the OS. Defaults to 15 seconds. Can be set to `NEVER`.

~NamedPipeReader ()

Member Functions

void peek (StdLogicVector & value) const

Retrieves the value that is sitting at the end of the pipe, ie. the same value that would be retrieved through a read() invocation, but without changing the state of the pipe. The word seen by peek() is not removed from the pipe. Because peek(), unlike read(), does not change the state of the pipe, there is no implied mutex requirement, and the operation will always succeed if the pipe is not empty.

If the pipe is empty a Sysgen::Error exception will be thrown.

Parameters:

value reference to a StdLogicVector whose contents will be overwritten by the value from the pipe. The StdLogicVector must have been constructed by the caller to have the appropriate type and size.

See also: read().

bool read (StdLogicVector & value, double timeout_sec = NEVER)

If the pipe is empty a Sysgen::Error exception will be thrown.

See also: peek(), readArray().

Parameters:

value reference to a StdLogicVector whose contents will be overwritten by the value read from the pipe. The StdLogicVector must have been constructed by the caller to have the appropriate type and size.

timeout_sec The period, in seconds, over which the read operation will be attempted. There is an implicit mutex between NamedPipeWriter and NamedPipeReader access to a particular pipe.

Returns:

True if the read is successful. If timeout_sec is set to NEVER, then the read method will either return true or never return. If the read method returns false, the operation timed out.

bool readArray (unsigned nwords, StdLogicVectorVector & buffer, double timeout_sec = NEVER)

If the pipe does not contain sufficient (nwords) words available for, reading, a Sysgen::Error exception will be thrown. The caller should check that nwords < numAvailable().

Parameters:

nwords The number of words to be written.

buffer Reference to a StdLogicVectorVector whose contents will be copied into the pipe. The StdLogicVectorVector must have been constructed by the caller to have the appropriate type, number of words (equaling or exceeding nwords), and number of bits per word.

timeout_sec The period, in seconds, over which the read operation will be attempted. There is an implicit mutex between NamedPipeWriter and NamedPipeReader access to a particular pipe.

Returns:

True if the read is successful. If timeout_sec is set to NEVER, then the readArray method will either return true or never return. If the readArray method returns false, the operation timed out.

See also: read().

unsigned getNWords () const

Returns:

The number of words that the Pipe can hold (not the number currently held).

See also: numAvailable().

unsigned getWordSize () const

Returns:

The number of bits per word for the data conveyed by the pipe. For a particular NamedPipe instance, this value will be constant, i.e., fixed at the time of construction.

bool isEmpty () const [inline]

unsigned numAvailable () const

Returns:

The number of words that are in the pipe and are available for reading.

See also: getNWords().

Member Data

const int NEVER = -1 [static]

Used to parameterize methods with timeout settings such that they never timeout.

const int INHERIT = -1 [static]

Used inherit characteristics from an already created shared memory.

NamedPipeWriter

Public Methods

- NamedPipeWriter (const std::string &name, int nwords, int word_size)
- ~NamedPipeWriter ()
- bool write (const StdLogicVector &value, double timeout_sec=NEVER)
- bool writeArray (unsigned nwords, const StdLogicVectorVector &buffer, double timeout_sec=NEVER)
- unsigned getNWords () const
- unsigned getWordSize () const
- bool isFull () const
- unsigned numAvailable () const

Static Public Attributes

- const int NEVER = -1

Constructors & Destructors

NamedPipeWriter (const std::string & name, int nwords, int word_size)

This constructor creates the physical memory (shared through the OS) that underlies the named pipe object. The caller must specify the number of words that the pipe can hold as well as the number of bits per word.

A named pipe can have only one writer. Nothing prevents it from having more than one reader, or from having readers that come and go.

Parameters:

name The name by which the shared named pipe published to the operating system, and with which other threads can discover it.

nwords number of words that the pipe will hold

word_size number of bits per word

~NamedPipeWriter ()

Releases the instance's handle to the shared OS resource that represents the named pipe. This is a reference counted resource; it may continue to persist after the NamedPipeWriter that established it is destroyed. NamedPipeReader instances that are using the same resource can continue to access it and read out data (until it is empty; there will be no way for new data to be added to the pipe).

Member Functions

bool write (const StdLogicVector & value, double timeout_sec = NEVER)

If the pipe is full a Sysgen::Error exception will be thrown.

Parameters:

value reference to a StdLogicVector whose contents will be copied into the named pipe storage. The StdLogicVector must have been constructed by the caller to have the appropriate number of bits to match the pipe.

timeout_sec The period, in seconds, over which the write operation will be attempted. There is an implicit mutex between NamedPipeWriter and NamedPipeReader access to a particular pipe.

Returns:

True if the write is successful. If timeout_sec is set to NEVER, then the write method will either return true or never return. If the write method returns false, the operation timed out.

See also: writeArray().

**bool writeArray (unsigned nwords, const StdLogicVectorVector & buffer,
double timeout_sec = NEVER)**

If the pipe does not contain sufficient (nwords) space, a Sysgen::Error exception will be thrown.

Parameters:

nwords The number of words to be written.

buffer Reference to a StdLogicVectorVector whose contents will be moved into the named pipe. The StdLogicVectorVector must have been constructed by the caller to have the appropriate type, number of words (equaling or exceeding nwords), and number of bits per word.

timeout_sec The period, in seconds, over which the write operation will be attempted. There is an implicit mutex between NamedPipeWriter and NamedPipeReader access to a particular pipe.

Returns:

True if the write is successful. If timeout_sec is set to NEVER, then the write method will either return true or never return. If the write method returns false, the operation timed out.

See also: write().

unsigned getNWords () const

Returns:

The number of words that the Pipe can hold (not the number currently held).

See also: numAvailable().

unsigned getWordSize () const

Returns:

The number of bits per word for the data conveyed by the pipe. For a particular NamedPipe instance, this value will be constant, i.e., fixed at the time of construction.

bool isFull () const [inline]

unsigned numAvailable () const

Member Data

const int NEVER = -1 [static]

Used to parameterize methods with timeout settings such that they never timeout.

Index

Numerics

2 Channel Decimate by 2 MAC FIR Filter Reference Design 405
2n+1-tap Linear Phase MAC FIR Filter Reference Design 406
2n-tap Linear Phase MAC FIR Filter Reference Design 407
2n-tap MAC FIR Filter Reference Design 408
2Registered Mealy State Machine Reference Design 444
4-channel 8-tap Transpose FIR Filter Reference Design 409
4n-tap MAC FIR Filter Reference Design 410
5x5Filter Reference Design 411

A

Accumulator block 49
Addressable Shift Register block 51
AddSub block 53
Assert block 55

B

Basic Element Blocks 24
BitBasher block 57
Black Box block 60
Block Parameters
 common options 44
Blockset Libraries
 organization of 24
BPSK AWGN Channel Reference Design 413

C

C++ Access 503
C++ access to 503
ChipScope block 67
ChipScope Pro Analyzer
 hardware and software requirements 67
 importing data into MATLAB Workspace 69
 known issues 70
 project file 69
CIC Compiler 1.1 block 71

CIC Compiler 1.2 block 73
CIC Filter Reference Design 414
Clock Enable Probe block 75
Clock Probe block 77
Clocking Options
 Expose Clock Ports 362
 Hybrid DCM-CE 362
CMult block 78
Common Options
 block parameters 44
Communication Blocks 27
Compiling for
 M-Hwcosim 503
Concat block 80
Configurable Subsystem Manager block 81
Constant block 83
Control Logic blocks 27
Convert block 86
Convolutional Encoder Reference Design 416
Convolutional Encoder v3_0 block 87
Convolutional Encoder v6_0 block 89
Convolutional Encoder v6_1 block 91
CORDIC ATAN Reference Design 418
CORDIC DIVIDER Reference Design 419
CORDIC LOG Reference Design 420
CORDIC SINCOS Reference Design 422
CORDIC SQRT Reference Design 423
Counter block 93

D

DAFIR v9_0 block 96
Data Type blocks 29
DCM locked pin 362
DCM reset pin 362
DDS Compiler 2.1 block 107
DDS Compiler v1_1 block 99
DDS Compiler v2_0 block 103
DDS v4_0 block 111
DDS v5_0 block 113
Delay block 116
Depuncture block 120
Disregard Subsystem block 122
Divider Generator 2.0 block 123
Down Sample block 125
DSP Blocks 30

DSP48 block 128
DSP48 Macro block 131
DSP48A block 140
DSP48E block 143
Dual Port Memory Interpolation MAC FIR Filter Reference Design 425
Dual Port RAM block 148

E

EDK Processor block 154
Examples
 M-Hwcosim 505
Expression block 159

F

Fast Fourier Transform 6.0 block 160
FDATool block 167
FFT v1_0 block 168
FFT v3_1 block 172
FFT v3_2 block 177
FFT v4_1 block 182
FFT v5_0 block 187
FIFO block 192
FIR Compiler 4.0 block 193
FIR Compiler v1_0 block 200
FIR Compiler v2_0 block 204
FIR Compiler v3_0 block 208
FIR Compiler v3_1 block 214
FIR Compiler v3_2 block 221
for 503
From FIFO block 228
From Register block 230

G

Gateway In block 232
Gateway Out block 234

H

Hardware Co-Sim
 M-code access to 503
Hardware Co-Simulation
 M-code access to 503

- I**
- Indeterminate Probe block 236
 - Index Blocks 31
 - Interleaver Deinterleaver v4_0 block 237
 - Interleaver Deinterleaver v5_0 block 239
 - Interpolation Filter Reference Design 426
 - Inverter block 241
- J**
- JTAG Co-Simulation block 242
- L**
- LFSR block 244
 - Lockable SharedMemory class 530
 - Logical block 246
 - LogiCORE Versions 399
- M**
- Math blocks 39
 - MATLAB Class
 - Hwcosim 513
 - Shfifo 520
 - Shmem 518
 - m-channel n-tap Transpose FIR Filter Reference Design 427
 - M-Code
 - access to Hardware Co-Sim 503
 - interfacing to hardware 504
 - MCode block 247
 - Mealy State Machine Reference Design 428
 - Memory blocks 41
 - Memory Map View
 - EDK Processor Block 155
 - Memory Stitching
 - From FIFO block 228
 - From Register block 230
 - Shared Memory block 341
 - To FIFO block 371
 - To Register block 373
 - M-Hwcosim
 - automatic generation of testbench 510
 - compiling hardware for 503
 - data representation 504
 - examples 505
 - MATLAB class 513
 - shared FIFO MATLAB class 520
 - shared memory MATLAB Class 518
 - simulation semantics 504
 - utility functions 521
 - MicroBlaze Processor block 268
 - ModelSim block 277
 - Moore State Machine Reference Design 432
 - Mult block 282
 - Multipath Fading Channel Model Reference Design 435
 - Multiple Subsystem Generator block 284
 - Mux block 289
- N**
- NamedPipeReader 538
 - NamedPipeWriter 541
 - Negate block 290
 - Network Ethernet Co-simulation block 291
 - n-tap Dual Port Memory MAC FIR Filter Reference Design 442
 - n-tap MAC FIR Filter Reference Design 443
- O**
- Opmode block 293
- P**
- Parallel to Serial block 296
 - Parameters
 - common options 44
 - Pause Simulation block 297
 - PG API 489
 - Error/Warning Messages 501
 - Introduction 489
 - xBlock 490
 - xBlockHelp 494
 - xInput 491
 - xsub2script 492
 - xOutput 491
 - xSignal 492
 - PG API Examples
 - Hello World 495
 - MACC 496
 - MACC in a Masked Sybsystem 497
 - PicoBlaze Instruction Display block 298
 - PicoBlaze Microcontroller block 299
 - Pipelining
 - saturation and rounding logic multipliers 282
 - PLB v4.6 Support
 - EDK Processor Block 156
 - Setting the Base Memory Space Address 156
 - Point-to-Point Ethernet Co-Simulation block 301
 - Programmatic Generation
 - of System Generator block diagrams 489
 - Puncture block 303
- R**
- Reed-Solomon Decoder 6.1 block 304
 - Reed-Solomon Encoder 6.1 block 308
 - Register block 312
 - Registered Moore State Machine Reference Design 447
 - Reinterpret block 313
 - Relational block 314
 - Request Struct 537
 - Reset Generator block 315
 - Resource Estimator block 316
 - ROM block 319
 - Rounding logic
 - pipelining 282
 - RS Decoder v5_1 block 322
 - RS Decoder v6_0 block 326
 - RS Encoder v5_0 block 330
 - RS Encoder v6_0 block 334
- S**
- Sample Time block 338
 - Saturation Logic
 - pipelining 282
 - Scale block 339
 - Serial to Parallel block 340
 - Shared Memory block 341
 - Shared Memory Blocks 503
 - Shared Memory blocks 42
 - Shared Memory Read block 345
 - Shared Memory Stitching
 - From FIFO block 228
 - From Register block 230
 - Shared Memory block 341
 - To FIFO block 371
 - To Register block 373
 - Shared Memory Write block 347
 - SharedMemory class 524
 - SharedMemory.h 503
 - SharedMemoryProxy class 534

Shift block 349
 Simulation Multiplexer block 350
 SineCosine block 352
 Single Port RAM block 354
 Single-Step Simulation block 359
 Slice block 360
 Synchronous Clocking
 Expose Clock Ports option 362
 Hybrid DCM-CE option 362
 Sysgen Generator
 NamedPipeReader class 538
 NamedPipeWriter class 541
 Sysgen Namespace
 Lockable SharedMemory class 530
 Request Struct 537
 SharedMemory class 524
 SharedMemoryProxy class 534
 sysgen.dll 503
 System Generator block 361
 System Generator Utilities
 xlAddTerms 464
 xlfa_denominator 467
 xlfa_numerator 468
 xlGenerateButton 469
 xlgetparam 470, 471
 xlInstallPlugin 472
 xlLoadChipScopeData 473
 xlSBDBuilder 474
 xlSetNonMemMap 477
 xlsetparam 470
 xlSetUseHDL 478
 xlSwitchLibrary 479
 xlTBUtills 480
 xlTimingAnalysis 484
 xlUpdateModel 485
 xlVersion 488

T

Threshold block 367
 Time Division Demultiplexer block 368
 Time Division Multiplexer block 370
 To FIFO block 371
 To Register block 373
 to shared memory blocks 503
 Tool Blocks 42
 Toolbar block 375
 Tutorials
 M-Hwcosim
 Using MATLAB Hardware Co-Simulation 505

U

Up Sample block 377
 Utility Functions
 for M-Hwcosim 521

V

Virtex Line Buffer (Imaging) Reference Design 450
 Virtex2 5 Line Buffer (Imaging) Reference Design 452
 Virtex2 Line Buffer (Imaging) Reference Design 451
 Viterbi Decoder v5_0 block 379
 Viterbi Decoder v6_0 block 382
 Viterbi Decoder v6_1 block 385

W

WaveScope block 388
 White Gaussian Noise Generator (Communication) Reference Design 453

X

xBlock 490
 Xilinx
 LogiCORE Versions 399
 Xilinx Block Libraries
 Basic Element blocks 24
 Communication blocks 27
 Control Logic blocks 27
 Data Type blocks 29
 DSP blocks 30
 Index blocks 31
 Math blocks 39
 Memory blocks 41
 Shared Memory blocks 42
 Tool blocks 42
 Xilinx Blockset
 Accumulator 49
 Addressable Shift Register 51
 AddSub 53
 Assert 55
 BitBasher 57
 Black Box 60
 ChipScope 67
 CIC Compiler 1.1 71
 CIC Compiler 1.2 73
 Clock Enable Probe 75
 Clock Probe 77

CMult 78
 Concat 80
 Configurable Subsystem Manager 81
 Constant 83
 Convert 86
 Convolutional Encoder v3_0 87
 Convolutional Encoder v6_0 89
 Convolutional Encoder v6_1 91
 Counter 93
 DAFIR v9_0 96
 DDS Compiler 2.1 107
 DDS Compiler v1_1 99
 DDS Compiler v2_0 103
 DDS v4_0 111
 DDS v5_0 113
 Delay 116
 Depuncture 120
 Disregard Subsystem 122
 Divider Generator 2.0 123
 Down Sample 125
 DSP48 128
 DSP48 Macro 131
 DSP48A 140
 DSP48E 143
 Dual Port RAM 148
 EDK Processor 154
 Expression 159
 Fast Fourier Transform 6.0 160
 FDATool 167
 FFT v1_0 168
 FFT v3_1 172
 FFT v3_2 177
 FFT v4_1 182
 FFT v5_0 187
 FIFO 192
 FIR Compiler 4.0 193
 FIR Compiler v1_0 200
 FIR Compiler v2_0 204
 FIR Compiler v3_0 208
 FIR Compiler v3_1 214
 FIR Compiler v3_2 221
 From FIFO 228
 From Register 230
 Gateway In 232
 Gateway Out 234
 Indeterminate Probe 236
 Interleaver Deinterleaver v4_0 237
 Interleaver Deinterleaver v5_0 239
 Inverter 241
 JTAG Co-Simulation 242
 LFSR 244

Logical 246
 MCode 247
 MicroBlaze Processor 268
 ModelSim 277
 Mult 282
 Multiple Subsystem Generator 284
 Mux 289
 Negate 290
 Network Ethernet Co-simulation 291
 Opmode 293
 Parallel to Serial 296
 Pause Simulation 297
 PicoBlaze Instruction Display 298
 PicoBlaze Microcontroller 299
 Point-to-Point Ethernet Co-Simulation 301
 Puncture 303
 Reed-Solomon Decoder 6.1 304
 Reed-Solomon Encoder 6.1 308
 Register 312
 Reinterpret 313
 Relational 314
 Reset Generator 315
 Resource Estimator 316
 ROM 319
 RS Decoder v5_1 322
 RS Decoder v6_0 326
 RS Encoder v5_0 330
 RS Encoder v6_0 334
 Sample Time 338
 Scale 339
 Serial to Parallel 340
 Shared Memory 341
 Shared Memory Read 345
 Shared Memory Write 347
 Shift 349
 Simulation Multiplexer 350
 SineCosine 352
 Single Port RAM 354
 Single-Step Simulation 359
 Slice 360
 System Generator 361
 Threshold 367
 Time Division Demultiplexer 368
 Time Division Multiplexer 370
 To FIFO 371
 To Register 373
 Toolbar 375
 Up Sample 377
 Viterbi Decoder v5_0 379
 Viterbi Decoder v6_0 382

Viterbi Decoder v6_1 385
 WaveScope 388
 XtremeDSP Analog to Digital Converter 456
 XtremeDSP Co-Simulation 457
 XtremeDSP Digital to Analog Converter 459
 XtremeDSP External RAM 460
 XtremeDSP LED Flasher 461
 Xilinx Blockset Libraries
 organization of blocks 24
 Xilinx Reference Design Library
 2 Channel Decimate by 2 MAC FIR Filter 405
 2n+1-tap Linear Phase MAC FIR Filter 406
 2n-tap Linear Phase MAC FIR Filter 407
 2n-tap MAC FIR Filter 408
 4-channel 8-tap Transpose FIR Filter 409
 4n-tap MAC FIR Filter 410
 5x5Filter 411
 BPSK AWGN Channel 413
 CIC Filter 414
 Communication Designs 403
 Control Logic Designs 403
 Convolutional Encoder 416
 CORDIC ATAN 418
 CORDIC DIVIDER 419
 CORDIC LOG 420
 CORDIC SIN COS 422
 CORDIC SQRT 423
 DSP Designs 403
 Dual Port Memory Interpolation
 MAC FIR Filter 425
 Imaging Designs 404
 Interpolation Filter 426
 Math Designs 404
 m-channel n-tap Transpose FIR Filter 427
 Mealy State Machine 428
 Moore State Machine 432
 Multipath Fading Channel Model 435
 n-tap Dual Port Memory MAC FIR Filter 442
 n-tap MAC FIR Filter 443
 Registered Mealy State Machine 444
 Registered Moore State Machine 447
 Virtex Line Buffer (Imaging) 450
 Virtex2 5 Line Buffer (Imaging) 452
 Virtex2 Line Buffer (Imaging) 451

White Gaussian Noise Generator (Communication) 453
 xInput 491
 xlAddTerms 464
 xlBlockHelp 494
 xlfda_denominator 467
 xlfda_numerator 468
 xlGenerateButton 469
 xlgetparam 470, 471
 xlInstallPlugin 472
 xlLoadChipScopeData 473
 xlSBDBuilder 474
 xlSetNonMemMap 477
 xlsetparam 470
 xlSetUseHDL 478
 xsub2script 492
 xlSwitchLibrary 479
 xlTBUtills 480
 xlTimingAnalysis 484
 xlUpdateModel 485
 xlVersion 488
 xOutput 491
 xSignal 492
 XtremeDSP Analog to Digital Converter block 456
 XtremeDSP Co-Simulation block 457
 XtremeDSP Digital to Analog Converter block 459
 XtremeDSP External RAM block 460
 XtremeDSP LED Flasher block 461